

# Torggler



**PRODUCT CATALOG**  
**2023 STANDARD**

# Torggler

**PRODUCT CATALOG  
2023 STANDARD**

## INDEX BY PRODUCT CATEGORY

|                                     |           |                                               |           |
|-------------------------------------|-----------|-----------------------------------------------|-----------|
| <b>01 SEALANTS</b>                  | <b>10</b> | <b>2.1 Polyurethane Adhesives</b>             | <b>39</b> |
| <b>1.1 Primers for Silicones</b>    | <b>11</b> | Panel F                                       | 39        |
| Sitol® Primer Deck Caulking         | 11        | High Tack                                     | 39        |
| Primer Silicone                     | 11        | Hydro                                         | 40        |
| <b>1.2 Silicone Sealants</b>        | <b>12</b> | <b>2.2 Polyurethane Foams</b>                 | <b>40</b> |
| Lamiera                             | 12        | Coppi Merano                                  | 40        |
| Domus                               | 13        | Volt                                          | 41        |
| Marble & Stone                      | 14        | Window & Door                                 | 41        |
| Neutral                             | 14        | Coppi                                         | 42        |
| Low Modulus                         | 15        | Flex 365                                      | 42        |
| Fire Resistant                      | 15        | Fire Resistant                                | 43        |
| Floor                               | 16        | Multiso                                       | 43        |
| Polycarbonate                       | 16        | F 2.0                                         | 44        |
| Window Pro                          | 17        | C 2.0                                         | 44        |
| Window                              | 18        | M 2.0                                         | 45        |
| Glass                               | 19        | <b>2.3 Accessories for Polyurethane Foams</b> | <b>45</b> |
| Sitol® Deck Caulking S              | 19        | Cleaner for Polyurethane Foams                | 45        |
| Neutral <sup>life</sup>             | 20        | <b>03 WATERPROOFING</b>                       | <b>48</b> |
| Acetic Professional                 | 20        | <b>3.1 Primers for Waterproofers</b>          | <b>49</b> |
| Acetic Standard                     | 21        | Primer Aquatech                               | 49        |
| Acetic Fast                         | 21        | Flex PU Primer                                | 49        |
| Acetic Extra                        | 22        | Flex PU Primer 2K                             | 50        |
| Heat Resistant                      | 22        | <b>3.2 Cementitious Waterproofers</b>         | <b>50</b> |
| AC 2.0                              | 23        | Flexistar                                     | 50        |
| <b>1.3 Acrylic Sealants</b>         | <b>23</b> | Flexistar Rapid                               | 51        |
| Acrysil PRO                         | 23        | Flex 2K                                       | 51        |
| Acryl 15                            | 24        | Flex 1K                                       | 52        |
| Acryl 10                            | 24        | Aquaproof                                     | 52        |
| Acryl Fire Resistant                | 25        | Stop                                          | 53        |
| A 2.1                               | 25        | <b>3.3 Polymeric Waterproofers</b>            | <b>53</b> |
| AR 2.0                              | 26        | Promural Silicon                              | 53        |
| AF 2.0                              | 26        | Emulsione Epossidica 723                      | 54        |
| <b>1.4 Hybrid Products</b>          | <b>27</b> | Epoxy                                         | 54        |
| Hybrid LM                           | 27        | Aquatech                                      | 55        |
| Hybrid HM                           | 28        | Aquatech Rapid                                | 55        |
| Strong                              | 28        | <b>3.4 Polyurethane Waterproofers</b>         | <b>56</b> |
| Sitol® Marine                       | 29        | Flex PU 2K                                    | 56        |
| Sitol® Deck Caulking                | 29        | Flex PU Finish                                | 56        |
| Sitol® Deck Bonding                 | 30        | Flex PU Finish Base                           | 57        |
| HY 2.0                              | 30        | Flex PU                                       | 57        |
| <b>1.5 Polyurethane Sealants</b>    | <b>31</b> | <b>3.5 Bituminous waterproofers</b>           | <b>58</b> |
| Tack PU                             | 31        | Asfredol 1000                                 | 58        |
| PU HM Edilia                        | 31        | Asfredol 2000                                 | 58        |
| <b>1.6 Special Products</b>         | <b>32</b> | Sitol A                                       | 59        |
| Tack                                | 32        | Black Hydro Easy                              | 59        |
| Refractory                          | 32        | Black Hydro Light                             | 60        |
| Bitumen Seal                        | 33        | Black Hydro Pittura                           | 60        |
| Smooth                              | 33        | Black Hydro Poly 1K                           | 60        |
| <b>1.7 Accessories for Sealants</b> | <b>34</b> | Black Hydro Poly 2K                           | 61        |
| Synthetic Plugging Cord             | 34        | Black Hydro Spray                             | 61        |
| Nozzle for foil bags                | 34        | BW 100                                        | 62        |
| Cartridge Nozzles                   | 35        | BW 200                                        | 62        |
| <b>02 POLYURETHANE FOAMS</b>        | <b>38</b> | <b>3.6 Accessories for Waterproofing</b>      | <b>63</b> |
|                                     |           | PP Tape 120 mm - 50 m                         | 63        |

|                                                |           |                                                    |            |
|------------------------------------------------|-----------|----------------------------------------------------|------------|
| BU Tape                                        | 63        | Restauro Finitura                                  | 92         |
| Shower Tape 120 mm - 10 m                      | 64        | Rinnova                                            | 92         |
| Corner Tissue 90°                              | 64        | Umafix                                             | 93         |
| Corner Tissue 270°                             | 64        | Umatixo                                            | 93         |
| Floor Collar                                   | 65        | Umaflow                                            | 94         |
| Mat 1000 mm - 30 m                             | 65        | <b>6.3 Paints</b>                                  | <b>94</b>  |
| Band 140 mm                                    | 65        | Restauro Pittura                                   | 94         |
| Bridge Mat 1000 mm - 50 m                      | 66        | <b>07 ANCHORING AND MOUNTING</b>                   | <b>96</b>  |
| Safe Tape 40 mm - 10 m                         | 66        | <b>7.1 Chemical Anchors</b>                        | <b>97</b>  |
| Flex Pipe Collar 93 - 146                      | 66        | Xtreme Grip Vinylester                             | 97         |
| Flex Pipe Collar 50 - 75                       | 67        | CA Poly                                            | 97         |
| Flex Pipe Collar 22 - 37                       | 67        | <b>7.2 Epoxy Adhesives</b>                         | <b>98</b>  |
| Non Woven Tissue NT 50                         | 67        | Epox Ripresa                                       | 98         |
| Black Hydro Tex                                | 68        | <b>7.3 Cementitious Mortars</b>                    | <b>98</b>  |
| <b>04 FLOORING</b>                             | <b>70</b> | Flash                                              | 98         |
| Fast Screed                                    | 71        | Espansol Ancor                                     | 99         |
| Livellina 0-10                                 | 71        | <b>7.4 Accessories</b>                             | <b>99</b>  |
| Livellina 5-30                                 | 72        | Chemical Anchor Cage                               | 99         |
| Livellina HS                                   | 72        | Window frame screw for aluminium                   | 100        |
| Multimix Evo                                   | 73        | Window frame screw for PVC and wood                | 101        |
| Floorrep                                       | 73        | Chemical Anchor Mixer                              | 102        |
| Quarz                                          | 73        | <b>08 RESTORATION</b>                              | <b>104</b> |
| <b>05 TILES AND NATURAL STONE INSTALLATION</b> | <b>76</b> | <b>8.1 Surface Preparation</b>                     | <b>105</b> |
| <b>5.1 Primers and Detergents</b>              | <b>77</b> | Rinzaffo                                           | 105        |
| Multigrip                                      | 77        | Shield                                             | 105        |
| Tile Primer                                    | 77        | Deep Cleaner                                       | 106        |
| Flex                                           | 78        | Antisale                                           | 106        |
| Tile Cleaner                                   | 78        | <b>8.2 Cementitious Dehumidification Mortars</b>   | <b>107</b> |
| Tile Epoxy Cleaner                             | 78        | Risan One                                          | 107        |
| <b>5.2 Tile Adhesives</b>                      | <b>79</b> | Intonaco WTA                                       | 107        |
| Tile 2020                                      | 79        | DP 501                                             | 108        |
| Tile 900                                       | 79        | <b>8.3 Dehumidification Finishing Mortars</b>      | <b>108</b> |
| Tile 700                                       | 80        | Finitura                                           | 108        |
| Tile 600                                       | 80        | Finissimo                                          | 109        |
| Tile 480                                       | 81        | <b>8.4 Renovation with Calcium Silicate Panels</b> | <b>109</b> |
| Tile 350                                       | 81        | Bond & Finish                                      | 109        |
| Tile 250                                       | 82        | Panel <sup>life</sup>                              | 110        |
| T 480                                          | 82        | <b>8.5 Finishing Mortars for Facades and Walls</b> | <b>110</b> |
| T 250                                          | 83        | R.E.D.                                             | 110        |
| T 50                                           | 83        | Multifinish                                        | 111        |
| <b>5.3 Tile Grouts</b>                         | <b>84</b> | Stuccosol                                          | 111        |
| Tile Grout 5-15 mm                             | 84        | GP 100                                             | 112        |
| Tile Epoxy                                     | 84        | <b>09 THERMAL INSULATION</b>                       | <b>114</b> |
| Tile Grout 2-15 mm                             | 85        | <b>9.1 Adhesives</b>                               | <b>115</b> |
| Tile Grout ≤8 mm                               | 86        | Mastofix® Light                                    | 115        |
| <b>06 CONCRETE RESTORATION</b>                 | <b>88</b> | Ekomix                                             | 115        |
| <b>6.1 Pretreatments</b>                       | <b>89</b> | Ekomix Plus                                        | 116        |
| Restauro Ferri                                 | 89        | <b>9.2 Insulation Panels</b>                       | <b>116</b> |
| <b>6.2 Cementitious Mortars</b>                | <b>89</b> | eTics White Recycled                               | 116        |
| Restauro R4                                    | 89        | eTics Green Start                                  | 117        |
| Restauro R3                                    | 90        | eTics Black All Season                             | 118        |
| Restauro R2                                    | 90        |                                                    |            |
| Strutturale                                    | 91        |                                                    |            |
| Colabile                                       | 91        |                                                    |            |

|                                                   |            |                                               |            |
|---------------------------------------------------|------------|-----------------------------------------------|------------|
| Ekomix Panel EPS White                            | 119        | Butyl tape grey                               | 140        |
| Ekomix Panel EPS Grey                             | 120        | PCV tape                                      | 140        |
| Ekomix Panel Base                                 | 121        | PE tape                                       | 140        |
| Ekomix Panel Wool - P                             | 122        | Butyl tape with alufoil                       | 141        |
| <b>9.3 Mechanical mounting</b>                    | <b>122</b> | EPDM membrane with butyl                      | 141        |
| eTics Twister                                     | 122        | Insulation membrane ISO Inside                | 142        |
| eTics Twister installation tool                   | 123        | Insulation membrane ISO Outside               | 142        |
| Termoz CS II                                      | 123        | <b>9.6 Installation items</b>                 | <b>143</b> |
| Termoz 6H                                         | 124        | Varir 120x160                                 | 143        |
| Washer MW60                                       | 124        | Variz 90                                      | 143        |
| Washer PS60                                       | 125        | Milling tool rod                              | 144        |
| eTics Screw-in dowel installation kit             | 125        | Milling tool plate                            | 144        |
| Termoz CN 8                                       | 126        | Electric box E-LINE                           | 145        |
| Masonry drill bit SDS Plus II                     | 126        | TRA WIK PU                                    | 145        |
| <b>9.4 Accessories and System Components</b>      | <b>127</b> | K1-PE                                         | 146        |
| Rete SSA                                          | 127        | UMP ALU TR                                    | 146        |
| Reveal corner angle for windows                   | 127        | <b>10 PAINTS AND COATINGS</b>                 | <b>148</b> |
| PVC mesh corner bead                              | 128        | <b>10.1 Primers for Coatings and Paints</b>   | <b>149</b> |
| Corner bead roll                                  | 128        | Primer VIP                                    | 149        |
| Drip edge profile                                 | 128        | Consolida                                     | 149        |
| Sheet metal connection profile                    | 129        | <b>10.2 Coatings</b>                          | <b>150</b> |
| Plaster stop profile                              | 129        | Skin Acryl                                    | 150        |
| Movement joint profile                            | 129        | Skin Siloxan                                  | 151        |
| Expansion joint profile E-shape                   | 130        | Skin Acriloxan                                | 152        |
| Expansion joint profile V-shape                   | 130        | <b>10.3 Paints</b>                            | <b>153</b> |
| Movement joint profile horizontal Profi PU        | 130        | Finish Siloxan                                | 153        |
| Standard window connection profile                | 131        | Finish Acryl                                  | 153        |
| Window connection profile 3D-PRO                  | 131        | Finish Acriloxan                              | 154        |
| Window reveal element Lai-Sys                     | 132        | <b>11 ADDITIVES</b>                           | <b>156</b> |
| Window lintel element Lai-Sys                     | 133        | Neoplast Grip                                 | 157        |
| Connector profile type U                          | 133        | Neoplast Latex                                | 157        |
| Connector profile type U-AL                       | 134        | <b>12 TOOLS</b>                               | <b>160</b> |
| Fixing pins                                       | 134        | Multipurpose gun                              | 161        |
| Rustication mesh                                  | 135        | Manual Cartridge Gun                          | 161        |
| Rustication mesh for external corners             | 135        | Gun Xtreme 300 PRO                            | 162        |
| Aluminium base starter profile                    | 136        | Gun Xtreme 400 PRO                            | 162        |
| Clip on profile                                   | 136        | Polyurethane Foam Gun T500                    | 162        |
| PVC basic baseboard profile                       | 137        | Polyurethane Foam Gun T2000                   | 163        |
| PVC baseboard profile                             | 137        | PVC chopping board with rubber handle 280x130 | 163        |
| Net EKOR A150                                     | 138        | Notched trowel with wooden handle T12 480x130 | 163        |
| <b>9.5 Components for Air and Water Tightness</b> | <b>138</b> | Notched trowel with wooden handle T16 480x130 | 164        |
| Self-expanding joint sealing tape EXP             | 138        | Trowel for rustication mesh                   | 164        |
| Self-expanding joint sealing tape EXP BG2         | 139        |                                               |            |
| Self-expanding joint sealing tape EXP Multi       | 139        |                                               |            |

## PRODUCT INDEX IN ALPHABETICAL ORDER

### A

|     |                                |
|-----|--------------------------------|
| 25  | A 2.1                          |
| 23  | AC 2.0                         |
| 26  | AF 2.0                         |
| 26  | AR 2.0                         |
| 22  | Acetic Extra                   |
| 21  | Acetic Fast                    |
| 20  | Acetic Professional            |
| 21  | Acetic Standard                |
| 24  | Acryl 10                       |
| 24  | Acryl 15                       |
| 25  | Acryl Fire Resistant           |
| 23  | Acrysil PRO                    |
| 136 | Aluminium base starter profile |
| 106 | Antisale                       |
| 52  | Aquaproof                      |
| 55  | Aquatech                       |
| 55  | Aquatech Rapid                 |
| 58  | Asfredol 1000                  |
| 58  | Asfredol 2000                  |

### B

|     |                           |
|-----|---------------------------|
| 63  | BU Tape                   |
| 62  | BW 100                    |
| 62  | BW 200                    |
| 65  | Band 140 mm               |
| 33  | Bitumen Seal              |
| 59  | Black Hydro Easy          |
| 60  | Black Hydro Light         |
| 60  | Black Hydro Pittura       |
| 60  | Black Hydro Poly 1K       |
| 61  | Black Hydro Poly 2K       |
| 61  | Black Hydro Spray         |
| 68  | Black Hydro Tex           |
| 109 | Bond & Finish             |
| 66  | Bridge Mat 1000 mm - 50 m |
| 140 | Butyl tape grey           |
| 141 | Butyl tape with alufoil   |

### C

|     |                                |
|-----|--------------------------------|
| 44  | C 2.0                          |
| 97  | CA Poly                        |
| 35  | Cartridge Nozzles              |
| 99  | Chemical Anchor Cage           |
| 102 | Chemical Anchor Mixer          |
| 45  | Cleaner for Polyurethane Foams |
| 136 | Clip on profile                |
| 91  | Colabile                       |
| 133 | Connector profile type U       |
| 134 | Connector profile type U-AL    |
| 149 | Consolida                      |
| 42  | Coppi                          |
| 40  | Coppi Merano                   |
| 64  | Corner Tissue 270°             |
| 64  | Corner Tissue 90°              |

|     |                  |
|-----|------------------|
| 128 | Corner bead roll |
|-----|------------------|

### D

|     |                   |
|-----|-------------------|
| 108 | DP 501            |
| 106 | Deep Cleaner      |
| 13  | Domus             |
| 128 | Drip edge profile |

### E

|     |                                 |
|-----|---------------------------------|
| 141 | EPDM membrane with butyl        |
| 115 | Ekomix                          |
| 121 | Ekomix Panel Base               |
| 120 | Ekomix Panel EPS Grey           |
| 119 | Ekomix Panel EPS White          |
| 122 | Ekomix Panel Wool - P           |
| 116 | Ekomix Plus                     |
| 145 | Electric box E-LINE             |
| 54  | Emulsione Epossidica 723        |
| 98  | Epox Ripresa                    |
| 54  | Epoxy                           |
| 99  | Espansol Ancor                  |
| 130 | Expansion joint profile E-shape |
| 130 | Expansion joint profile V-shape |

### F

|     |                                     |
|-----|-------------------------------------|
| 44  | F 2.0                               |
| 71  | Fast Screed                         |
| 154 | Finish Acriloxan                    |
| 153 | Finish Acryl                        |
| 153 | Finish Siloxan                      |
| 109 | Finissimo                           |
| 108 | Finitura                            |
| 15  | Fire Resistant (Sealants)           |
| 43  | Fire Resistant (Polyurethane Foams) |
| 134 | Fixing pins                         |
| 98  | Flash                               |
| 78  | Flex                                |
| 52  | Flex 1K                             |
| 51  | Flex 2K                             |
| 42  | Flex 365                            |
| 57  | Flex PU                             |
| 56  | Flex PU 2K                          |
| 56  | Flex PU Finish                      |
| 57  | Flex PU Finish Base                 |
| 49  | Flex PU Primer                      |
| 50  | Flex PU Primer 2K                   |
| 67  | Flex Pipe Collar 22 - 37            |
| 67  | Flex Pipe Collar 50 - 75            |
| 66  | Flex Pipe Collar 93 - 146           |
| 50  | Flexistar                           |
| 51  | Flexistar Rapid                     |
| 16  | Floor                               |
| 65  | Floor Collar                        |
| 73  | Floorrep                            |

**G**

- 112 GP 100
- 19 Glass
- 162 Gun Xtreme 300 PRO
- 162 Gun Xtreme 400 PRO

**H**

- 30 HY 2.0
- 22 Heat Resistant
- 39 High Tack
- 28 Hybrid HM
- 27 Hybrid LM
- 40 Hydro

**I**

- 142 Insulation membrane ISO Inside
- 142 Insulation membrane ISO Outside
- 107 Intonaco WTA

**K**

- 146 K1-PE

**L**

- 12 Lamiera
- 71 Livellina 0-10
- 72 Livellina 5-30
- 72 Livellina HS
- 15 Low Modulus

**M**

- 45 M 2.0
- 161 Manual Cartridge Gun
- 14 Marble & Stone
- 126 Masonry drill bit SDS Plus II
- 115 Mastofix® Light
- 65 Mat 1000 mm - 30 m
- 144 Milling tool plate
- 144 Milling tool rod
- 129 Movement joint profile
- 130 Movement joint profile horizontal Profi PU
- 111 Multifinish
- 77 Multigrip
- 73 Multimix Evo
- 161 Multipurpose gun
- 43 Multiuso

**N**

- 157 Neoplast Grip
- 157 Neoplast Latex
- 138 Net EKOR A150
- 14 Neutral
- 20 Neutral<sup>life</sup>
- 67 Non Woven Tissue NT 50
- 163 Notched trowel with wooden handle T12 480x130
- 164 Notched trowel with wooden handle T16 480x130
- 34 Nozzle for foil bags

**P**

- 140 PCV tape
- 140 PE tape
- 63 PP Tape 120 mm - 50 m
- 31 PU HM Edilia
- 137 PVC baseboard profile
- 137 PVC basic baseboard profile
- 163 PVC chopping board with rubber handle 280x130
- 128 PVC mesh corner bead
- 110 Panel<sup>life</sup>
- 39 Panel F
- 129 Plaster stop profile
- 16 Polycarbonate
- 163 Polyurethane Foam Gun T2000
- 162 Polyurethane Foam Gun T500
- 49 Primer Aquatech
- 11 Primer Silicone
- 149 Primer VIP
- 53 Promural Silicon

**Q**

- 73 Quarz

**R**

- 110 R.E.D.
- 32 Refractory
- 89 Restauro Ferri
- 92 Restauro Finitura
- 94 Restauro Pittura
- 90 Restauro R2
- 90 Restauro R3
- 89 Restauro R4
- 127 Rete SSA
- 127 Reveal corner angle for windows
- 92 Rinnova
- 105 Rinzafo
- 107 Risan One
- 135 Rustication mesh
- 135 Rustication mesh for external corners

**S**

- 66 Safe Tape 40 mm - 10 m
- 138 Self-expanding joint sealing tape EXP
- 139 Self-expanding joint sealing tape EXP BG2
- 139 Self-expanding joint sealing tape EXP Multi
- 129 Sheet metal connection profile
- 105 Shield
- 64 Shower Tape 120 mm - 10 m
- 59 Sitol A
- 30 Sitol® Deck Bonding
- 29 Sitol® Deck Caulking
- 19 Sitol® Deck Caulking S
- 29 Sitol® Marine
- 11 Sitol® Primer Deck Caulking
- 152 Skin Acriloxan
- 150 Skin Acryl
- 151 Skin Siloxan
- 33 Smooth
- 131 Standard window connection profile
- 53 Stop

- 28** Strong
- 91** Strutturale
- 111** Stuccosol
- 34** Synthetic Plugging Cord

## T

---

- 83** T 250
- 82** T 480
- 83** T 50
- 145** TRA WIK PU
- 32** Tack
- 31** Tack PU
- 124** Termoz 6H
- 126** Termoz CN 8
- 123** Termoz CS II
- 79** Tile 2020
- 82** Tile 250
- 81** Tile 350
- 81** Tile 480
- 80** Tile 600
- 80** Tile 700
- 79** Tile 900
- 78** Tile Cleaner
- 84** Tile Epoxy
- 78** Tile Epoxy Cleaner
- 85** Tile Grout 2-15 mm
- 84** Tile Grout 5-15 mm
- 86** Tile Grout ≤8 mm
- 77** Tile Primer
- 164** Trowel for rustication mesh

## U

---

- 146** UMP ALU TR
- 93** Umafix
- 94** Umaflow
- 93** Umatixo

## V

---

- 143** Varir 120x160
- 143** Variz 90
- 41** Volt

## W

---

- 124** Washer MW60
- 125** Washer PS60
- 18** Window
- 41** Window & Door
- 17** Window Pro
- 131** Window connection profile 3D-PRO
- 101** Window frame screw for PVC and wood
- 100** Window frame screw for aluminium
- 133** Window lintel element Lai-Sys
- 132** Window reveal element Lai-Sys

## X

---

- 97** Xtreme Grip Vinylester

## E

---

- 118** eTics Black All Season
- 117** eTics Green Start
- 125** eTics Screw-in dowel installation kit
- 122** eTics Twister
- 123** eTics Twister installation tool
- 116** eTics White Recycled



# 1. Sealants

- 1.1 Primers for Silicones
- 1.2 Silicone Sealants
- 1.3 Acrylic Sealants
- 1.4 Hybrid Products
- 1.5 Polyurethane Sealants
- 1.6 Special Products
- 1.7 Accessories for Sealants



## 1.1 PRIMERS FOR SILICONES

### SITOL<sup>®</sup> PRIMER DECK CAULKING

Primer for sealants on wooden and porous substrates.

- Protection of teak wood
- Improving adhesion on wood substrates
- Pre-treatment of teak deck components



| Code | Packaging size |
|------|----------------|
| 5664 | 10x0.5 l       |



### PRIMER SILICONE

Pre-spreading for silicone sealants, siloxane resin in solvent-based, for priming the sides of joints subject to high stress and/or where adhesion may be difficult.

Consumption on smooth, non-absorbent surfaces: 20 g/m<sup>2</sup> Consumption on porous absorbent surfaces: 50-300 g/m<sup>2</sup>



| Code | Color                                                                                           | Packaging    | Packaging size |
|------|-------------------------------------------------------------------------------------------------|--------------|----------------|
| 6352 |  Transparent | metal bucket | 0,5 l          |



## 1.2 SILICONE SEALANTS

### LAMIERA

Neutral curing silicone sealant specifically for tin roofing works.

- High sealing properties
- Permanent elasticity
- Excellent resistance to aging
- 5 colours

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color |                         | Packaging | Packaging size | Pallet        |                   |
|------|-------|-------------------------|-----------|----------------|---------------|-------------------|
| 5259 |       | 102 White RAL 9010      | cartridge | 24x310 ml      | 64 cardboards | <br>8030334052590 |
| 5343 |       | 130 Ivory               | cartridge | 24x310 ml      | 64 cardboards | <br>8030334053436 |
| 6168 |       | 203 Sand grey           | cartridge | 24x310 ml      | 64 cardboards | <br>8030334061684 |
| 5299 |       | 235 Aluminium           | cartridge | 24x310 ml      | 64 cardboards | <br>8030334052996 |
| 6165 |       | 237 Grey                | cartridge | 24x310 ml      | 64 cardboards | <br>8030334061653 |
| 5277 |       | 280 Anthracite RAL 7016 | cartridge | 24x310 ml      | 64 cardboards | <br>8030334052774 |
| 6166 |       | 374 Copper              | cartridge | 24x310 ml      | 64 cardboards | <br>8030334061660 |
| 6167 |       | 395 Dark brown          | cartridge | 24x310 ml      | 64 cardboards | <br>8030334061677 |
| 5154 |       | 460 Sienared            | cartridge | 24x310 ml      | 64 cardboards | <br>8030334051548 |

## DOMUS

Neutral curing silicone sealant with anti-mould agent and low modulus of elasticity

- UV-resistant
- Suitable for wooden finishes and furniture
- For indoor and outdoor use
- Colour matching with cementitious Tile Grout
- Stain-resistant: suitable for installation of mirrors
- MEKO FREE formulation

Consumption per linear metre Joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                   | Packaging | Packaging size | Pallet         |                   |
|------|-------------------------|-----------|----------------|----------------|-------------------|
| 5603 | 020 Transparent         | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056031 |
| 5606 | 102 White RAL 9010      | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056062 |
| 5607 | 103 White RAL 9016      | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056079 |
| 5617 | 150 Jasmin              | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056178 |
| 5605 | 140 Ivory RAL 1013      | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056055 |
| 5618 | 200 Manhattan           | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056185 |
| 5616 | 205 Pearl grey          | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056161 |
| 5608 | 210 Bright grey         | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056086 |
| 5614 | 230 Grey                | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056147 |
| 5615 | 250 Metallic grey       | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056154 |
| 5604 | 280 Anthracite RAL 7016 | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056048 |
| 5609 | 291 Black RAL 9005      | cartridge | 24x310 ml      | 64 cardboards  | <br>8030334056093 |
| 5623 | 310 Vanilla             | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056239 |
| 5610 | 320 Bahama              | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056109 |
| 5611 | 330 Beige               | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056116 |
| 5620 | 340 Hazel nut           | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056208 |
| 5619 | 350 Brown               | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056192 |
| 5613 | 360 Chocolate           | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056130 |
| 5622 | 370 Terracotta          | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056222 |
| 5621 | 376 Walnut              | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056215 |
| 5612 | 380 Chestnut            | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056123 |
| 5624 | 550 Green RAL 6005      | cartridge | 12x310 ml      | 116 cardboards | <br>8030334056246 |

## MARBLE & STONE

Neutral curing silicone sealant with low modulus of elasticity for marble and natural stone.

- No stains
- High UV resistance
- Colour matching with cement joints Tile grout
- Anti-mould agent
- Certified for the installation of windows and doors
- MEKO FREE formulation

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color           | Packaging | Packaging size | Pallet         |
|------|-----------------|-----------|----------------|----------------|
| 5602 | 020 Transparent | cartridge | 12x310 ml      | 116 cardboards |
| 5599 | 100 White       | cartridge | 12x310 ml      | 116 cardboards |
| 5600 | 220 Cement grey | cartridge | 12x310 ml      | 116 cardboards |
| 5598 | 260 Anthracite  | cartridge | 12x310 ml      | 116 cardboards |
| 5601 | 377 Walnut      | cartridge | 12x310 ml      | 116 cardboards |



## NEUTRAL

Transparent, neutral-curing silicone sealant for corner joints and glass.

- Excellent resistance to aging and UV rays
- Long-lasting seal

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color           | Packaging | Packaging size | Pallet        |
|------|-----------------|-----------|----------------|---------------|
| 6188 | 020 Transparent | cartridge | 24x310 ml      | 64 cardboards |
| 6523 | 020 Transparent | foil bag  | 20x600 ml      | 36 cardboards |
| 6651 | 020 Transparent | drum      | 20 l           | -             |



## LOW MODULUS

Neutral cured silicone sealant.

- Suitable for construction, civil engineering and prefabricated elements
- High UV resistance
- High adhesion
- 30 years proven efficiency

Consumption per linear metre Joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1

Linear metres made from one bag: 6



| Code | Color       | Packaging | Packaging size | Pallet        |
|------|-------------|-----------|----------------|---------------|
| 6460 | 105 White   | cartridge | 24x310 ml      | 64 cardboards |
| 6163 | 215 Grey C1 | cartridge | 24x310 ml      | 64 cardboards |
| 6521 | 215 Grey C1 | foil bag  | 20x600 ml      | 36 cardboards |
| 6151 | 233 Grey    | cartridge | 24x310 ml      | 64 cardboards |
| 6153 | 290 Black   | cartridge | 24x310 ml      | 64 cardboards |



## FIRE RESISTANT

Neutral silicone sealant with high fire resistance.

- High adhesion
- High resistance to UV rays
- Low elastic modulus
- Suitable for applications subject to fire regulations up to EI 240

Consumption per linear metre joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1



| Code | Color    | Packaging | Packaging size | Pallet        |
|------|----------|-----------|----------------|---------------|
| 6766 | 237 Grey | cartridge | 24x310 ml      | 64 cardboards |



## FLOOR

Neutral curing silicone sealant for floor applications.

- High resistance to UV rays
- High resistance to traffic
- Colours: grey

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                                                                                      | Packaging | Packaging size | Pallet        |
|------|--------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 6183 |  237 Grey | cartridge | 24x310 ml      | 64 cardboards |



## POLYCARBONATE

Neutral cured silicone sealant for polycarbonate elements.

- Good adhesion
- High elasticity
- Resistant to UV rays
- Colour: transparent

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                                                                                               | Packaging | Packaging size | Pallet        |
|------|-----------------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 6177 |  020 Transparent | cartridge | 24x310 ml      | 64 cardboards |



## WINDOW PRO

Neutral curing silicone sealant with low modulus of elasticity for sealing double-glazing and coupled windows.

- In compliance with UNI 11673
- Suitable for double glazing
- Anti-mould agent
- UV-resistant
- For indoor and outdoor use

Consumption per linear metre Joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color              | Packaging | Packaging size | Pallet         |               |
|------|--------------------|-----------|----------------|----------------|---------------|
| 5637 | 020 Transparent    | cartridge | 24x310 ml      | 64 cardboards  | 8030334056376 |
| 5638 | 020 Transparent    | foil bag  | 20x400 ml      | 36 cardboards  | 8030334056383 |
| 5639 | 020 Transparent    | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056390 |
| 5642 | 102 White RAL 9010 | cartridge | 24x310 ml      | 64 cardboards  | 8030334056420 |
| 5649 | 102 White RAL 9010 | foil bag  | 20x400 ml      | 36 cardboards  | 8030334056499 |
| 5652 | 102 White RAL 9010 | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056529 |
| 5643 | 103 White RAL 9016 | cartridge | 24x310 ml      | 64 cardboards  | 8030334056437 |
| 5653 | 103 White RAL 9016 | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056536 |
| 5641 | 140 Ivory RAL 1013 | cartridge | 24x310 ml      | 64 cardboards  | 8030334056413 |
| 5651 | 140 Ivory RAL 1013 | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056512 |
| 5645 | 236 Grey RAL 7004  | cartridge | 24x310 ml      | 64 cardboards  | 8030334056451 |
| 5654 | 236 Grey RAL 7004  | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056543 |
| 5634 | 250 Metallic grey  | cartridge | 12x310 ml      | 116 cardboards | 8030334056345 |
| 5646 | 291 Black RAL 9005 | cartridge | 24x310 ml      | 64 cardboards  | 8030334056468 |
| 5655 | 291 Black RAL 9005 | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056550 |
| 5635 | 376 Walnut         | cartridge | 12x310 ml      | 116 cardboards | 8030334056352 |
| 5647 | 390 Dark brown     | cartridge | 24x310 ml      | 64 cardboards  | 8030334056475 |
| 5640 | Anthracite         | cartridge | 24x310 ml      | 64 cardboards  | 8030334056406 |
| 5648 | Anthracite         | foil bag  | 20x400 ml      | 36 cardboards  | 8030334056482 |
| 5650 | Anthracite         | foil bag  | 20x600 ml      | 36 cardboards  | 8030334056505 |
| 5636 | 550 Green RAL 6005 | cartridge | 12x310 ml      | 116 cardboards | 8030334056369 |

## WINDOW

Neutral curing single-component silicone sealant for the installation and sealing of connection and expansion joints between frames and walls.

- In compliance with UNI 11673
- UV-resistant
- For interior and outdoor use
- Anti-mould agent
- MEKO FREE formulation

Consumption per linear metre Joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                   | Packaging | Packaging size | Pallet        |                   |
|------|-------------------------|-----------|----------------|---------------|-------------------|
| 5625 | 020 Transparent         | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056253 |
| 5626 | 020 Transparent         | foil bag  | 20x600 ml      | 36 cardboards | <br>8030334056260 |
| 5627 | 102 White RAL 9010      | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056277 |
| 5632 | 102 White RAL 9010      | foil bag  | 20x600 ml      | 36 cardboards | <br>8030334056321 |
| 5628 | 103 White RAL 9016      | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056284 |
| 5631 | 140 Ivory RAL 1013      | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056314 |
| 5630 | 280 Anthracite RAL 7016 | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056307 |
| 5629 | 291 Black RAL 9005      | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056291 |
| 5644 | 210 Bright grey         | cartridge | 24x310 ml      | 64 cardboards | <br>8030334056444 |

## GLASS

Silicone sealant with very low modulus of elasticity for weather sealing an rear-ventilated facades.

- Suitable for sealing glass joints on façades
- Formulated for weather sealing and rear-ventilated joints
- High UV resistance
- Perfect adhesion
- 30 years of tested efficiency


Consumption per linear metre Joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1

Linear metres made from one bag: 6



| Code | Color     | Packaging | Packaging size | Pallet        |
|------|-----------|-----------|----------------|---------------|
| 5594 | Grey      | cartridge | 24x310 ml      | 64 cardboards |
| 5595 | 290 Black | cartridge | 24x310 ml      | 64 cardboards |
| 5596 | Grey      | foil bag  | 20x600 ml      | 36 cardboards |
| 5597 | 290 Black | foil bag  | 20x600 ml      | 36 cardboards |



## SITOL® DECK CAULKING S

Sandable silicone sealant for teak caulking.

- Excellent UV and ageing resistance, long-term resistance to contact with fresh and salt water
- High chemical resistance
- Excellent workability
- Sandable after curing

Consumption per linear metre Joint section 5 x 5 mm: 50 ml



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 5660 | Grey  | cartridge | 24x290 ml      | 64 cardboards |
| 5661 | Grey  | foil bag  | 20x600 ml      | 36 cardboards |



## NEUTRAL LIFE

Fossil-free neutral silicone sealant with low modulus of elasticity, mould resistant.

- Eco-friendly formulation
- Certification according to the criteria of ecological sustainability
- Very low emission of volatile organic compounds
- Waterproof and UV resistant, for indoor and outdoor applications

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color       | Packaging | Packaging size | Pallet        |
|------|-------------|-----------|----------------|---------------|
| 8182 | Transparent | cartridge | 24x310 ml      | 60 cardboards |
| 8183 | White       | cartridge | 24x310 ml      | 60 cardboards |
| 8184 | Grey        | cartridge | 24x310 ml      | 60 cardboards |



## ACETIC PROFESSIONAL

Acetic curing silicone sealant, resistant to moulds for door and window frames and sanitary use.

- Resistant to UV-rays
- High resistance to aging
- 4 colours

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color           | Packaging | Packaging size | Pallet        |
|------|-----------------|-----------|----------------|---------------|
| 8118 | 000 Transparent | cartridge | 24x310 ml      | 64 cardboards |
| 8117 | 100 White       | cartridge | 24x310 ml      | 64 cardboards |



## ACETIC STANDARD


Acetic curing silicone sealant with anti-mould agent for sanitary use and facades.

- Fast curing
- High adhesion
- High resistant to UV-rays
- 6 colours

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 2,8



| Code | Color           | Packaging | Packaging size | Pallet        |
|------|-----------------|-----------|----------------|---------------|
| 8001 | 000 Transparent | cartridge | 24x280 ml      | 64 cardboards |
| 8003 | 100 White       | cartridge | 24x280 ml      | 64 cardboards |
| 8103 | 200 Manhattan   | cartridge | 24x280 ml      | 64 cardboards |
| 8104 | 205 Pearl grey  | cartridge | 24x280 ml      | 64 cardboards |
| 8106 | 230 Grey        | cartridge | 24x280 ml      | 64 cardboards |
| 8107 | 260 Anthracite  | cartridge | 24x280 ml      | 64 cardboards |
| 8004 | 290 Black       | cartridge | 24x280 ml      | 64 cardboards |
| 8109 | 320 Bahama      | cartridge | 24x280 ml      | 64 cardboards |
| 8112 | 350 Brown       | cartridge | 24x280 ml      | 64 cardboards |

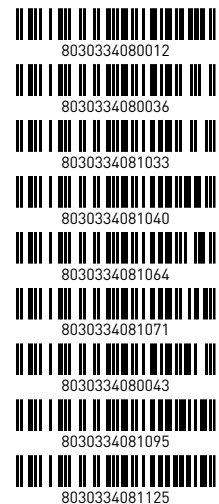

## ACETIC FAST

Silicone sealant with acetic curing, transparent, very fast hardening.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color           | Packaging | Packaging size | Pallet        |
|------|-----------------|-----------|----------------|---------------|
| 5475 | 000 Transparent | cartridge | 24x310 ml      | 64 cardboards |



## ACETIC EXTRA

Transparent acetic curing silicone sealant with improved mechanical properties.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                                                                                             | Packaging | Packaging size | Pallet        |
|------|---------------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 6541 |  000 Transparent | cartridge | 24x310 ml      | 64 cardboards |



## HEAT RESISTANT

Acetic silicone sealant for temperatures up to 300 °C.

- High resistance to heat
- Resistance to aging
- UV ray resistance
- Colour: red

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                                                                                       | Packaging | Packaging size | Pallet        |
|------|---------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 6185 |  450 Red | cartridge | 24x310 ml      | 64 cardboards |



**AC 2.0** *EKOR*

Single-component silicone sealant with acetic cross-linking for bonding and elastic sealing of expansion joints with a maximum working elongation of 25%. The hardening takes place by reaction with atmospheric humidity. Mould resistant formulation.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 2,8



| Code | Color           | Packaging | Packaging size | Pallet        |
|------|-----------------|-----------|----------------|---------------|
| 8030 | 000 Transparent | cartridge | 24x280 ml      | 64 cardboards |
| 8031 | 100 White       | cartridge | 24x280 ml      | 64 cardboards |

**1.3 ACRYLIC SEALANTS****ACRYSIL PRO**

Acrylic-silane sealant for sealing flexible joints.

- Good resistance to UV rays
- Paintable
- Operating elongation capacity of 15%

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1  
Linear metres made with a bag: 6



| Code | Color     | Packaging | Packaging size | Pallet        |
|------|-----------|-----------|----------------|---------------|
| 5544 | 101 White | cartridge | 24x310 ml      | 64 cardboards |
| 5545 | 230 Grey  | cartridge | 24x310 ml      | 64 cardboards |
| 5049 | 101 White | foil bag  | 20x600 ml      | 36 cardboards |
| 5138 | 230 Grey  | foil bag  | 20x600 ml      | 36 cardboards |



## ACRYL 15

High-performance paintable acrylic sealant for elastic sealing of connection joints.

- **Paintable**
- **Adheres also to damp surfaces**
- **Colours: ivory, white, grey**

Consumption per linear metre joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1

Linear metres made with a bag: 6



| Code | Color     | Packaging | Packaging size | Pallet        |
|------|-----------|-----------|----------------|---------------|
| 6335 | 101 White | cartridge | 24x310 ml      | 64 cardboards |
| 6332 | 230 Grey  | cartridge | 24x310 ml      | 64 cardboards |
| 6542 | 101 White | foil bag  | 20x600 ml      | 36 cardboards |
| 6530 | 230 Grey  | foil bag  | 20x600 ml      | 36 cardboards |



## ACRYL 10

Paintable acrylic sealant for elastic sealing of connection joints.

- **High adhesive strength**
- **Paintable**
- **Colours: white, grey**

Consumption per linear metre joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1



| Code | Color     | Packaging | Packaging size | Pallet        |
|------|-----------|-----------|----------------|---------------|
| 6580 | 101 White | cartridge | 24x310 ml      | 64 cardboards |
| 6578 | 230 Grey  | cartridge | 24x310 ml      | 64 cardboards |



## ACRYL FIRE RESISTANT

Acrylic sealant for applications subject to fire regulations up to EI 240.

- Prevents smoke and flames from entering emergency areas
- Certified for ceiling applications
- High resistance to ageing
- Paintable

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 6



| Code | Color     | Packaging | Packaging size | Pallet        |
|------|-----------|-----------|----------------|---------------|
| 5515 | 101 White | foil bag  | 20x600 ml      | 36 cardboards |
| 5516 | 230 Grey  | foil bag  | 20x600 ml      | 36 cardboards |




### A 2.1 EKOR

Single-component acrylic-based elasto-plastic sealant in aqueous dispersion for overpaintable sealing of cracks, fissures and expansion joints between façade elements with a maximum working elongation of 12%.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1  
Linear metres made with a bag: 5,5



| Code | Color     | Packaging | Packaging size | Pallet        |
|------|-----------|-----------|----------------|---------------|
| 5130 | 100 White | cartridge | 24x310 ml      | 64 cardboards |
| 6536 | 100 White | foil bag  | 20x600 ml      | 36 cardboards |
| 6535 | 230 Grey  | foil bag  | 20x600 ml      | 36 cardboards |



**AR 2.0** EKOR

Single-component, elastic, acrylic-based sealant in aqueous dispersion, workable with trowel, for overpaintable sealing of cracks and fissures where a rough material appearance similar in grain to civil finishes is required.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                                                                                       | Packaging | Packaging size | Pallet        |
|------|---------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 8028 |  101 White | cartridge | 24x310 ml      | 60 cardboards |

**AF 2.0** EKOR

Single-component acrylic-based elasto-plastic sealant in aqueous dispersion for overpaintable sealing of cracks, fissures and connection joints between façade elements with a maximum working elongation of 7.5%.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 3,1



| Code | Color                                                                                         | Packaging | Packaging size | Pallet        |
|------|-----------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 8029 |  101 White | cartridge | 24x310 ml      | 60 cardboards |



## 1.4 HYBRID PRODUCTS

### HYBRID LM

Low modulus of elasticity sealant, based on hybrid polymers, for façades and windows.

- Good UV resistance
- Low modulus of elasticity
- Paintable
- Indoor and outdoor use, even on damp substrates
- Suitable for certified installation of windows and doors according to UNI 11673-1

Consumption per linear metre joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 2,9



| Code | Color              | Packaging | Packaging size | Pallet         |               |
|------|--------------------|-----------|----------------|----------------|---------------|
| 5498 | 290 Black          | cartridge | 12x290 ml      | 116 cardboards | 8030334054983 |
| 5499 | 375 hazel          | cartridge | 12x290 ml      | 116 cardboards | 8030334054990 |
| 5490 | 103 White RAL 9016 | cartridge | 12x290 ml      | 116 cardboards | 8030334054907 |
| 5491 | 236 Grey RAL 7004  | cartridge | 12x290 ml      | 116 cardboards | 8030334054914 |
| 5507 | 103 White RAL 9016 | foil bag  | 20x400 ml      | 72 cardboards  | 8030334055072 |
| 5508 | 236 Grey RAL 7004  | foil bag  | 20x400 ml      | 72 cardboards  | 8030334055089 |
| 5509 | 103 White RAL 9016 | foil bag  | 20x600 ml      | 36 cardboards  | 8030334055096 |
| 5510 | 236 Grey RAL 7004  | foil bag  | 20x600 ml      | 36 cardboards  | 8030334055102 |

## HYBRID HM

Single-component, hybrid polymer-based adhesive-sealant with anti mould agent for overpaintable elastic bonding and sealing of joints in construction and industry in general.

- Overpaintable
- Suitable for indoor and outdoor use, also on moist substrates
- Ideal for both construction and industry
- Very low emissions of Volatile Organic Compounds



| Code | Color              | Packaging | Packaging size | Pallet         |  |
|------|--------------------|-----------|----------------|----------------|--|
| 5665 | 103 White RAL 9016 | cartridge | 12x290 ml      | 116 cardboards |  |
| 5666 | 236 Grey RAL 7004  | cartridge | 12x290 ml      | 116 cardboards |  |
| 5667 | 290 Black          | cartridge | 12x290 ml      | 116 cardboards |  |
| 5513 | 103 White RAL 9016 | foil bag  | 20x600 ml      | 36 cardboards  |  |
| 5514 | 236 Grey RAL 7004  | foil bag  | 20x600 ml      | 36 cardboards  |  |
| 5512 | 290 Black          | foil bag  | 20x600 ml      | 36 cardboards  |  |

## STRONG

Super strong, hybrid polymer adhesive with high initial tack. No need of external mechanical fixture during hardening.

- Suitable for substrates subject to vibrations
- High mechanical resistance
- Resistant to atmospheric agents
- Adheres without primer even on damp substrates

Consumption per linear metre joint section 15 x 3 mm: 45 ml  
Linear metres made from one cartridge: 6,4



| Code | Color     | Packaging | Packaging size | Pallet         |  |
|------|-----------|-----------|----------------|----------------|--|
| 8007 | 105 White | cartridge | 12x290 ml      | 104 cardboards |  |


**SITOL® MARINE**

A hybrid polymer-based adhesive-sealant with fast curing and high initial adhesion, designed for bonding and sealing applications on yachts and boats, certified IMO MED and suitable for deck/bridge and lower deck wall, floor and ceiling applications.

- Excellent ageing and weathering resistance
- Excellent adhesion without primer on all materials typical of the marine industry



| Code | Color | Packaging | Packaging size | Pallet         |
|------|-------|-----------|----------------|----------------|
| 8330 | Black | cartridge | 12x290 ml      | 130 cartboards |
| 8329 | Grey  | cartridge | 12x290 ml      | 130 cartboards |
| 8328 | White | cartridge | 12x290 ml      | 130 cartboards |

**SITOL® DECK CAULKING**

Fast-curing hybrid polymer-based sealant for caulking classic teak with sandable properties. Also suitable for sealing between deck and synthetic teak.

- Sandable after curing
- Excellent UV and ageing resistance
- High chemical resistance
- Very good workability



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 5662 | Black | cartridge | 24x290 ml      | 64 cardboards |
| 5673 | Black | foil bag  | 20x600 ml      | 36 cardboards |



## SITOL® DECK BONDING

Hybrid polymer-based adhesive-sealant with extended open time for natural and synthetic teak.

- Excellent UV and ageing resistance
- Long-term resistance to contact with fresh and salt water
- Excellent adhesion on various substrates without the use of primers
- Excellent workability



| Code | Color | Packaging | Packaging size | Pallet         |
|------|-------|-----------|----------------|----------------|
| 5668 | White | foil bag  | 20x600 ml      | 36 cartboards  |
| 5663 | White | cartridge | 12x290 ml      | 116 cartboards |



## HY 2.0 EKOR

Single-component adhesive-sealant based on hybrid polymers, with mould resistant formulation, for overpaintable elastic bonding and sealing of connection joints, for general construction and industry applications. It cures by reaction with atmospheric humidity.

Consumption per linear metre joint section 10 x 10 mm: 100 ml  
Linear metres made from one cartridge: 2,9



| Code | Color             | Packaging | Packaging size | Pallet         |
|------|-------------------|-----------|----------------|----------------|
| 8037 | 010 Crystal clear | cartridge | 12x290 ml      | 100 cartboards |



## 1.5 POLYURETHANE SEALANTS

### TACK PU

Single-component, quick-setting polyurethane adhesive for maximum bonding.

- Excellent adhesion to aluminium and other surfaces, even damp ones
- Quick curing
- Easy and fast bonding without perforating the substrates
- High final mechanical resistance
- Sandable and paintable
- Waterproof and resistant to atmospheric agents
- Suitable for bead and trowel applications
- Odourless and solvent-free
- Suitable for structural bonding of wood in ship building

Consumption for optimal bonding: 150 gr/m<sup>2</sup>



| Code | Color                                                                                   | Packaging | Packaging size | Pallet         |
|------|-----------------------------------------------------------------------------------------|-----------|----------------|----------------|
| 8327 |  Ivory | cartridge | 12x310 ml      | 125 cardboards |



### PU HM EDILIA

High performance polyurethane adhesive/sealer for façades and floors.

- Excellent resistance to weather and ageing
- High modulus of elasticity
- It bonds and seals simultaneously
- Paintable
- Indoor and outdoor use, even on damp substrates

Consumption per linear metre joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1

Linear metres made with a bag: 6



| Code | Color                                                                                     | Packaging | Packaging size | Pallet         |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|----------------|
| 8143 |  White | cartridge | 12x310 ml      | 125 cardboards |
| 8144 |  Grey  | cartridge | 12x310 ml      | 125 cardboards |
| 8145 |  Black | cartridge | 12x310 ml      | 125 cardboards |
| 8146 |  White | foil bag  | 20x600 ml      | 50 cardboards  |
| 8147 |  Grey  | foil bag  | 20x600 ml      | 50 cardboards  |



## 1.6 SPECIAL PRODUCTS

### TACK

Multi-purpose adhesive based on acrylic resins for internal applications.

- High adhesion
- Easy to use
- Solvent-free product

Consumption per linear metre joint section 14 x 2 mm: 28 ml

Linear metres made from one cartridge: 11



| Code | Color                                                                                       | Packaging | Packaging size | Pallet        |
|------|---------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 8154 |  145 Ivory | cartridge | 24x310 ml      | 60 cardboards |



### REFRACTORY

Refractory mastic for grouting in situations exposed to temperatures up to 1000 °C.

- Suitable for direct exposure to open flame
- Ideal for sealing and filling joints, cracks and fissures in boilers, chimneys, ovens, mufflers
- Excellent workability also in vertical
- Quick and easy application

Consumption per linear metre joint section 10 x 10 mm: 100 ml

Linear metres made from one cartridge: 3,1



| Code | Color                                                                                        | Packaging | Packaging size | Pallet        |
|------|----------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 6994 |  230 Grey | cartridge | 24x310 ml      | 64 cardboards |



## BITUMEN SEAL

Ready-to-use, single-component elasto-plastic adhesive-sealant, based on bituminous polymers in solvent, specific for bonding and sealing various types of substrates, even the wet ones.



| Code | Color                                                                                       | Packaging | Packaging size | Pallet        |
|------|---------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 8021 |  290 Black | cartridge | 12x280 ml      | 72 cardboards |



8030334080210

## SMOOTH

Neutral smoothing agent based on amphoteric surfactants in aqueous solution, for professional surface finishing of connection joints and expansion joints made with silicone, acrylic and hybrid sealants.

Depending on the laying technique: approx. 0.3 l/m<sup>2</sup>



| Code | Color                                                                                           | Packaging | Packaging size | Pallet        |
|------|-------------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 5457 |  Transparent | bottle    | 8x750 ml       | 46 cardboards |



8030334054570

## 1.7 ACCESSORIES FOR SEALANTS

### SYNTHETIC PLUGGING CORD

Closed-cell polythene plugging cord of variable thickness for preparation of expansion joints.

- Correct joint sizing
- Avoids waste of material
- Isolates the sealant from the joint bottom
- Quick and easy application



| Code  | Color                                                                                  | Thickness | Packaging | Packaging size |
|-------|----------------------------------------------------------------------------------------|-----------|-----------|----------------|
| 15365 |  Grey | Ø 30 mm   | roll      | 180 m          |
| 15366 |  Grey | Ø 40 mm   | roll      | 120 m          |
| 15013 |  Grey | Ø 10 mm   | roll      | 600 m          |
| 15014 |  Grey | Ø 15 mm   | roll      | 250 m          |
| 15015 |  Grey | Ø 20 mm   | roll      | 150 m          |



### NOZZLE FOR FOIL BAGS

Nozzle for sealants in foilbags.



| Code | Packaging | Packaging size |
|------|-----------|----------------|
| 5548 | cartboard | 50 piece       |



## CARTRIDGE NOZZLES



| Code | Packaging | Packaging size |
|------|-----------|----------------|
| 5421 | cartboard | 100 piece      |



8030334054211





## 2. Polyurethane Foams

2.1 Polyurethane Adhesives

2.2 Polyurethane Foams

2.3 Accessories for Polyurethane Foams



## 2.1 POLYURETHANE ADHESIVES

### PANEL F

Single-component, quick-hardening polyurethane adhesive for bonding plasterboard and insulation panels.

- Excellent adhesion on various types of porous and non-porous substrates
- It solves any adhesion problem on smooth or moulded boards (adhesion to polystyrene according to ETAG 004)
- Extremely fast installation: after 2 hours it can be dowelled and immediately smoothed afterwards
- Installation time reduced up to 50% compared to cement glue
- Significant reduction of processing and overall costs: with one can it is possible to install about 12 m<sup>2</sup> of insulation panels
- Avoids the formation of thermal bridges
- Extremely clean construction site

Linear metres achieved with one tank: 50 m per 12 m<sup>2</sup> di insulation panels laid



| Code | Color                                                                                            | Application     | Packaging | Packaging size | Pallet        |
|------|--------------------------------------------------------------------------------------------------|-----------------|-----------|----------------|---------------|
| 5558 |  Natural yellow | Gun application | can       | 12x750 ml      | 42 cardboards |



8030334055584

### HIGH TACK

Polyurethane adhesive for waterproof bonding and sealing.

- Good chemical resistance
- Highly impermeable (up to 0,5 bar)
- Tested for installation of insulation boards in accordance with ETAG 004
- Fast laying times (50% faster than laying thin bed mortars)
- Usable in temperatures above -5 °C
- Excellent adhesion onto various kinds of surfaces

Yield in terms of laid masonry surface area: 5 - 10 m<sup>2</sup>

Linear metres achieved with one tank: 40 m (5 m<sup>2</sup> of insulation panels laid)



| Code | Color                                                                                          | Application     | Packaging | Packaging size | Pallet        |
|------|------------------------------------------------------------------------------------------------|-----------------|-----------|----------------|---------------|
| 5337 |  Light blue | Gun application | can       | 12x750 ml      | 42 cardboards |



8030334053375

## HYDRO

Specific one-component polyurethane adhesive for waterproof sealing of hydraulic elements.

- Quick and easy application
- Quick drying and hardening compared to traditional application with mortar or cement-based adhesive
- Excellent adhesion capacity on all types of substrates, even wet
- Good chemical resistance to bacteria normally present in wet environments
- Usable at temperatures beyond the usual range for cement-based mortars (down to -5 °C)
- High waterproofing capacity (up to 0.5 bar)

Yield in litres free expansion: 40 l

Linear metres achieved with one tank: 40



| Code | Color                                                                                        | Application        | Packaging | Packaging size | Pallet        |
|------|----------------------------------------------------------------------------------------------|--------------------|-----------|----------------|---------------|
| 6319 |  Light blue | Manual application | can       | 12x750 ml      | 42 cardboards |



8030334063190

## 2.2 POLYURETHANE FOAMS

### COPPI MERANO

High-performance PU foam with extended open time and maximum adhesion for roof tiles.

- Up to 15 m<sup>2</sup> of laid tile surface
- Wind-resistant
- Reduced post-expansion
- Waterproof
- High tear resistance

Yield in litres free expansion: 26 l

Surface area laid per can: 15 m<sup>2</sup>



| Code | Color                                                                                     | Application     | Packaging | Packaging size | Pallet        |
|------|-------------------------------------------------------------------------------------------|-----------------|-----------|----------------|---------------|
| 5572 |  Brown | Gun application | can       | 12x750 ml      | 42 cardboards |



8030334055720

## VOLT

Glow wire resistant polyurethane foam for electrical installations.

- All-season formulation
- Tested according to Glow wire test at 850 °C
- Suitable for fixing and sealing junction boxes and cable conduits
- Reduced post-expansion during curing
- Can be sanded and plastered

Yield in litres free expansion: 45 l

Linear metres achieved with one can: 45



| Code   | Color                                                                                            | Application     | Packaging | Packaging size | Pallet        |
|--------|--------------------------------------------------------------------------------------------------|-----------------|-----------|----------------|---------------|
| 5633   |  Natural yellow | Gun application | can       | 12x750 ml      | 42 cardboards |
| 8046-1 |  White          | Gun application | can       | 12x750 ml      | 70 cardboards |



## WINDOW & DOOR

Polyurethane foam for various type of installations.

- Ideal for thermal and acoustic isolation
- usable from -10 to +35 °C
- Suitable for electrical and hydraulic installations
- Waterproof
- Up to 45 l

Yield in litres free expansion: 45 l

Linear metres achieved with one can: 45



| Code | Color                                                                               |                | Application        | Packaging | Packaging size | Pallet        |
|------|-------------------------------------------------------------------------------------|----------------|--------------------|-----------|----------------|---------------|
| 6345 |  | Natural yellow | Manual application | can       | 12x750 ml      | 42 cardboards |
| 6347 |  | Natural yellow | Gun application    | can       | 12x750 ml      | 42 cardboards |



## COPPI

Polyurethane foam with extended open time, reduced post-expansion, and high tear resistance.

- Up to 10 m<sup>2</sup> area of laid tiles
- Waterproof
- High tear resistance
- Wind-resistant
- Long open time

Yield in litres free expansion: 26 l

Linear metres achieved with one tank: 45



| Code | Color | Application        | Packaging | Packaging size | Pallet        |
|------|-------|--------------------|-----------|----------------|---------------|
| 6909 | Brown | Gun application    | can       | 12x750 ml      | 42 cardboards |
| 6427 | Brown | Manual application | can       | 12x750 ml      | 42 cardboards |



## FLEX 365

Flexible polyurethane foam for the assembly of wooden, PVC or aluminium window frames and shutters, up to -10 °C.

- Application at any temperature from -10 °C to +35 °C
- Ideal for thermal and acoustic insulation
- Excellent alternative to laying multifunctional self-expanding tapes
- Reduced post-expansion
- Elongation at break > 40
- Certified very-low emission EC1 Plus
- Air tightness up to 1000 Pa

Yield is highly dependent on can and ambient temperatures. Free expansion yield: 35 litres.

The values indicated refer to laboratory conditions and may vary considerably depending on the actual application and environmental conditions.



| Code | Color | Application     | Packaging | Packaging size | Pallet        |
|------|-------|-----------------|-----------|----------------|---------------|
| 5561 | White | Gun application | can       | 12x750 ml      | 42 cardboards |



## FIRE RESISTANT

Polyurethane foam with high resistance to fire.

- Fire resistance up to EI 120
- Up to 30 linear meters of performance
- Ideal for applications subject to fire regulations
- Ideal for mounting electrical junction boxes/plants

Yield in litres free expansion: 41 l

Linear metres achieved with one tank: 40



| Code | Color | Application        | Packaging | Packaging size | Pallet        |
|------|-------|--------------------|-----------|----------------|---------------|
| 5533 | Grey  | Manual application | can       | 12x750 ml      | 42 cardboards |
| 6911 | Grey  | Gun application    | can       | 12x750 ml      | 42 cardboards |



8030334069116

## MULTIUSO

Multi-purpose polyurethane foam.

- Up to 50 l yield
- For acoustic and thermal insulation
- Waterproof

Yield in litres free expansion: 50 l

Linear metres achieved with one tank: 30



| Code | Color          | Application        | Packaging | Packaging size | Pallet        |
|------|----------------|--------------------|-----------|----------------|---------------|
| 5067 | Natural yellow | Manual application | can       | 12x750 ml      | 42 cardboards |
| 5333 | Natural yellow | Gun application    | can       | 12x750 ml      | 42 cardboards |



8030334053337

**F 2.0** *EKOR*

Elastic one-component polyurethane foam for the assembly of window frames in wood, pvc or aluminium. It guarantees rapidity and cleaning during installation. Adheres to most porous and non-porous supports.

Yield: 35 l



| Code | Color | Application     | Packaging | Packaging size | Pallet        |
|------|-------|-----------------|-----------|----------------|---------------|
| 8046 | White | Gun application | can       | 12x750 ml      | 70 cardboards |



8030334080463

**C 2.0** *EKOR*

Highly adhesive single-component polyurethane foam for installation of roof tiles or bent tiles. It hardens by reaction with the humidity of the atmosphere and of the substrates. It guarantees quick, easy and clean installation operations.

Tank surface: manual 8 m<sup>2</sup>; gun 10 m<sup>2</sup>



| Code | Color          | Application        | Packaging | Packaging size | Pallet        |
|------|----------------|--------------------|-----------|----------------|---------------|
| 8044 | Natural yellow | Manual application | can       | 12x750 ml      | 70 cardboards |
| 8045 | Natural yellow | Gun application    | can       | 12x750 ml      | 70 cardboards |



8030334080449



8030334080456

**M 2.0** EKOR

Single-component multifunctional polyurethane foam for thermo-insulating filling and bonding in building, industrial and plant engineering sectors. It guarantees quick and clean installation operations. It adheres to most porous and non-porous substrates.

Yield: manual 30 l; gun 40 l



| Code | Application        | Packaging | Packaging size | Pallet        |
|------|--------------------|-----------|----------------|---------------|
| 8042 | Manual application | can       | 12x750 ml      | 70 cardboards |
| 8043 | Gun application    | can       | 12x750 ml      | 70 cardboards |



8030334080425



8030334080432

## 2.3 ACCESSORIES FOR POLYURETHANE FOAMS

### CLEANER FOR POLYURETHANE FOAMS

Spray cleaner for fresh polyurethane foam of any type.

- Easy application
- Fast action without residues
- Dual use: with gun or by means of the dispenser button




| Code  | Packaging | Packaging size |
|-------|-----------|----------------|
| 15010 | can       | 12 x 500ml     |




8030334150104



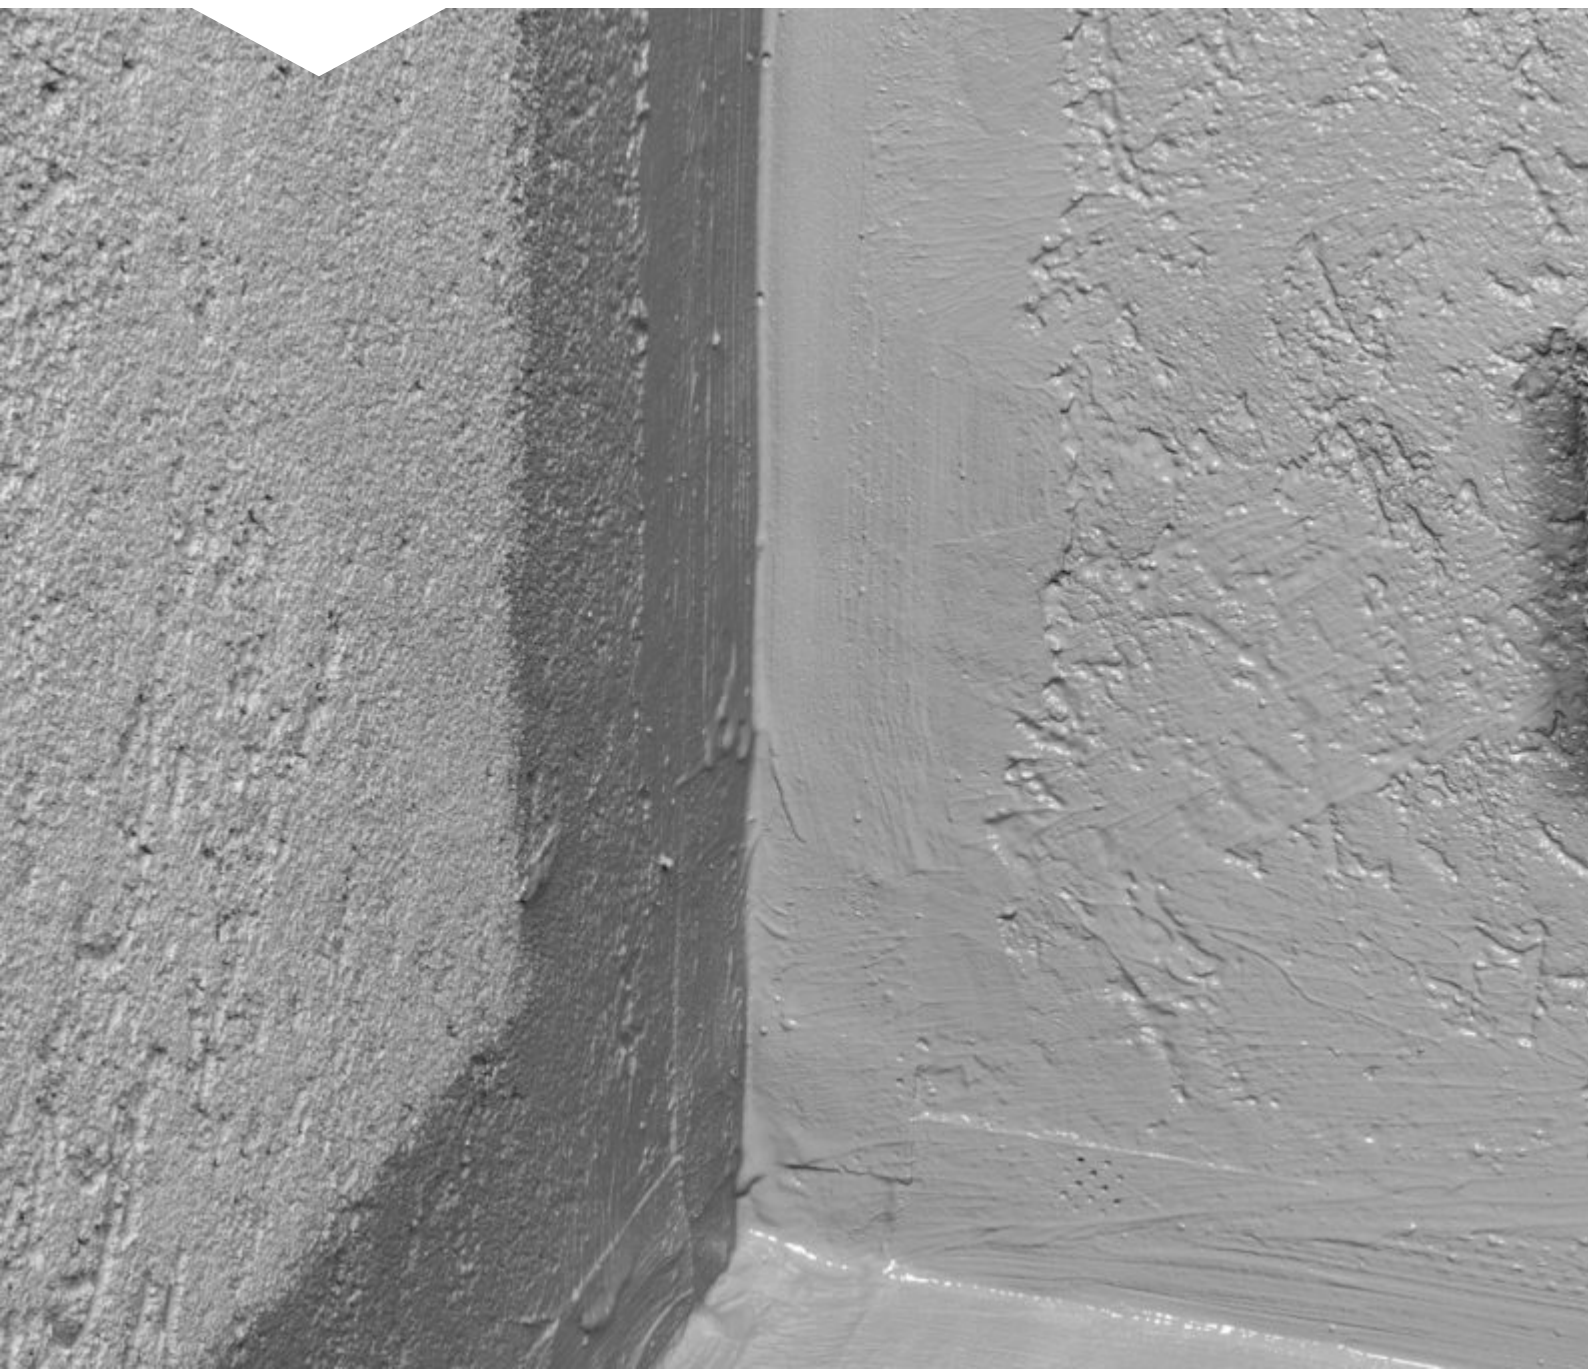

# 3. Waterproofing

- 3.1 Primers for Waterproofers
- 3.2 Cementitious Waterproofers
- 3.3 Polymeric Waterproofers
- 3.4 Polyurethane Waterproofers
- 3.5 Bituminous waterproofers
- 3.6 Accessories for Waterproofing

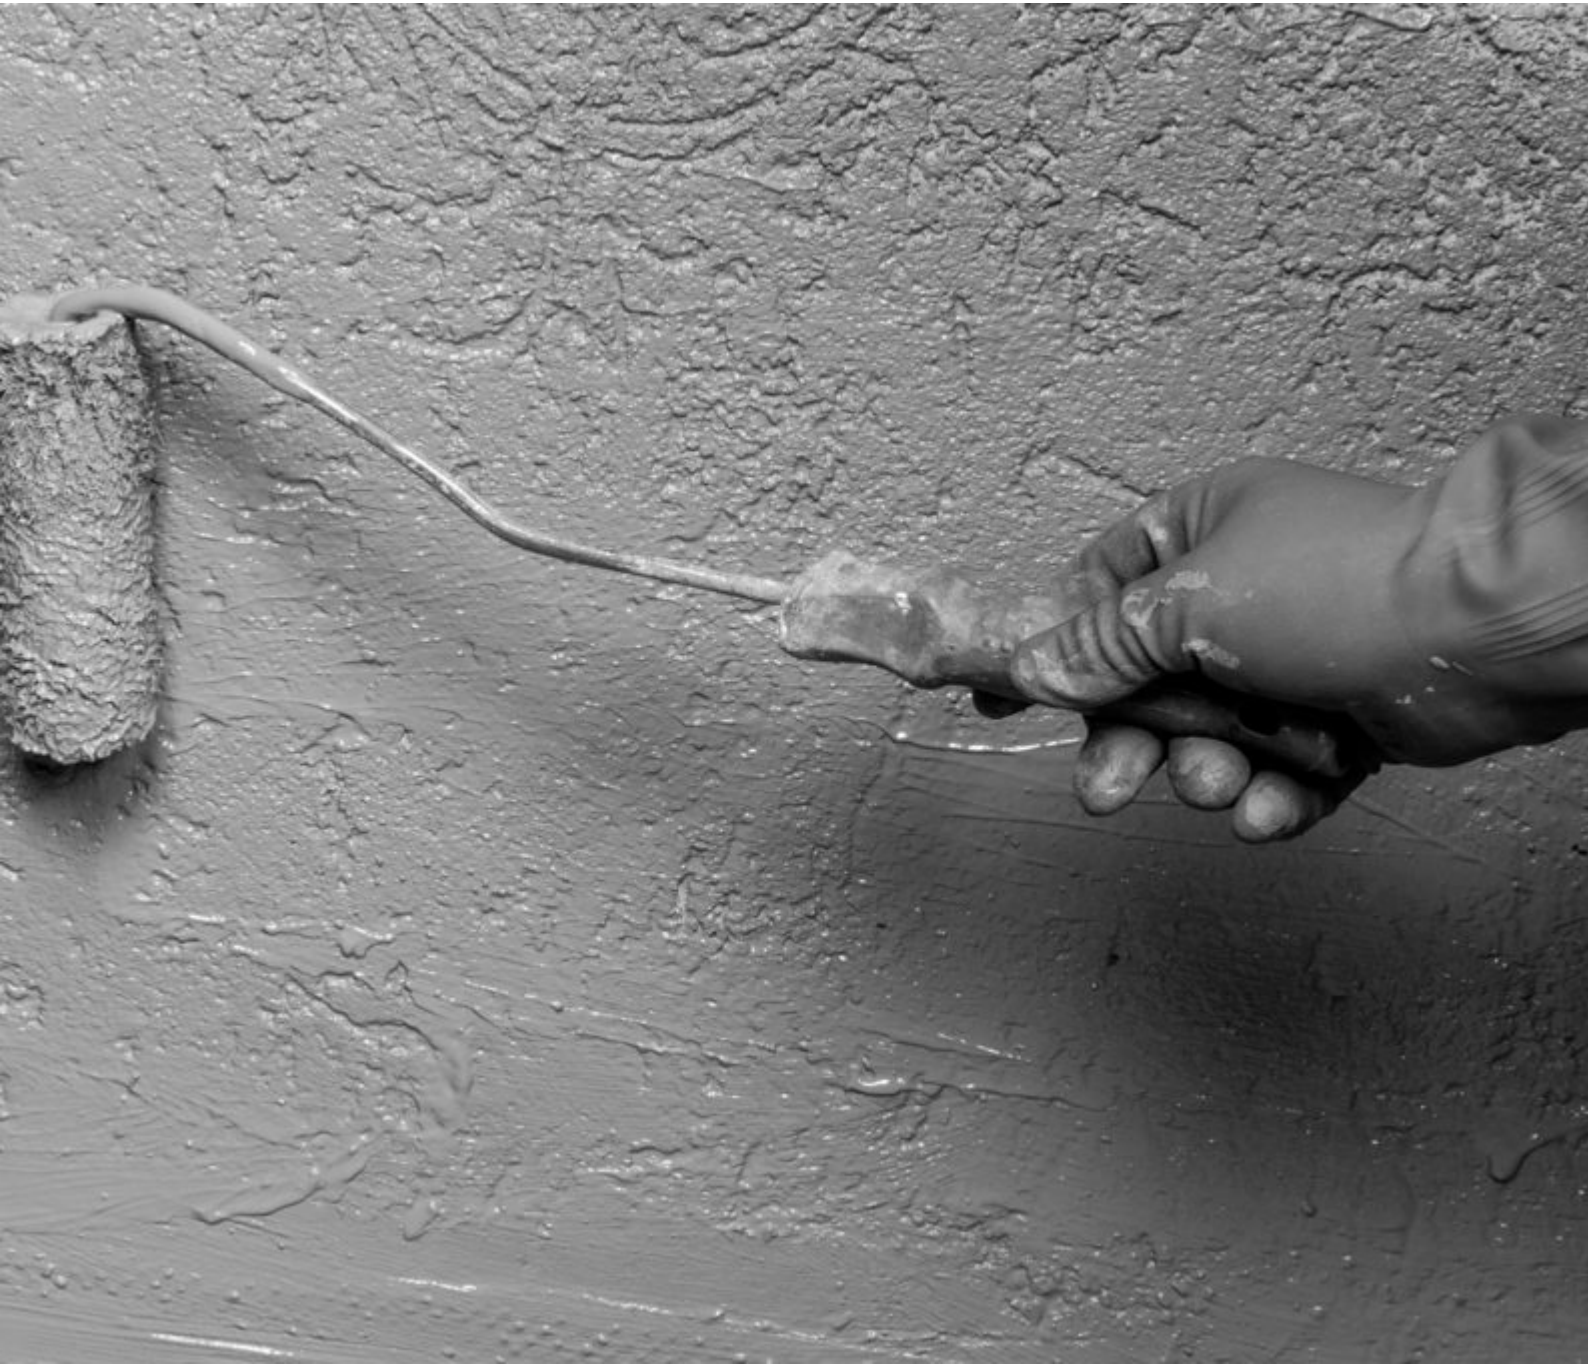

## 3.1 PRIMERS FOR WATERPROOFERS

### PRIMER AQUATECH

Aquatech waterproofing liquid sheath primer.

- Perfect adhesion on critical substrates such as bituminous sheaths and metal substrates
- Ready to use

Consumption: 0,1 - 0,2 l/m<sup>2</sup>



| Code | Packaging    | Packaging size |
|------|--------------|----------------|
| 8186 | metal bucket | 4x1 l          |



### FLEX PU PRIMER

Polyurethane based primer, with low viscosity, suitable for porous and non-porous substrates.

- Single-component
- Low viscosity
- Strong adhesion on vitrified surfaces and non-porous substrates
- Excellent wetting, impregnation and painting over time

The minimum consumption of Flex PU Primer is 50-200 g/m<sup>2</sup>



| Code | Packaging | Packaging size | Pallet        |
|------|-----------|----------------|---------------|
| 8072 | canister  | 4x5 l          | 30 cardboards |



## FLEX PU PRIMER 2K

Two-component water-based primer/coating.

- Easy to apply and clean
- Odourless, safe and non-flammable (zero VOC)
- Suitable for indoor applications
- Water-repellent barrier
- Strong adhesion on wet or green concrete, iron, galvanized steel, aluminium, glass and wood
- Good mechanical properties and abrasion resistance

For consumption see technical data sheet.



| Code | Bicomponent  | Packaging | Packaging size | Pallet     |
|------|--------------|-----------|----------------|------------|
| 8073 | 2 components | bucket    | 4 kg           | 84 buckets |



## 3.2 CEMENTITIOUS WATERPROOFERS

### FLEXISTAR

Extra-flexible, single-component, fibre-reinforced cementitious polymer sheath for waterproofing and protecting concrete.

- Highly adhesive to the substrate
- Excellent workability
- Applicable with roller, brush and trowel
- Suitable for contact with drinking water
- UV resistant
- Waterproof even under pressure
- Resistant to freeze-thaw cycles
- Good treadable surface

Consumption: approx. 1,2 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 5324 | Grey  | bag       | 4x5 kg         | 40 cardboards |
| 5002 | Grey  | bag       | 20kg           | 50 bags       |



## FLEXISTAR RAPID

Single component, flexible, fibre-reinforced, cementitious, polymer waterproofing membrane with fast hardening.

- Fast hardening
- Highly adhesive to the substrate
- Excellent workability
- Applicable with roller, brush and trowel
- Waterproof even under pressure
- Resistant to freeze-thaw cycles
- Good treadable surface

Consumption: approx. 1,2 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5532 | Grey  | bag       | 20kg           | 50 bags |



## FLEX 2K

Two-component, flexible, fibre-reinforced, waterproofing cementbased mortar, which can be reinforced with fibreglass mesh, for flexible waterproofing and protective smoothing of cementitious substrates. Good UV resistance, elastic to -20 °C.

- Fibre-reinforced
- Extra high flexibility
- High anti-CO<sub>2</sub> and UV resistant protection
- Resistant to frost-thaw cycles
- Suitable for substrates even of large size and with a certain mobility
- For indoor and outdoor use. Waterproof even under pressure
- The waterproofing in combination with tiles complies with DIN 18531, DIN 18534 and DIN 18535
- Waterproofing of building components in contact with the ground according to DIN 18 533-1 for Water Impact Classes W1-E, W2.1E, W2-B, W4-E
- With "General Building Inspection Test Certificates"

Consumption: Comp. A ca. 1,4 kg/m<sup>2</sup>/mm - Comp. B ca. 0,5 kg/m<sup>2</sup>/mm



| Code | Color | Bicomponent  | Packaging      | Packaging size | Pallet                 |
|------|-------|--------------|----------------|----------------|------------------------|
| 6362 | Grey  | 2 components | bag + canister | 25 kg + 8,5 kg | 50 bags + 50 canisters |



## FLEX 1K

Single-component, flexible, fibre-reinforced, waterproofing cementitious mortar, which can be reinforced with fibreglass mesh, for flexible waterproofing and protective smoothing of cementitious substrates.

- New improved formula with new generation fibres
- Excellent workability and easy to apply
- Excellent adhesion to the substrate
- Waterproof even under pressure
- Resistant to frost-thaw cycles
- UV Resistant

Consumption: approx. 1,4 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6361 | Grey  | bag       | 25 kg          | 50 bags |



8030334063619

## AQUAPROOF

Fine waterproofing mortar.

- Very easy to apply with roller or brush
- Spray application
- Excellent waterproofing capability
- Good permeability to water vapour
- Can be used in environments with negative hydrostatic pressure

Consumption: 2-6 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6360 | Grey  | bag       | 25 kg          | 50 bags |



8030334063602

**STOP**

Very fast-setting pre-mixed mortar.

Consumption is approximately 1.6 kg per litre of cavity to be filled.



| Code | Color                                                                                  | Packaging | Packaging size | Pallet        |
|------|----------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 5441 |  Grey | bag       | 4x5 kg         | 40 cardboards |



### 3.3 POLYMERIC WATERPROOFERS

**PROMURAL SILICON**

Transparent, ready-to-use hydrophobising impregnating agent based on siloxane polymers dissolved in solvent, type H for PI, MC, IR according to EN 1504-2, for the protective treatment of absorbent mineral substrates.

- **Good penetration capacity**
- **Very high resistance to lime and cement (unlike silicone based impregnating agents that can be diluted with water that are rapidly degraded by cement substrates)**
- **Non-sticky after drying**
- **High permeability to water vapour**
- **Exceptionally waterproof (heavy rainfall pushed by winds at a speed of 100 km/h cannot penetrate the substrate)**
- **Unchanged effectiveness over time (proven effectiveness for a period of 15 years)**

Consumption: 0,2 - 1,0 l/m<sup>2</sup>



| Code | Color                                                                                           | Packaging    | Packaging size | Pallet           |
|------|-------------------------------------------------------------------------------------------------|--------------|----------------|------------------|
| 8187 |  Transparent | metal bucket | 18x1 l         | 24 cardboards    |
| 8188 |  Transparent | metal bucket | 5 l            | 90 metal buckets |
| 8189 |  Transparent | metal bucket | 20 l           | 33 metal buckets |



## EMULSIONE EPOSSIDICA 723

Protective, water-based, type C, two-component epoxy resin paint, according to EN 1504-2.

- Water-based (solvent-free and non-flammable)
- High abrasion resistance
- Good resistance to chemical agents

Consumption: 150 g/m<sup>2</sup>/layer

Total consumption: 400 - 800 g/m<sup>2</sup>



| Code | Color | Bicomponent  | Packaging | Packaging size |
|------|-------|--------------|-----------|----------------|
| 5482 | Ivory | 2 components | bucket    | 4x3 kg         |
| 5483 | Grey  | 2 components | bucket    | 4x3 kg         |
| 5484 | Red   | 2 components | bucket    | 4x3 kg         |



## EPOXY

Two-component epoxy protection coating.

- Solvent-free
- Resistant to chemicals
- High thickness also in vertical

Consumption: 600 - 800 g/m<sup>2</sup>



| Code | Color | Bicomponent  | Packaging | Packaging size |
|------|-------|--------------|-----------|----------------|
| 5487 | Grey  | 2 components | bucket    | 4x3 kg         |



## AQUATECH

Single-component liquid waterproofing sheath in water emulsion.

- High elasticity
- Resistant to water stagnation
- Good treadable surface
- Can be covered with ceramic tiles
- High initial solar reflectance index (SRI) for white version
- According to DIN 18534: for wall and floor surfaces in water exposure classes W0-I and W1-I as well as, together with Tile 250 or Tile 480 adhesives, on wall surfaces in zone W2-I (without Class C)
- With "General Building Authority Test Certificate"

Consumption: 1 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet     |  |
|------|-------|-----------|----------------|------------|--|
| 5074 | White | bucket    | 6kg            | 64 buckets |  |
| 5115 | Red   | bucket    | 6kg            | 64 buckets |  |
| 5075 | Grey  | bucket    | 6kg            | 64 buckets |  |
| 5076 | White | bucket    | 15 kg          | 33 buckets |  |
| 5116 | Red   | bucket    | 15 kg          | 33 buckets |  |
| 5077 | Grey  | bucket    | 15 kg          | 33 buckets |  |

## AQUATECH RAPID

Fast-drying, elastic liquid membrane for indoor waterproofing.

- Flexible
- Creamy
- Rapid

Consumption: 1,2 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet     |  |
|------|-------|-----------|----------------|------------|--|
| 5565 | White | bucket    | 6kg            | 64 buckets |  |
| 5566 | Grey  | bucket    | 6kg            | 64 buckets |  |
| 5567 | White | bucket    | 15 kg          | 33 buckets |  |
| 5568 | Grey  | bucket    | 15 kg          | 33 buckets |  |

## 3.4 POLYURETHANE WATERPROOFERS

### FLEX PU 2K

Two-component, solvent-free thixotropic coating, suitable for waterproofing and protecting tanks.

- Excellent adhesion to almost every surface
- Highly hydrophobic and extremely resistant to hydrolysis
- Resistant to temperatures from -40 °C up to +90 °C
- Good resistance to chemical agents
- Certified for contact with drinking water

Consumption: 1,4 kg/m<sup>2</sup>/two layers



| Code | Bicomponent  | Packaging | Packaging size | Pallet     |
|------|--------------|-----------|----------------|------------|
| 8079 | 2 components | bucket    | 9 kg           | 50 buckets |



8030334080791

### FLEX PU FINISH

Single-component non-yellowing elastic membrane for protection and waterproofing.

- Highly hydrophobic
- Excellent resistance to weathering and UV rays, does not yellow and is totally aliphatic
- Excellent mechanical properties, high tensile strength and tear resistance
- Excellent chemical and hydrolysis resistance

Consumption: 200 - 500 g/m<sup>2</sup>



| Code | Color                                                                                     | Packaging | Packaging size | Pallet     |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|------------|
| 8078 |  White | bucket    | 15 kg          | 40 buckets |



8030334080784

## FLEX PU FINISH BASE

Transparent, non-yellowing, elastic, single-component polyurethane coating.

- **Excellent adhesion to almost every surface**
- **Highly hydrophobic**
- **Totally aliphatic, does not yellow when exposed to UV light**
- **Excellent mechanical properties, very high tensile strength and tear resistance**
- **Vulcanizes even at low temperatures and under a film of water**
- **Excellent elasticity**
- **Good resistance to chemical agents**

The consumption of Flex PU Finish Base depends on the porosity of the substrate and the purpose of the application.

As protection of Flex PU: from 100 to 200 g/m<sup>2</sup>.

To seal cement: 100 to 150 g/m<sup>2</sup>.

In general, apply a maximum of 500 g/m<sup>2</sup> each coat.



| Code | Color                                                                                         | Packaging | Packaging size | Pallet        |
|------|-----------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 8077 |  Transparent | canister  | 4x4 l          | 30 cardboards |



8030334080777

## FLEX PU

Single-component polyurethane liquid membrane for waterproofing and protection. Suitable for waterproofing and protection of roofs, lightweight sheet metal or fibre cement roofs, asphalt membranes, parking lots and stadium stands, bridge platforms and irrigation channels.

- **Excellent adhesion to almost any surface, with or without special adhesion promoters**
- **No dilution is necessary**
- **Excellent weathering and UV resistance**
- **Excellent thermal resistance**
- **Resistance to low temperature: the membrane remains elastic even at -40 °C**
- **Excellent mechanical properties, high tensile strength and tear resistance, abrasion resistance**
- **Good resistance to chemical agents**

Consumption: 1,5 - 1,8 kg/m<sup>2</sup>/two layers



| Code | Color                                                                                     | Packaging | Packaging size | Pallet     |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|------------|
| 8074 |  White | bucket    | 25 kg          | 30 buckets |
| 8076 |  Red   | bucket    | 25 kg          | 30 buckets |
| 8075 |  Grey  | bucket    | 25 kg          | 30 buckets |



8030334080746



8030334080760



8030334080753

## 3.5 BITUMINOUS WATERPROOFERS

### ASFREDOL 1000

Cold asphalt, composed of an anionic bituminous emulsion, free of organic solvents, for waterproofing and surface protection of porous surfaces, both wet and dry.

- Odourless
- Easy to use
- Fast drying
- High flexibility
- High impermeability

Consumption: 0,8 - 1,2 kg/m<sup>2</sup>



| Code  | Color                                                                                   | Packaging | Packaging size | Pallet     |
|-------|-----------------------------------------------------------------------------------------|-----------|----------------|------------|
| 15179 |  Black | bucket    | 20kg           | 33 buckets |



### ASFREDOL 2000

Resin-bonded cold bituminous emulsion ready to use.

- Odourless
- Easy to use
- Fast drying
- High flexibility
- High impermeability and chemical resistance
- Great thixotropy
- Non-toxic, solvent-free product
- Good resistance to saline solutions

Consumption: 1 - 2 kg/m<sup>2</sup>



| Code  | Color                                                                                     | Packaging | Packaging size | Pallet     |
|-------|-------------------------------------------------------------------------------------------|-----------|----------------|------------|
| 15180 |  Black | bucket    | 20kg           | 33 buckets |



**SITOL A**


Bituminous, waterproofing and anti-corrosion paint.

- Fast drying
- Non-sticky

Consumption: 250 - 300 ml/m<sup>2</sup>



| Code | Color | Packaging    | Packaging size | Pallet           |
|------|-------|--------------|----------------|------------------|
| 8176 | Black | metal bucket | 18x1 l         | 24 cardboards    |
| 8177 | Black | metal bucket | 5 l            | 96 latte         |
| 8178 | Black | metal bucket | 20 l           | 33 metal buckets |

**BLACK HYDRO EASY**

Multipurpose, thixotropic, bituminous liquid waterproofer made up of inert fillers, elastomeric resins and additives. Suitable for waterproofing earth retaining foundation walls. Used as sealant and finisher for roof waterproofing and insulation panel bonding applications.

- Good elasticity
- Provides protection against water, the elements and UV rays
- Resistant to the corrosive action of many acids
- Easy cold application
- Perfect adherence on different materials
- Compatible with cementitious adhesives
- Odourless and non-flammable
- Non-toxic, solvent-free

Consumption: 1,2 - 1,8 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet     |
|------|-------|-----------|----------------|------------|
| 8122 | Black | bucket    | 5 kg           | 80 buckets |
| 8068 | Black | bucket    | 20kg           | 33 buckets |



**BLACK HYDRO LIGHT**

Elastomeric bituminous waterproofer lightened with rubber granules for waterproofing horizontal and vertical concrete and brick surfaces.

Consumption: 1,3 - 1,7 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet     |
|------|-------|-----------|----------------|------------|
| 8069 | Black | bucket    | 20kg           | 33 buckets |

**BLACK HYDRO PITTURA**

Solvent-based protective and decorative paint, based on bitumen, aluminium paste, selected synthetic resins and special additives.

- High reflectance
- Insulating and protective properties

Consumption: 300/400 m<sup>2</sup>



| Code | Color     | Packaging | Packaging size | Pallet     |
|------|-----------|-----------|----------------|------------|
| 8171 | Aluminium | bucket    | 20 l           | 33 buckets |

**BLACK HYDRO POLY 1K**

Single component, polymer-modified bituminous thick coating.

Consumption: 3,7 l/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet     |
|------|-------|-----------|----------------|------------|
| 8168 | Black | bucket    | 30 l           | 18 buckets |



**BLACK HYDRO POLY 2K**

Bicomponent, polymer-modified, bituminous thick coating.

Consumption: 3,5 l/m<sup>2</sup>



| Code | Color                                                                                   | Bicomponent  | Packaging | Packaging size | Pallet     |
|------|-----------------------------------------------------------------------------------------|--------------|-----------|----------------|------------|
| 8169 |  Black | 2 components | bucket    | 30 l           | 18 buckets |

**BLACK HYDRO SPRAY**

Solvent-based bituminous waterproofing protective sealant in spray can, suitable on any type of substrate.

Consumption: ca. 4 m<sup>2</sup>/tank



| Code | Color                                                                                     | Packaging | Packaging size |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|
| 8070 |  Black | can       | 12 x 500ml     |



**BW 100** EKOR

Bituminous liquid waterproofer.

- It waterproofs concrete surfaces affected by micro cracks and surfaces subject to thermal expansion
- Once dried it has excellent elasticity
- It adapts to any surface geometry to be coated
- Faster drying times compared to bituminous emulsions
- Good resistance to stagnant water
- Resistant to low temperatures: it can also be used in the winter period
- Excellent resistance on surfaces of industrial areas

Consumption: 0,8 - 1 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet     |
|------|-------|-----------|----------------|------------|
| 8066 | Black | bucket    | 20kg           | 33 buckets |

**BW 200** EKOR

Multi-function bituminous waterproofer.

- High waterproofing power
- Excellent adhesion to the substrate
- High elasticity
- Duration in time
- Resistance to weathering, UV rays and occasional water stagnation
- Easy laying: allows considerable savings in time and manpower
- Can be left exposed or covered with cement-based mortar and can be painted
- Odourless, solvent-free, non-flammable product

Consumption: 1,5 - 2 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet     |
|------|-------|-----------|----------------|------------|
| 8123 | Black | bucket    | 5 kg           | 80 buckets |
| 8067 | Black | bucket    | 20kg           | 33 buckets |



## 3.6 ACCESSORIES FOR WATERPROOFING

### PP TAPE 120 MM - 50 M

Polypropylene reinforcement tape with side perforations



| Code  | Packaging size | Pallet    |
|-------|----------------|-----------|
| 15207 | 50 m           | 100 rolls |



### BU TAPE

Butyl reinforcement tape.

- Self-adhesive
- Easy peel
- Solvent free
- Heat stable
- For flexible joint sealing in a tile and plate system - suitable for water exposure classes W0-W2 according to DIN 18534



| Code  | Dimensions | Packaging | Packaging size | Pallet        |
|-------|------------|-----------|----------------|---------------|
| 15208 | 100 mm     | roll      | 15 m           | 36 cardboards |



**SHOWER TAPE 120 MM - 10 M**

Self-adhesive shower/bathtub connection tape.



| Code  | Color                                                                                  | Dimensions | Packaging size | Pallet    |
|-------|----------------------------------------------------------------------------------------|------------|----------------|-----------|
| 15218 |  Grey | 120 mm     | 10 m           | 500 rolls |

**CORNER TISSUE 90°**


Reinforcement tissue for closed corners.



| Code  | Packaging size | Pallet     |
|-------|----------------|------------|
| 15209 | 25 piece       | 250 pieces |

**CORNER TISSUE 270°**

Reinforcement tissue for open corners.



| Code  | Packaging size | Pallet     |
|-------|----------------|------------|
| 15210 | 25 piece       | 250 pieces |



**FLOOR COLLAR**


Self-adhesive butyl collar for floor drains.



| Code  | Color                                                                                  | Packaging | Packaging size | Pallet     |
|-------|----------------------------------------------------------------------------------------|-----------|----------------|------------|
| 15214 |  Grey | cartboard | 25 piece       | 250 pieces |

**MAT 1000 MM - 30 M**


Waterproof membrane.



| Code  | Dimensions | Packaging size | Pallet   |
|-------|------------|----------------|----------|
| 15215 | 1000 mm    | 30 m           | 33 rolls |

**BAND 140 MM**

Waterproof membrane in tape format.



| Code  | Dimensions | Packaging size | Pallet    |
|-------|------------|----------------|-----------|
| 15216 | 140 mm     | 10 m           | 250 rolls |



**BRIDGE MAT 1000 MM - 50 M**

Desolarizing waterproof membrane.



| Code  | Dimensions | Packaging | Packaging size | Pallet   |
|-------|------------|-----------|----------------|----------|
| 15217 | 1000 mm    | roll      | 50 m           | 20 rolls |

**SAFE TAPE 40 MM - 10 M**

Cut-resistant tape.



| Code  | Dimensions | Packaging size | Pallet    |
|-------|------------|----------------|-----------|
| 15219 | 40 mm      | 10 m           | 500 rolls |

**FLEX PIPE COLLAR 93 - 146**

Collar for through-hose with flexible reinforcement.



| Code  | Detail    | Packaging | Packaging size | Pallet     |
|-------|-----------|-----------|----------------|------------|
| 15213 | 93-146 mm | cartboard | 25 piece       | 250 pieces |



**FLEX PIPE COLLAR 50 - 75**

Collar for through-hose with flexible reinforcement.



| Code  | Packaging size | Pallet     |
|-------|----------------|------------|
| 15212 | 25 piece       | 250 pieces |

**FLEX PIPE COLLAR 22 - 37**

Collar for through-hose with flexible reinforcement.



| Code  | Packaging size | Pallet     |
|-------|----------------|------------|
| 15211 | 25 piece       | 250 pieces |

**NON WOVEN TISSUE NT 50**

| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15175 | 1000 mm    | roll      | 4x50 m         |



BLACK HYDRO TEX



| Code  | Color                             | Dimensions | Packaging |
|-------|-----------------------------------|------------|-----------|
| 15529 | <div><div></div>Light green</div> | 100 m      | roll      |



8030334155291



## 4. Flooring



## 4. FLOORING

### FAST SCREED

Pre-mixed, fast setting and hardening cementitious mortar class CT C30 F6 according to EN 13813, for floating or adherent screeds. For internal and external use.

- Controlled shrinkage
- Can be applied by hand or using a mortar pump
- Rapid application, drying and development of mechanical resistances
- Easy to work with and can be walked on quickly
- Ideal for heating floor realizations

Consumption: 18 kg/m<sup>2</sup>/cm



| Code  | Color                                                                                  | Packaging | Packaging size | Pallet  |
|-------|----------------------------------------------------------------------------------------|-----------|----------------|---------|
| 15182 |  Grey | bag       | 25 kg          | 54 bags |



### LIVELLINA 0-10

Self-levelling screed for irregular surfaces, up to 10 mm thickness, also for heated floors.

- Self-levelling
- High resistance
- Fast setting
- For indoor use
- Up to 10 mm thickness

Consumption: 1,6 kg/m<sup>2</sup>/mm



| Code | Color                                                                                    | Packaging | Packaging size | Pallet  |
|------|------------------------------------------------------------------------------------------|-----------|----------------|---------|
| 6716 |  Grey | bag       | 22 kg          | 50 bags |



### LIVELLINA 5-30

Self-levelling screed for irregular surfaces, from 5 to 30 mm thickness, also for heated floors.

- Self-levelling
- High resistance
- Fast setting
- For indoor use
- Thickness from 5 to 30 mm

Consumption: 18 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6963 | Grey  | bag       | 25 kg          | 50 bags |



### LIVELLINA HS

Self-levelling, quick hardening, cementitious screed with very low emissions particularly suitable for underfloor heating and for the equalisation of substrates with thickness from 5 to 40 mm.

- Self-levelling and fibre-reinforced
- Suitable for manual and machine application
- High strength
- Indoor use
- Thickness achievable in a single application from 5 to 40 mm
- Thickness above the pipe minimum 5 mm

Consumption: 18 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5439 | Grey  | bag       | 25 kg          | 50 bags |



## MULTIMIX EVO

Quick-setting pre-mixed and fibre-reinforced mortar for restoration, renovation and levelling work both on façades and floors in thickness from 3 to 50 mm. Good adhesion and excellent workability. For manual and machine applications.

- Excellent adhesion to multiple substrates
- After two hours tiles can be applied and can be walked over
- Excellent workability
- Use both horizontally and vertically

Consumption: 14 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5454 | Grey  | bag       | 25 kg          | 50 bags |



8030334054549

## FLOORREP

Self-levelling rapid cement mortar for repairing industrial floors with thickness of 3 mm to 30 mm.

- Excellent adhesion to the surface
- High mechanical resistance
- For indoor use

Consumption: 20 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6704 | Grey  | bag       | 25 kg          | 50 bags |



8030334067044

## QUARZ

Pre-mixed anti-wear dry-shake finish for industrial floors, class CT-C70-F7-AR1 according to EN 13813 - material for cement-based screeds for use inside buildings.

Consumption: 4 - 6 kg/m<sup>2</sup>




| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6390 | Grey  | bag       | 25 kg          | 50 bags |



8030334063909



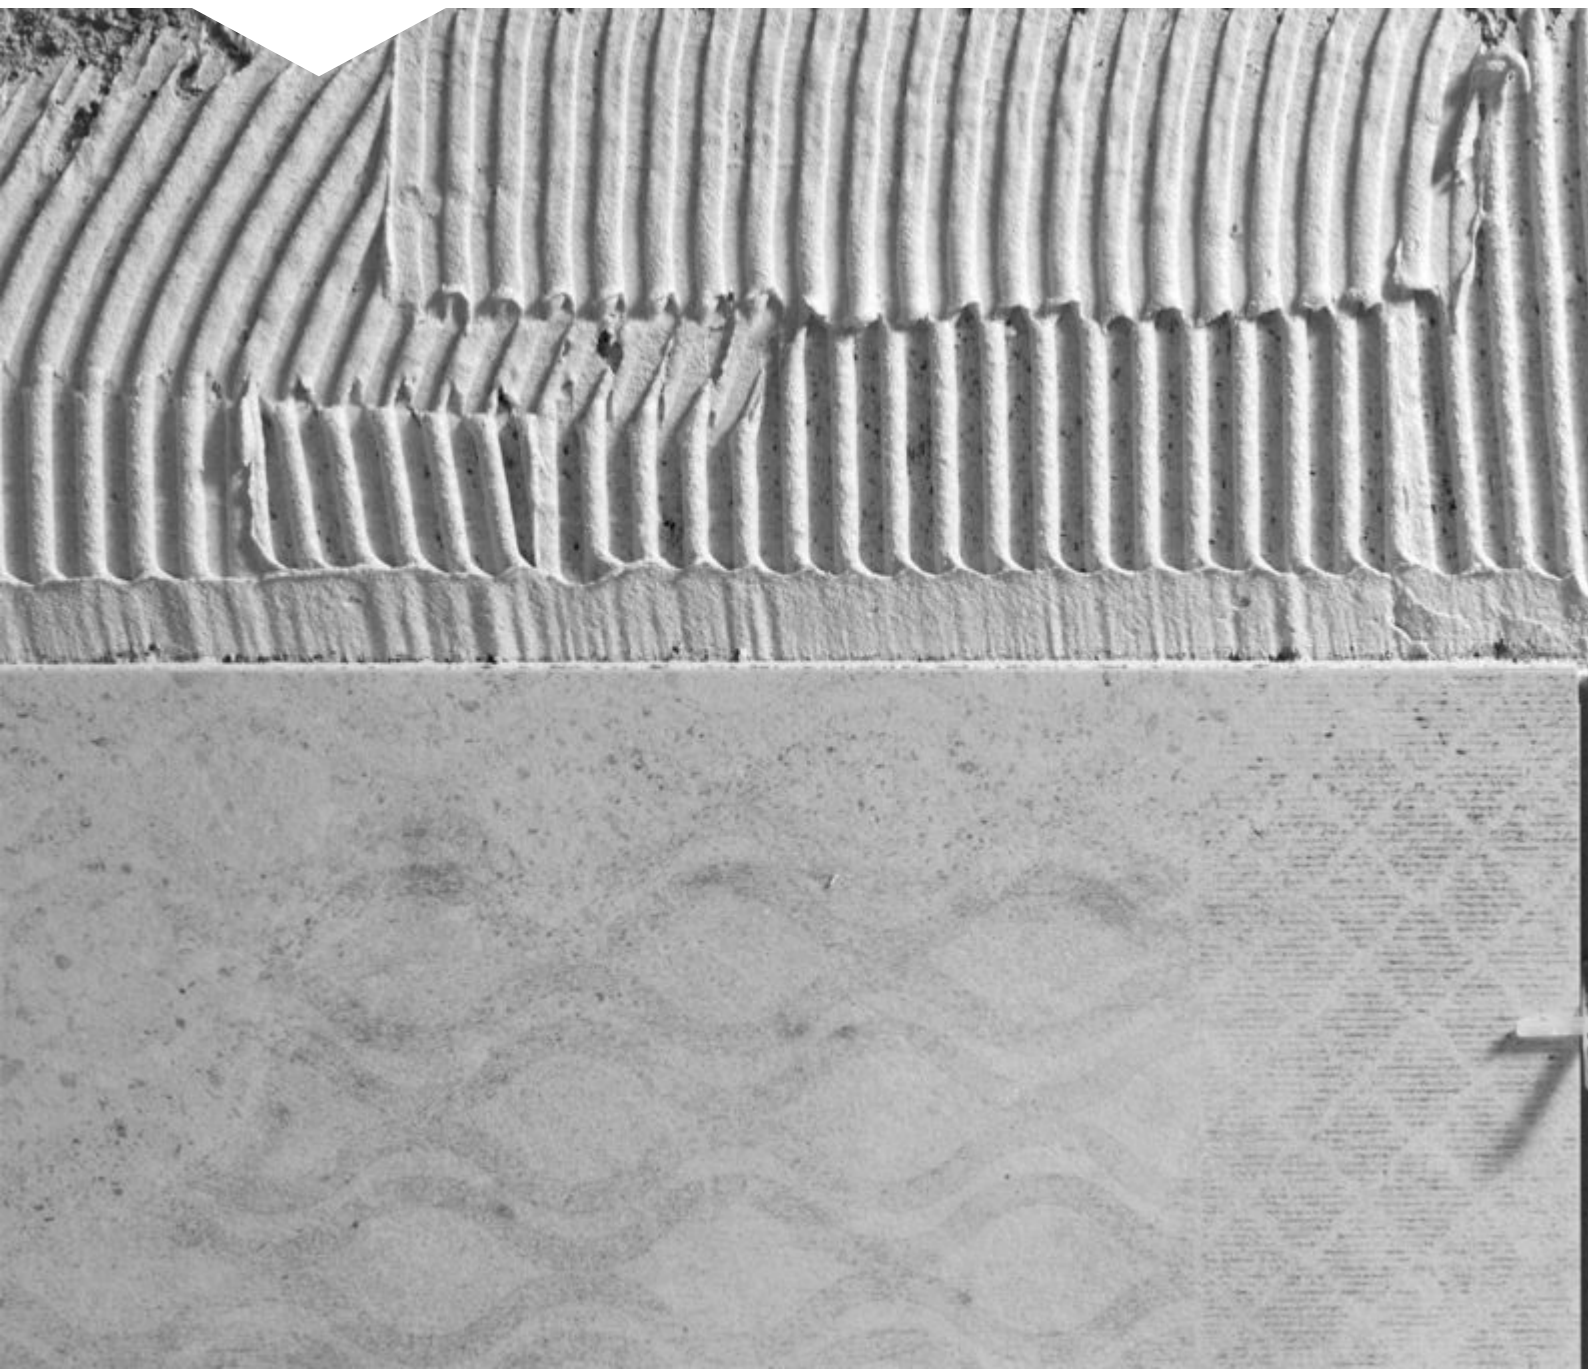


# 5. Tiles and Natural Stone Installation

5.1 Primers and Detergents

5.2 Tile Adhesives

5.3 Tile Grouts

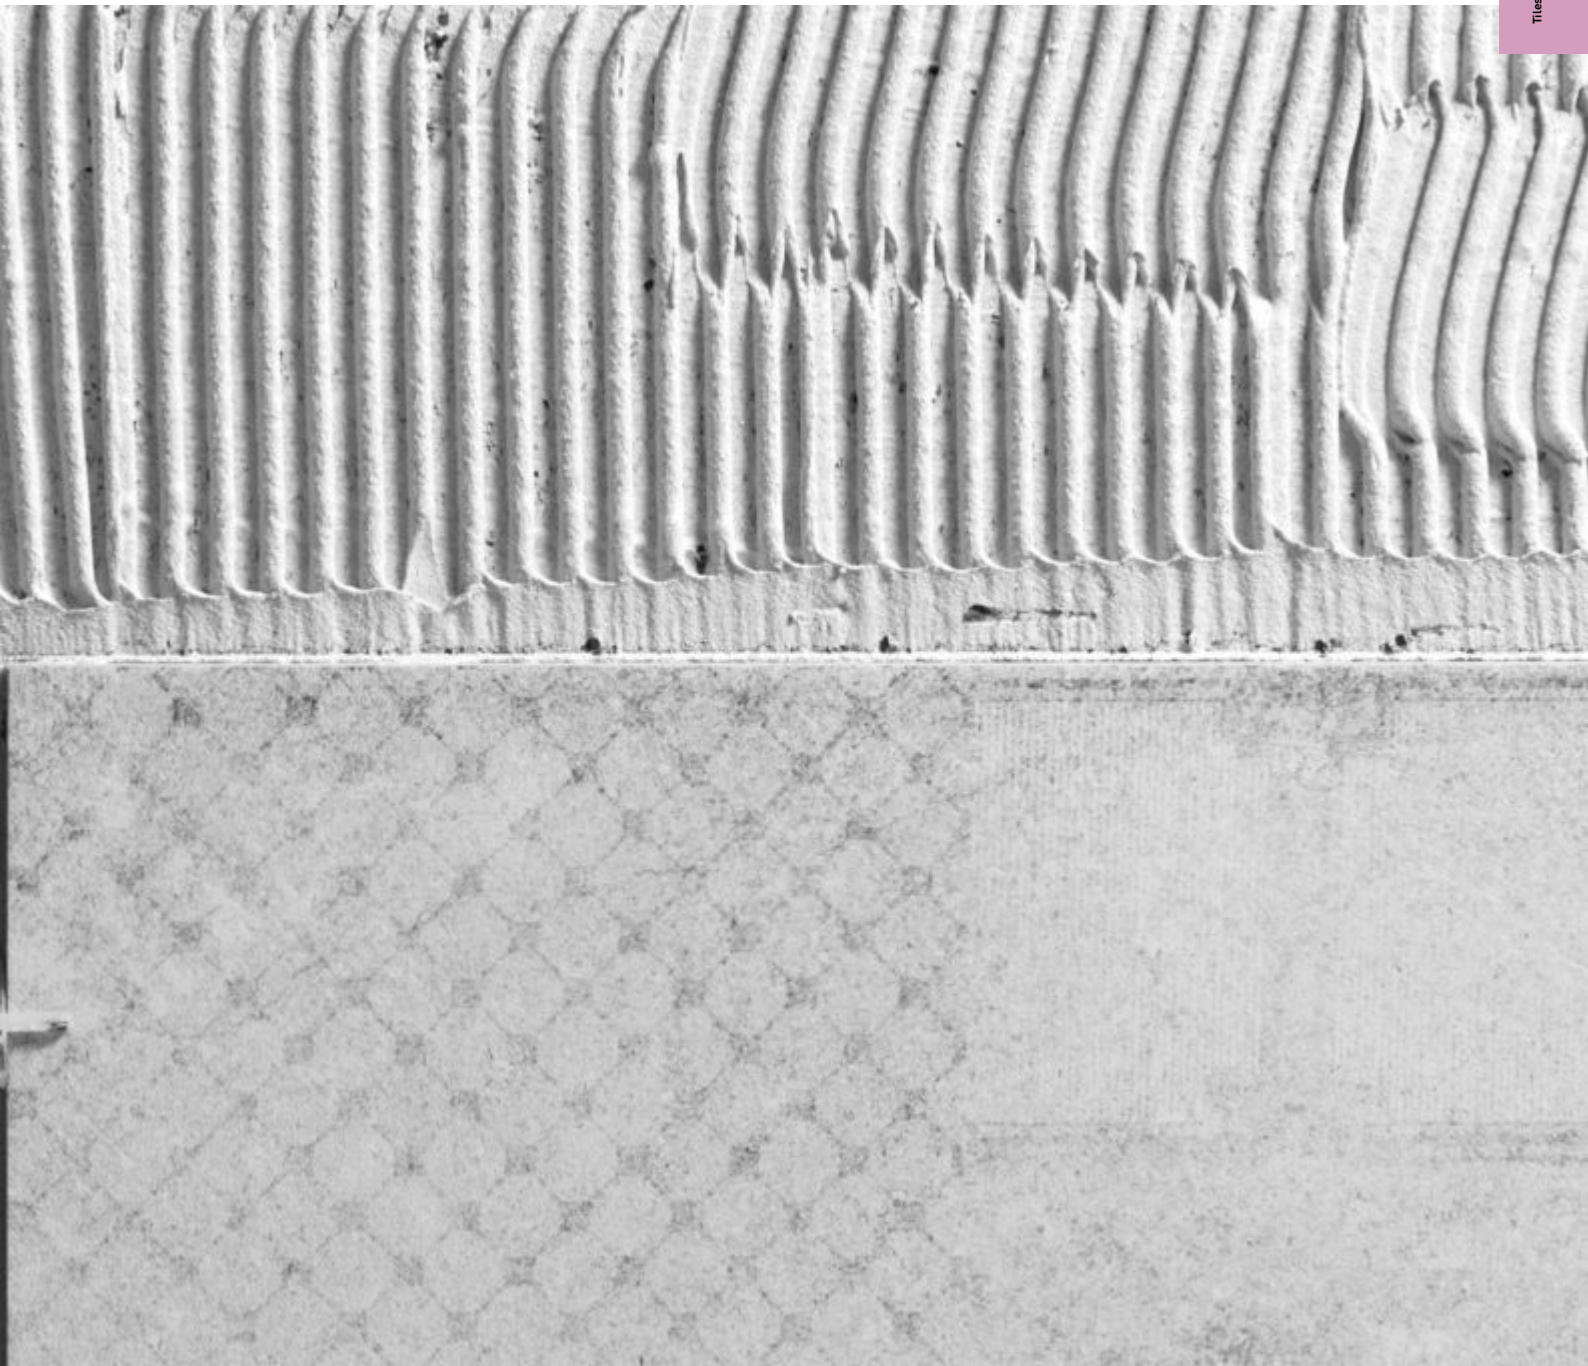

## 5.1 PRIMERS AND DETERGENTS

### MULTIGRIP

Multigrip is a single component, adhesion promoting primer, based on a styrene-acrylic resin water based emulsion and selected aggregates.

- Improves adhesion even on smooth or not very absorbent substrates
- Primes surfaces so cementitious adhesives can be applied on gypsum substrates
- Ready to use
- Solvent free

Consumption: 0,3 - 0,5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet     |
|------|-------|-----------|----------------|------------|
| 5278 | Grey  | bucket    | 5 kg           | 72 buckets |
| 5522 | Grey  | bucket    | 15 kg          | 33 buckets |



### TILE PRIMER

Improved adhesion, absorption and insulation pretreatment for the installation of tiles on gypsum, anhydrite and cementitious substrates.

- High insulating capacity
- Good adhesion
- Easy to apply
- Solvent free
- Dilutable with water
- Extends the open time of adhesives
- Prevents bubble formation
- Prevents shrinkage cracks

For consumption see technical data sheet.



| Code | Color      | Packaging | Packaging size | Pallet     |
|------|------------|-----------|----------------|------------|
| 5520 | Bright red | canister  | 5 kg           | 128 pieces |



**FLEX**

Flexibilizing agent for Aquaproof and cementitious adhesives.

For consumption see technical data sheet.



| Code | Color                                                                                   | Packaging | Packaging size | Pallet    |
|------|-----------------------------------------------------------------------------------------|-----------|----------------|-----------|
| 6056 |  White | canister  | 10kg           | 60 pieces |



8030334060564

**TILE CLEANER**

Acid detergent for ceramic tiles.



| Code | Packaging | Packaging size | Pallet     |
|------|-----------|----------------|------------|
| 6091 | canister  | 6kg            | 128 pieces |



8030334060915

**TILE EPOXY CLEANER**

Special cleaner for epoxy grouts.

- Strong
- Fast
- Clean and shiny result



| Code | Packaging | Packaging size | Pallet        |
|------|-----------|----------------|---------------|
| 5564 | bottle    | 8x750 ml       | 46 cardboards |



8030334055645

## 5.2 TILE ADHESIVES

### TILE 2020

Highly deformable, quick-setting, lightened cementitious adhesive for tiles, porcelain stoneware, stones and large marble.

Consumption: 3,3 kg/m<sup>2</sup>/double coating



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5452 | White | bag       | 15 kg          | 50 bags |
| 5453 | Grey  | bag       | 15 kg          | 50 bags |



### TILE 900

One-component cementitious adhesive, type C2 E according to EN 12004, flexible and waterproof, for laying all types of ceramic tiles, including large tiles, for walls, floors and paving. Ideal indoors for waterproof applications in bathrooms and kitchens but also outdoors and on all kinds of substrates. Frost resistant.

- **Waterproofing**
- **Ideal for bathrooms and kitchens**
- **Laying of all types of tiles, including large sizes, on all types of substrate.**
- **Flexible**

Consumption: 1,5 - 3,5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5223 | Grey  | bag       | 25 kg          | 50 bags |



## TILE 700

Improved one-component cementitious adhesive type C2 E S1 according to EN 12004, quick setting and hardening, highly flexible and high strength, for gluing wall, floor and paving slabs or blocks of marble or natural stone and ceramic tiles of all kinds. Can be used indoors and outdoors. Frost resistant.

- For marble and natural stone
- Deformable
- Quick setting and hardening
- Floors laid ready for use almost immediately
- Does not cause blooming or rings
- Longer open time

Consumption: 3 - 8 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5222 | White | bag       | 25 kg          | 50 bags |



8030334052224

## TILE 600

Single-component, adhesive cement powder, type C2 FE to EN 12004, quick setting and hardening, flexible and high strength, for gluing over old tiles or surfaces. For indoor and outdoor applications. For ceramic wall and floor tiles of all types. Frost resistant.

- Designed specifically for overlaying
- Quick setting and hardening
- Rapid usability
- Very short wait time for grouting
- Long open time

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5360 | Grey  | bag       | 25 kg          | 50 bags |



8030334053603

## TILE 480

One-component, improved, high strength, cementitious adhesive, with long open time, deformable, class C2 TE S1 in compliance with EN 12004. For indoor and outdoor use on walls and floors, even for overlying, for porcelain and glazed stoneware and ceramic tiles of all types and sizes. Frost resistant.

- Ideal for large-sized tiles
- Very resistant
- Longer open time
- Very flexible and deformable

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5221 | White | bag       | 25 kg          | 50 bags |
| 5219 | Grey  | bag       | 25 kg          | 50 bags |



## TILE 350

Improved, single-component, cementitious tile adhesive, type C2 TE according to EN 12004. Anti-slip, flexible, high resistance. Can be used indoors and outdoors, for walls and floors, even over old tiles. Suitable for porcelain and glazed stoneware and all ceramic tiles. Frost resistant.

- Ideal for medium- and large-size tiles
- Extended open time
- Suitable for heating floors
- Suitable for laying over old tiles
- Suitable for mosaic tiles when mixed with one part Antol Flex

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 5326 | White | bag       | 4x5 kg         | 40 cardboards |
| 5327 | Grey  | bag       | 4x5 kg         | 40 cardboards |
| 5306 | White | bag       | 25 kg          | 50 bags       |
| 5307 | Grey  | bag       | 25 kg          | 50 bags       |



**TILE 250**

Improved, single-component, cementitious tile adhesive, type C2 TE according to EN 12004, antislip and flexible, for gluing porcelain or glazed tiles of medium size. Can be used indoors and outdoors, on walls and floors. Frost resistant.

- Extended open time
- High adhesion
- Anti-slip
- Suitable for porcelain or glazed tiles of medium size
- Gluing ceramic wall and floor tiles indoors and outdoors
- Gluing of ceramic tiles on stable substrates of limited size

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5304 | White | bag       | 25 kg          | 50 bags |
| 5305 | Grey  | bag       | 25 kg          | 50 bags |

**T 480** *EKOR*

A deformable cement adhesive for all sizes of porcelain stoneware tiles and glazed tiles. Even for overlap. For indoor and outdoor use also on substrates subject to movement.

- Ideal for large formats
- Can also be used for overlapping
- Flexible and deformable

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5448 | White | bag       | 25 kg          | 50 bags |
| 5450 | Grey  | bag       | 25 kg          | 50 bags |



**T 250** EKOR

Single-component powder cementitious tile adhesive, type C2 TE according to EN 12004, flexible, non-slip and with extended open time, for bonding all types of ceramic tiles of medium/small size, both indoors and outdoors, to walls and floors.

- Increased open time
- High adhesiveness
- Anti-slip

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5445 | White | bag       | 25 kg          | 50 bags |
| 5447 | Grey  | bag       | 25 kg          | 50 bags |



8030334054457



8030334054471

**T 50** EKOR

Cementitious adhesive for laying absorbent ceramic tiles, indoors and outdoors. Suitable for single-fired and double-fired ceramic materials and aerated concrete materials. It can also be used as thin-layer masonry mortar.

- Extended open time
- For bathrooms and kitchens
- For indoor and outdoor use

Consumption: 2 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5442 | White | bag       | 25 kg          | 50 bags |
| 5444 | Grey  | bag       | 25 kg          | 50 bags |



8030334054426



8030334054440

## 5.3 TILE GROUTS

### TILE GROUT 5-15 MM

Cement-based powder grout, classified as CG2 to UNI EN 13888, for filling joints 5 to 15 mm wide.

- Resistant to water and frost
- Ideal for swimming pools and terraces

For consumption see technical data sheet.



| Code | Color                                                                                             | Packaging | Packaging size | Pallet  |
|------|---------------------------------------------------------------------------------------------------|-----------|----------------|---------|
| 6928 |  220 Cement grey | bag       | 25 kg          | 50 bags |



### TILE EPOXY

Two-component epoxy mortar, class R2 T according to EN 12004 and class RG according to EN 13888, for the bonding and grouting up to 15 mm of ceramic, ceramic and glass mosaic, marble and natural stone elements.

- Excellent workability and easy clean-up
- High chemical and mechanical resistance
- Perfectly waterproof
- Maximum colour stability

For consumption see technical data sheet.



| Code  | Color                                                                                               | Bicomponent  | Packaging | Packaging size | Pallet      |
|-------|-----------------------------------------------------------------------------------------------------|--------------|-----------|----------------|-------------|
| 15189 |  001 Neutral     | 2 components | bucket    | 3kg            | 100 buckets |
| 15190 |  100 White       | 2 components | bucket    | 3kg            | 100 buckets |
| 15191 |  150 Jasmin      | 2 components | bucket    | 3kg            | 100 buckets |
| 15196 |  210 Bright grey | 2 components | bucket    | 3kg            | 100 buckets |
| 15197 |  240 Grey        | 2 components | bucket    | 3kg            | 100 buckets |
| 15198 |  290 Black       | 2 components | bucket    | 3kg            | 100 buckets |
| 15193 |  320 Bahama      | 2 components | bucket    | 3kg            | 100 buckets |
| 15194 |  380 Chestnut    | 2 components | bucket    | 3kg            | 100 buckets |



## TILE GROUT 2-15 MM

Cement based powder grout, single component, flexible and waterproof, classified as CG2 WA in compliance with EN 13888, for filling joints 2 to 15 mm wide.

- Single component
- Flexible
- Waterproof
- High resistance to abrasion
- Ideal for bathrooms and swimming pools
- Wide range of colours

For consumption see technical data sheet.



| Code | Color           | Packaging | Packaging size | Pallet        |                   |
|------|-----------------|-----------|----------------|---------------|-------------------|
| 5378 | 100 White       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053788 |
| 5379 | 150 Jasmin      | bag       | 4x5 kg         | 40 cardboards | <br>8030334053795 |
| 5380 | 200 Manhattan   | bag       | 4x5 kg         | 40 cardboards | <br>8030334053801 |
| 5381 | 205 Pearl grey  | bag       | 4x5 kg         | 40 cardboards | <br>8030334053818 |
| 5394 | 205 Pearl grey  | bag       | 25 kg          | 50 bags       | <br>8030334053948 |
| 5382 | 220 Cement grey | bag       | 4x5 kg         | 40 cardboards | <br>8030334053825 |
| 5395 | 220 Cement grey | bag       | 25 kg          | 50 bags       | <br>8030334053955 |
| 5383 | 230 Grey        | bag       | 4x5 kg         | 40 cardboards | <br>8030334053832 |
| 5384 | 260 Anthracite  | bag       | 4x5 kg         | 40 cardboards | <br>8030334053849 |
| 5385 | 290 Black       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053856 |
| 5386 | 310 Vanilla     | bag       | 4x5 kg         | 40 cardboards | <br>8030334053863 |
| 5387 | 320 Bahama      | bag       | 4x5 kg         | 40 cardboards | <br>8030334053870 |
| 5388 | 330 Beige       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053887 |
| 5389 | 340 Hazelnut    | bag       | 4x5 kg         | 40 cardboards | <br>8030334053894 |
| 5390 | 350 Brown       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053900 |
| 5391 | 360 Chocolate   | bag       | 4x5 kg         | 40 cardboards | <br>8030334053917 |
| 5392 | 370 Terracotta  | bag       | 4x5 kg         | 40 cardboards | <br>8030334053924 |
| 5393 | 380 Chestnut    | bag       | 4x5 kg         | 40 cardboards | <br>8030334053931 |

## TILE GROUT ≤8 MM


Cement-based powder grout, classified as CG2 WA in compliance with EN 13888, for rigid filling of joints up to 8 mm.

- Single component
- Waterproof
- High abrasion resistance
- Wide range of colours

For consumption see technical data sheet.



| Code | Color           | Packaging | Packaging size | Pallet        |                   |
|------|-----------------|-----------|----------------|---------------|-------------------|
| 5362 | 100 White       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053627 |
| 5363 | 150 Jasmin      | bag       | 4x5 kg         | 40 cardboards | <br>8030334053634 |
| 5364 | 200 Manhattan   | bag       | 4x5 kg         | 40 cardboards | <br>8030334053641 |
| 5365 | 205 Pearl grey  | bag       | 4x5 kg         | 40 cardboards | <br>8030334053658 |
| 5366 | 220 Cement grey | bag       | 4x5 kg         | 40 cardboards | <br>8030334053665 |
| 5367 | 230 Grey        | bag       | 4x5 kg         | 40 cardboards | <br>8030334053672 |
| 5368 | 260 Anthracite  | bag       | 4x5 kg         | 40 cardboards | <br>8030334053689 |
| 5369 | 290 Black       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053696 |
| 5370 | 310 Vanilla     | bag       | 4x5 kg         | 40 cardboards | <br>8030334053702 |
| 5371 | 320 Bahama      | bag       | 4x5 kg         | 40 cardboards | <br>8030334053719 |
| 5372 | 330 Beige       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053726 |
| 5373 | 340 Hazelnut    | bag       | 4x5 kg         | 40 cardboards | <br>8030334053733 |
| 5374 | 350 Brown       | bag       | 4x5 kg         | 40 cardboards | <br>8030334053740 |
| 5375 | 360 Chocolate   | bag       | 4x5 kg         | 40 cardboards | <br>8030334053757 |
| 5376 | 370 Terracotta  | bag       | 4x5 kg         | 40 cardboards | <br>8030334053764 |
| 5377 | 380 Chestnut    | bag       | 4x5 kg         | 40 cardboards | <br>8030334053771 |

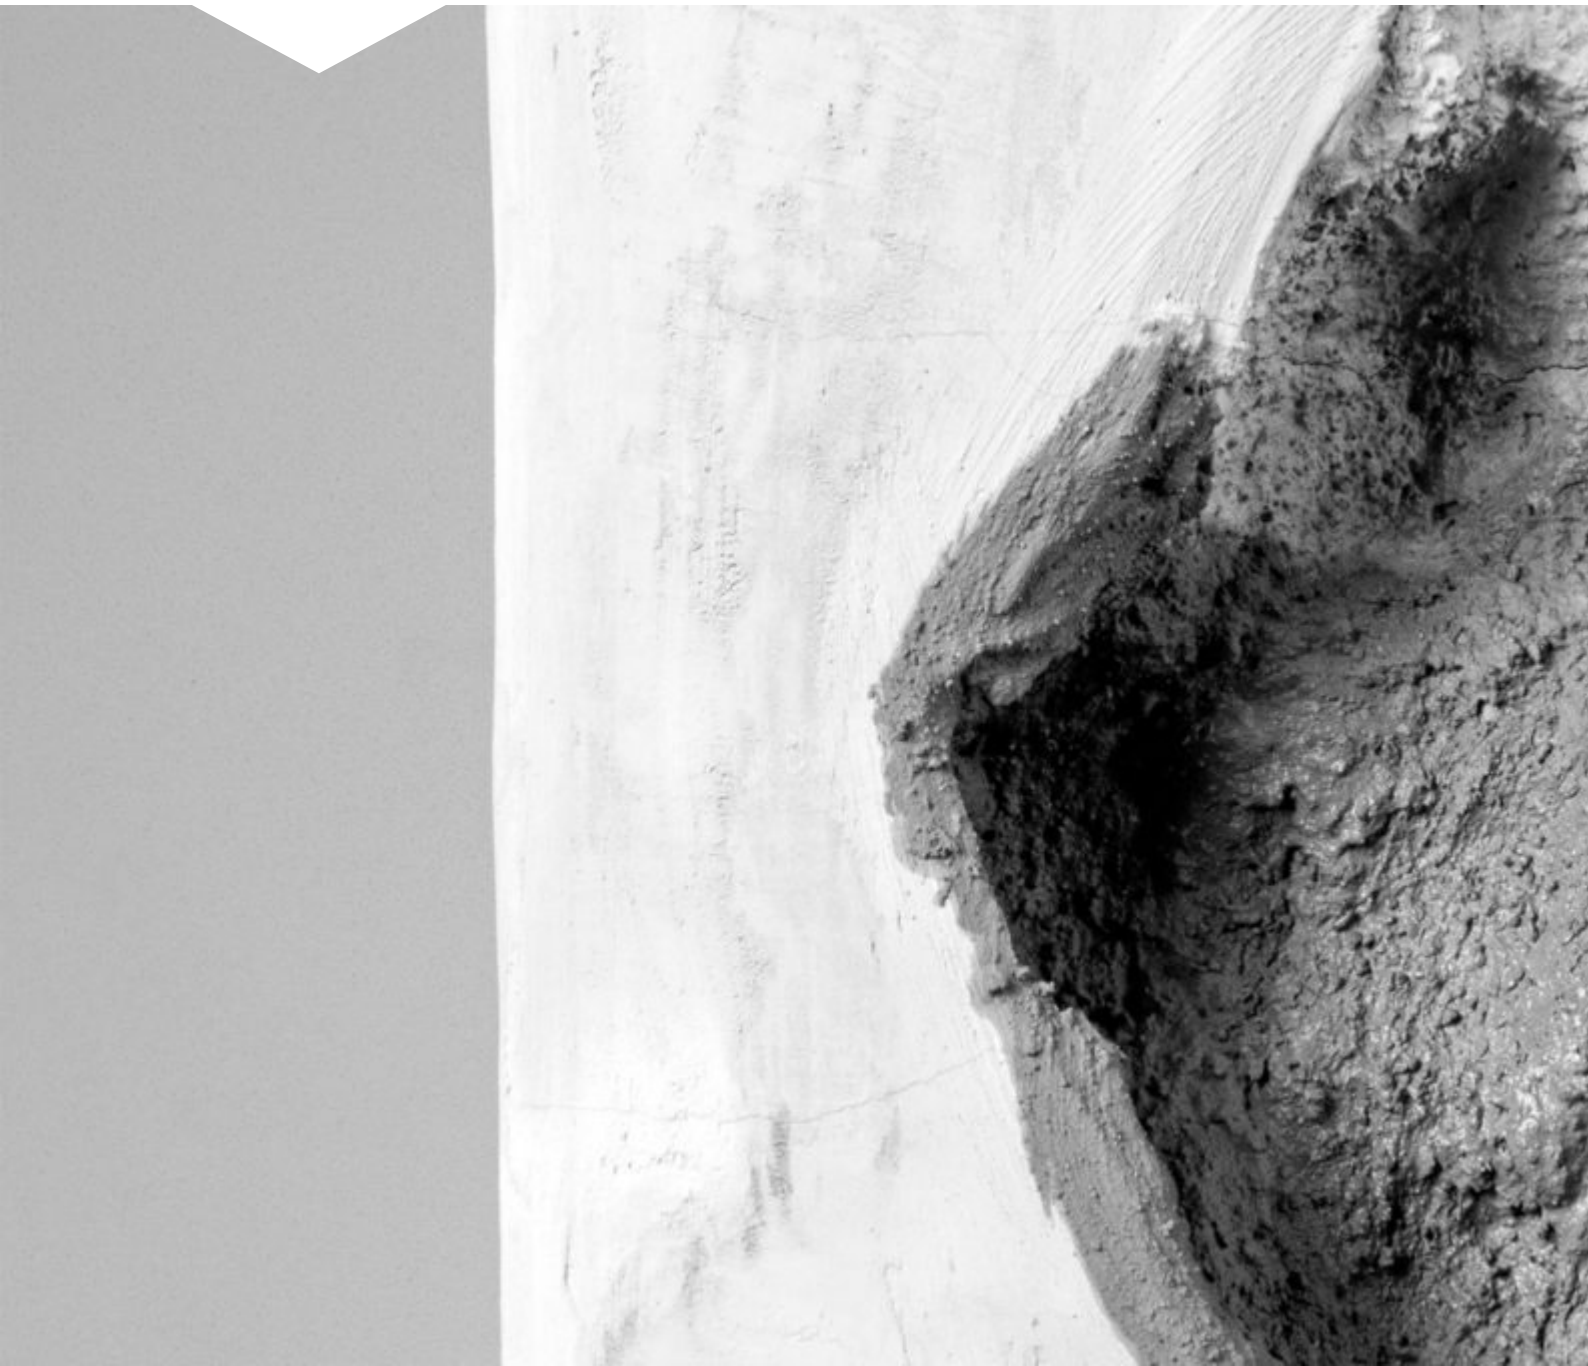


# 6. Concrete Restoration

6.1 Pretreatments

6.2 Cementitious Mortars

6.3 Paints

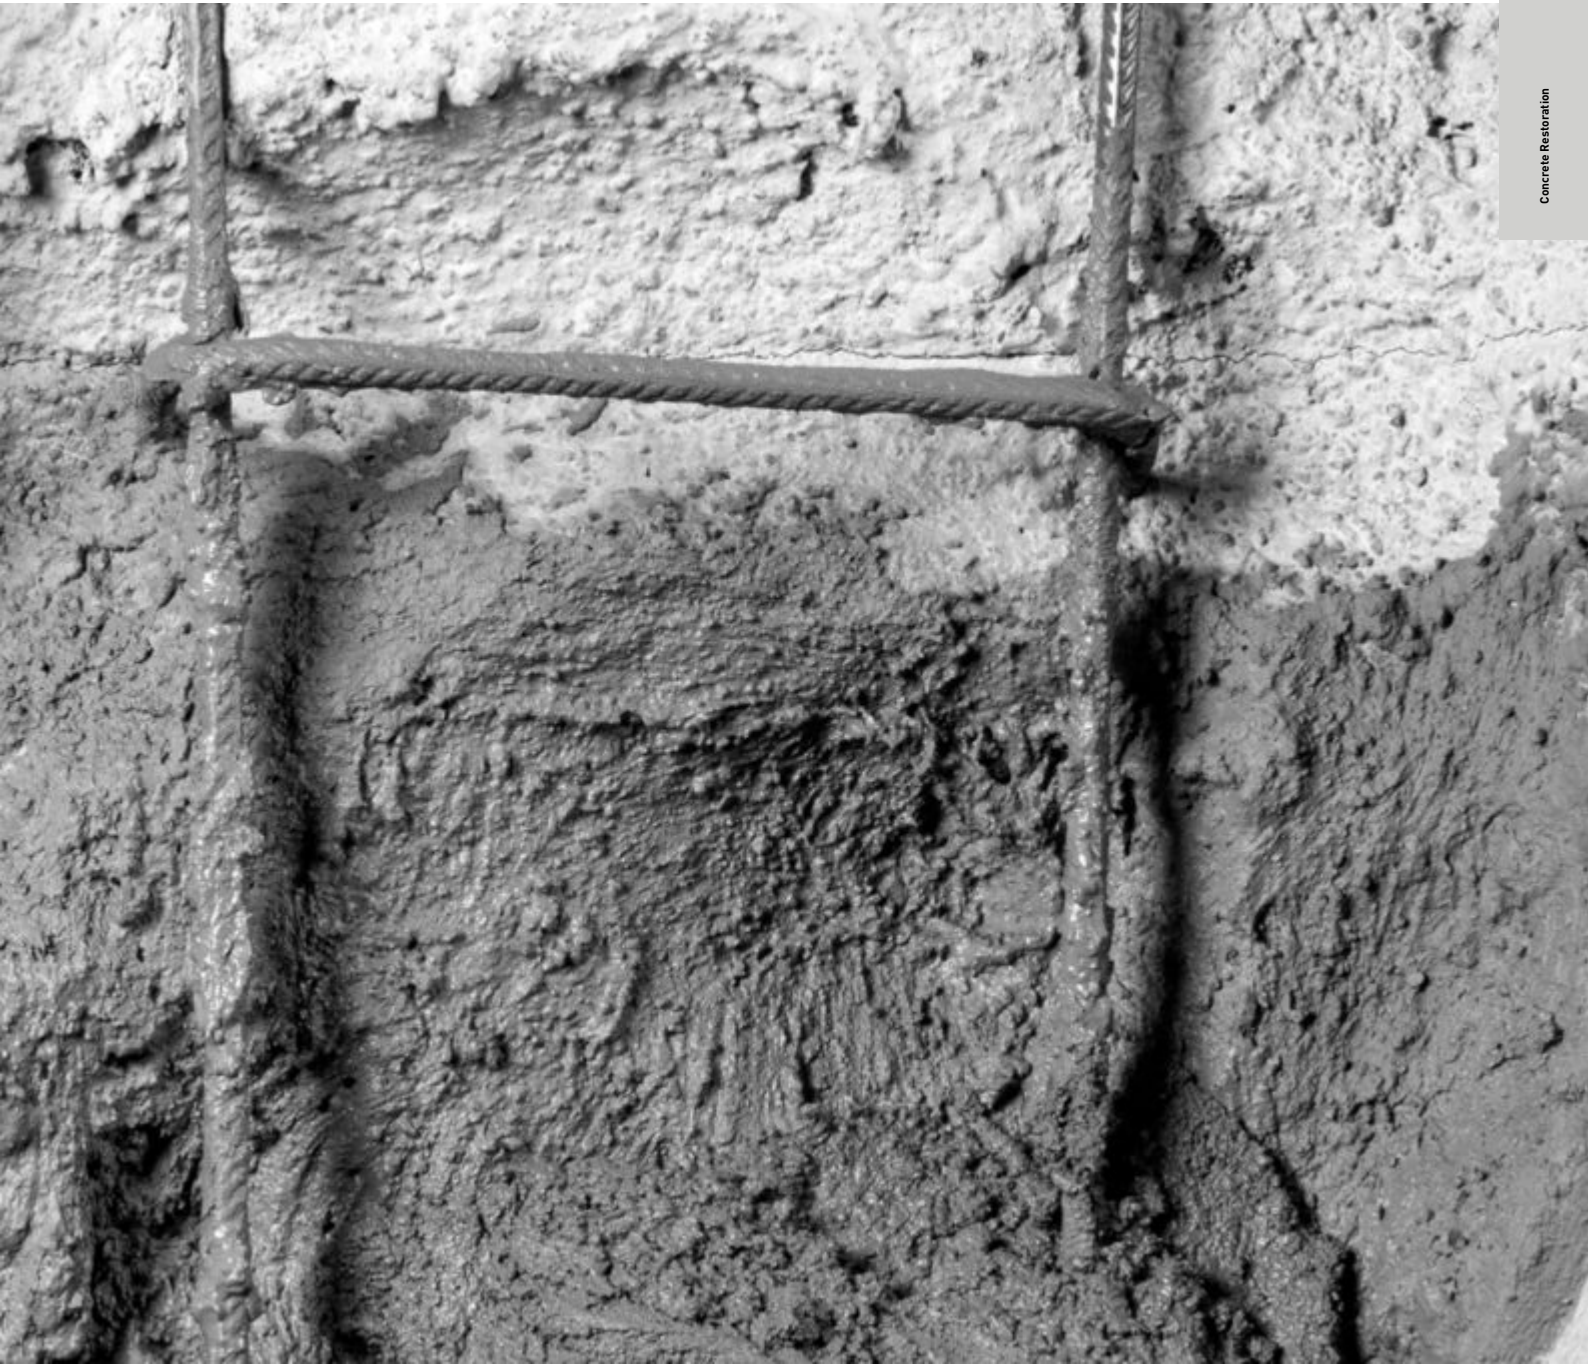

## 6.1 PRETREATMENTS

### RESTAURO FERRI

Single-component mortar for protective anticorrosive and CO<sub>2</sub> barrier treatment of rebars. It meets the minimum requirements of EN 1504-7.

- Exceptional adhesion to rebars and concrete
- High anti-CO<sub>2</sub> protection
- Extremely easy to apply
- It ensures the perfect adhesion of mortars to the substrate
- Excellent thixotropy

Consumption: 1,2 kg/m<sup>2</sup>/mm



| Code | Color       | Packaging | Packaging size | Pallet        |
|------|-------------|-----------|----------------|---------------|
| 5523 | Bright grey | bag       | 4x5 kg         | 40 cardboards |



8030334055232

## 6.2 CEMENTITIOUS MORTARS

### RESTAURO R4

Premixed, single-component, anti-shrinkage, normal setting, pre-mixed mortar for concrete and reinforced concrete reconstruction and protection, PCC type and class R4 according to EN 1504-3.

- High mechanical strength
- Excellent thixotropy
- Anti-shrinkage
- Applicable in thickness between 10 and 40 mm

Consumo: 19 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5525 | Grey  | bag       | 25 kg          | 50 bags |



8030334055256

### RESTAURO R3

Premixed, single-component, anti-shrinkage, semi-rapid, pre-mixed mortar for concrete and reinforced concrete reconstruction and protection, PCC type and class R3 according to EN 1504-3.

- High mechanical strength
- Great thixotropy
- Anti-shrinkage
- Applicable in thickness between 10 and 40 mm
- Manually and mechanically applicable

Consumo: 19 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5524 | Grey  | bag       | 25 kg          | 50 bags |



### RESTAURO R2

Premixed fast setting thixotropic mortar, uni en 1504-3 pcc type and r2 class, resin-bonded and fibre-reinforced, for reconstruction of concrete.

- Exceptional workability
- Excellent mechanical strength
- Applicable in layers 10 to 40 mm thick
- Fast setting product
- Low modulus of elasticity

Consumo: 19 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6312 | Grey  | bag       | 25 kg          | 50 bags |



## STRUTTURALE

Premixed, high-strength thixotropic mortar, fibre-reinforced, EN 1504-3 CC type and R4 class, for the reconstruction of structural components.

- High mechanical strength
- Excellent thixotropy
- Anti shrinkage
- Applicable in coats between 20 and 40 mm thick

Consumo: 19 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6314 | Grey  | bag       | 25 kg          | 50 bags |



8030334063145

## COLABILE

Premixed, high-strength, fibre-reinforced mortar, UNI EN 1504-3 PCC type and R4 class, applicable by casting in formwork for the reconstruction of structural components.

- High mechanical strength
- Excellent rheological properties
- Anti shrinkage
- Anti bleeding and anti sedimentation

Consumo: 2000 kg/m<sup>3</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6300 | Grey  | bag       | 25 kg          | 50 bags |



8030334063008

## RESTAURO FINITURA

Premixed, single-component, resin-bonded, fibre-reinforced, class C MC IR fine mortar according to EN 1504-2 for smoothing and protecting concrete elements.

- Outstanding workability and adhesion to the substrate
- Excellent mechanical strength and surface hardness
- Reduced capillary absorption
- Resistant to CO<sub>2</sub> penetration
- Applicable in thickness from 1 to 3 mm
- Perfect degree of finish

Consumo: 1,7 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5527 | Grey  | bag       | 25 kg          | 50 bags |



## RINNOVA

Quick-setting, single-component premixed mortar. Thixotropic, non-shrink, fibre-reinforced. Type PCC and class R2 as per 1504-3 and type C, MC and IR principles, as per UNI EN 1504-2. For smoothing and repairing concrete.

- Excellent workability
- Excellent finish
- Quick setting
- Non-shrink
- Applicable in thicknesses up to 40 mm

Consumo: 1,8 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 5325 | Grey  | bag       | 4x5 kg         | 40 cardboards |
| 5088 | Grey  | bag       | 25 kg          | 50 bags       |



## UMAFIX

Premixed cement mortar, thixotropic, fast-setting and hardening and with high mechanical strength for various type of reparation.

- Quick setting and hardening
- High mechanical strength
- Extremely versatile in a wide range of applications
- Fast to prepare and use
- Use in thicknesses from 0 to 40 mm
- Perfect construction engineering finish

Consumo: 18 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 6046 | Grey  | bag       | 25 kg          | 50 bags       |
| 6045 | Grey  | bag       | 4x5 kg         | 40 cardboards |



## UMATIXO

One-component, pre-mixed thixotropic cement mortar. Fast setting and hardening times fibre-reinforced with high mechanical strength, type CC and class R4 according to EN 1504-3, for fixing manhole covers, localised repair of interior and exterior industrial floors and repair of reinforced concrete.

- Rapid hardening and development of mechanical strength
- Excellent water impermeability
- Resistant to the penetration of CO<sub>2</sub>
- Withstands freezing/thawing cycles
- Resistant to thawing salts

Consumo: 20 kg/m<sup>2</sup>/cm



| Code | Color      | Packaging | Packaging size | Pallet  |
|------|------------|-----------|----------------|---------|
| 5134 | Anthracite | bag       | 25 kg          | 50 bags |



## UMAFLOW

One-component, pre-mixed, fluid, non-shrinking, fibre-reinforced, fast setting and hardening mortar with high mechanical strength. Type CC and class R4 according to EN 1504-3, for fixing manhole covers, localised repair of interior and exterior industrial floors and repair of reinforced concrete.

- **Rapid hardening and development of mechanical strength**
- **Resistant to the penetration of CO<sub>2</sub>**
- **Withstands freezing/thawing cycles**
- **Resistant to thawing salts**

Consumo: 21 kg/m<sup>2</sup>/cm



| Code | Color      | Packaging | Packaging size | Pallet  |
|------|------------|-----------|----------------|---------|
| 5081 | Anthracite | bag       | 25 kg          | 50 bags |
| 5080 | Grey       | bag       | 25 kg          | 50 bags |



## 6.3 PAINTS

### RESTAURO PITTURA

Smooth anti-carbonation paint specifically for concrete.

- **Anti CO**
- **Uniforming**
- **Protective**

Consumption per coat: 10-14 m<sup>2</sup>/l



| Code | Color    | Packaging | Packaging size | Pallet      | Price Class |
|------|----------|-----------|----------------|-------------|-------------|
| 8232 | White    | bucket    | 15l            | 33 buckets  | -           |
| 8277 | Coloured | bucket    | 1 l            | 216 buckets | Sample      |
| 8273 | Coloured | bucket    | 15l            | 33 buckets  | PC I        |
| 8274 | Coloured | bucket    | 15l            | 33 buckets  | PC II       |
| 8275 | Coloured | bucket    | 15l            | 33 buckets  | PC III      |
| 8276 | Coloured | bucket    | 15l            | 33 buckets  | PC ◆        |






# 7. Anchoring and Mounting

7.1 Chemical Anchors

7.2 Epoxy Adhesives

7.3 Cementitious Mortars

7.4 Accessories

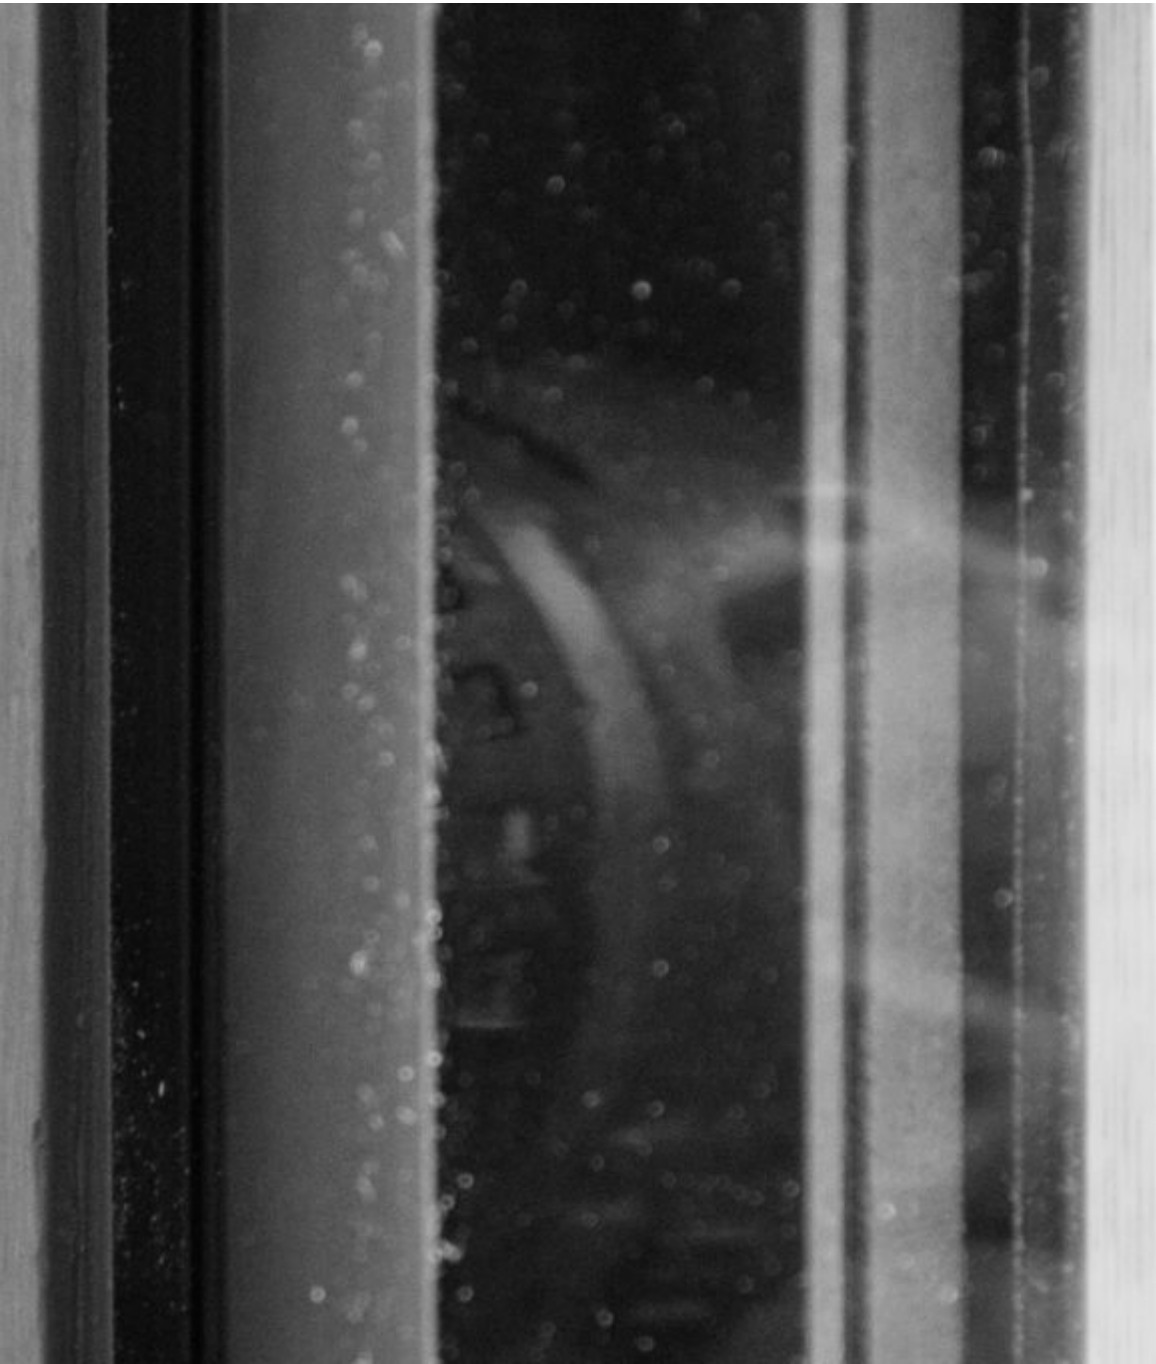

## 7.1 CHEMICAL ANCHORS

### XTREME GRIP VINYLESTER

Two-component vinylester resin-based chemical anchor without styrene for structural fixings on cracked/un-cracked concrete, solid and perforated brick masonry, wood.

- CE marked and qualified according to the European Technical Assessment (ETA) for anchors on cracked and non-cracked concrete
- Certified for works in seismic category C1 and C2.
- Also suitable for fixings on hollow elements, solid masonry and timber
- Quick commissioning
- Suitable for use on wet substrates or with flooded hole
- Substrate temperatures during installation: from -10 °C to +40 °C
- Fire resistant up to maximum R240
- Possibility of sinking the anchoring hole to a depth of up to 1 metre
- Easy penetration into porous and hollow areas
- Secure fastening without expansion and without tension in the substrate

For consumption see technical data sheet.



| Code | Bicomponent  | Packaging | Packaging size | Pallet        |
|------|--------------|-----------|----------------|---------------|
| 8051 | 2 components | cartridge | 12x300 ml      | 52 cardboards |
| 8052 | 2 components | cartridge | 12x400 ml      | 72 cardboards |



### CA POLY EKOR

Two-component polyester resin-based chemical anchor without styrene for fixing medium-light loads on un-cracked concrete, solid and perforated brick masonry and autoclaved cell concrete.

For consumption see technical data sheet.



| Code | Bicomponent  | Packaging | Packaging size | Pallet        |
|------|--------------|-----------|----------------|---------------|
| 8047 | 2 components | cartridge | 12x300 ml      | 52 cardboards |
| 8048 | 2 components | cartridge | 12x400 ml      | 72 cardboards |



## 7.2 EPOXY ADHESIVES

### EPOX RIPRESA

Two-component epoxy adhesive for concrete casting joints.

- Slightly thixotropic
- Water-based product

The consumption of Epox Ripresa is approx. 600-800 g/m<sup>2</sup>



| Code | Color                                                                                    | Bicomponent  | Packaging | Packaging size |
|------|------------------------------------------------------------------------------------------|--------------|-----------|----------------|
| 5486 |  Yellow | 2 components | bucket    | 4x3 kg         |



## 7.3 CEMENTITIOUS MORTARS

### FLASH

Extra-fast setting, premixed cementitious mortar for small installation works.

- Thixotropic
- Ideal for electrical and hydraulic installations
- Prefect construction engineering finishing
- Extra fast setting

Consumption: 18 kg/l



| Code | Color                                                                                    | Packaging | Packaging size | Pallet        |
|------|------------------------------------------------------------------------------------------|-----------|----------------|---------------|
| 6040 |  Grey | bag       | 4x5 kg         | 40 cardboards |
| 6041 |  Grey | bag       | 25 kg          | 50 bags       |



## ESPANSOL ANCOR

Pre-mixed, fluid, self-levelling cementitious mortar for anchoring and precise grouting works.

- Fluid
- Extremely high resistance
- Limited expansion
- Non-shrinking

Consumption: 2100 kg/m<sup>3</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6032 | Grey  | bag       | 25 kg          | 50 bags |



8030334060328

## 7.4 ACCESSORIES

### CHEMICAL ANCHOR CAGE

Cage for application of chemical anchors on perforated bricks in combination with threaded rods of different size. Hole diameter 12 mm and hole length 80 mm; hole diameter 15 mm and hole length 85 mm; hole diameter 20 mm and hole length 85 mm.



| Code  | Detail  | Dimensions | Packaging size |
|-------|---------|------------|----------------|
| 15254 | M8      | 12x80 mm   | 100 piece      |
| 15255 | M10-M12 | 15x85 mm   | 100 piece      |
| 15256 | M12-M16 | 20x85 mm   | 50 piece       |



8030334152542



8030334152559



8030334152566

## WINDOW FRAME SCREW FOR ALUMINIUM

Special screw made of galvanised steel for fixing aluminium profiles on concrete, with high-low thread, reduced cylinder head, TX30 drive and various lengths from 50 to 300 mm.



| Code  | Dimensions | Thickness | Packaging size |                                                                                                        |
|-------|------------|-----------|----------------|--------------------------------------------------------------------------------------------------------|
| 15396 | 100 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334153969   |
| 15397 | 110 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334153976   |
| 15398 | 120 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334153983   |
| 15399 | 135 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334153990   |
| 15400 | 150 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154003   |
| 15401 | 160 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154010   |
| 15402 | 180 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154027   |
| 15403 | 200 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154034 |
| 15404 | 220 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154041 |
| 15391 | 50 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334153914 |
| 15392 | 60 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334153921 |
| 15393 | 70 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334153938 |
| 15394 | 80 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334153945 |
| 15395 | 90 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334153952 |
| 15406 | 300 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154065 |

## WINDOW FRAME SCREW FOR PVC AND WOOD

Special screw made of galvanised steel for fixing PVC and wood profiles to concrete, with high-low thread, flat countersunk head, TX30 drive and various lengths from 50 to 300 mm.



| Code  | Dimensions | Thickness | Packaging size |                                                                                                        |
|-------|------------|-----------|----------------|--------------------------------------------------------------------------------------------------------|
| 15412 | 100 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154126   |
| 15414 | 110 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154140   |
| 15415 | 120 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154157   |
| 15416 | 135 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154164   |
| 15417 | 150 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154171   |
| 15418 | 160 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154188   |
| 15419 | 180 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154195   |
| 15420 | 200 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154201 |
| 15421 | 220 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154218 |
| 15423 | 300 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154232 |
| 15407 | 50 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334154072 |
| 15408 | 60 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334154089 |
| 15409 | 70 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334154096 |
| 15410 | 80 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334154102 |
| 15411 | 90 mm      | Ø 7,5 mm  | 100 piece      | <br>8030334154119 |
| 15422 | 250 mm     | Ø 7,5 mm  | 100 piece      | <br>8030334154225 |


CHEMICAL ANCHOR MIXER

Mixer for chemical anchors.



| Code  | Packaging | Packaging size |
|-------|-----------|----------------|
| 15253 | bag       | 12 piece       |



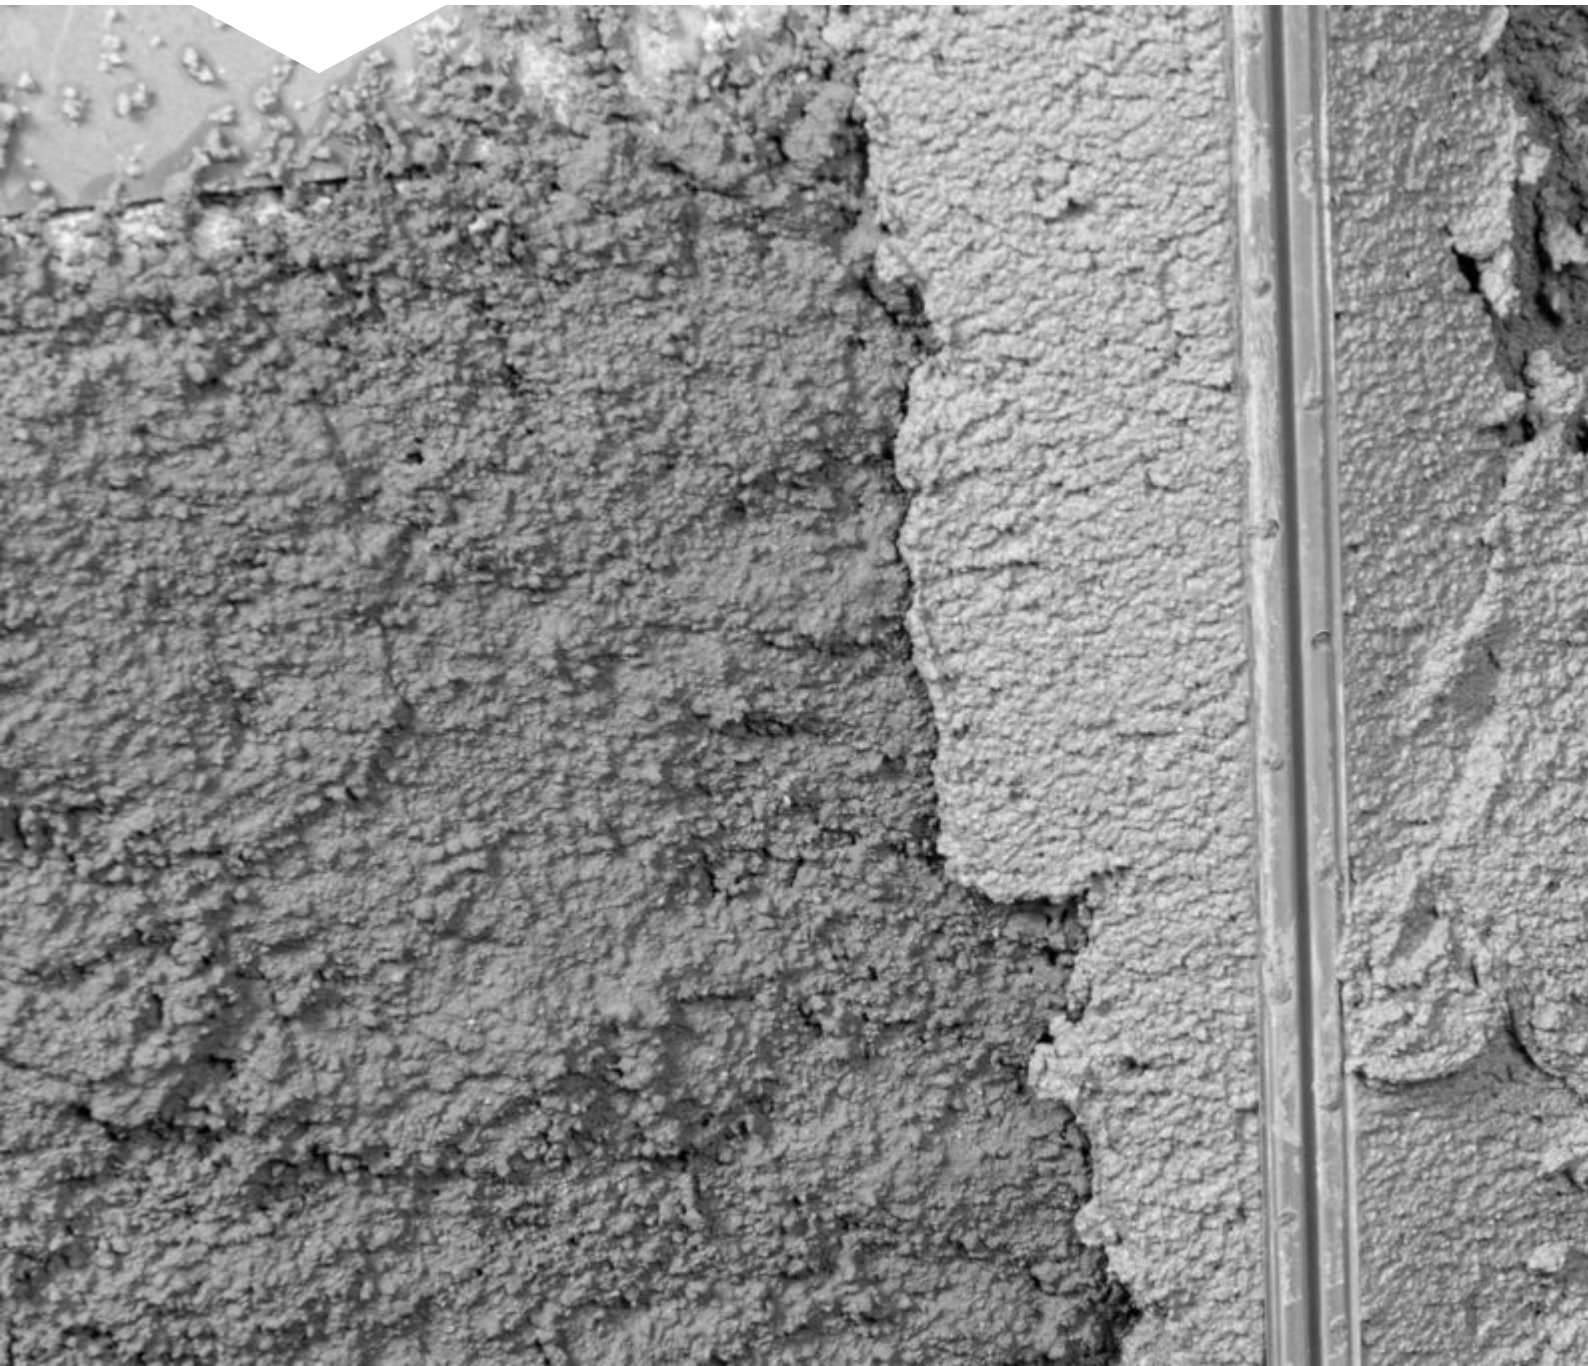

# 8. Restoration

8.1 Surface Preparation

8.2 Cementitious Dehumidification Mortars

8.3 Dehumidification Finishing Mortars

8.4 Renovation with Calcium Silicate Panels

8.5 Finishing Mortars for Facades and Walls



## 8.1 SURFACE PREPARATION

### RINZAFFO

Rendering coat for renovating and/or dehumidifying plasters.

- Perfect compatibility with renovating and/or dehumidifying plasters
- Good breathability
- Excellent workability
- Excellent adhesion on all types of masonry even when treated with Antisale
- Hand and machine application

Consumo: 1,4 - 1,6 kg/m<sup>2</sup>/mm



| Code | Color                                                                                  | Packaging | Packaging size | Pallet  |
|------|----------------------------------------------------------------------------------------|-----------|----------------|---------|
| 6502 |  Grey | bag       | 25 kg          | 50 bags |



8030334065026

### SHIELD

Hydrophobic pre-treatment for calcium silicate-based panels or porous and/or absorbent surfaces.

- High water repellency
- Water based product
- Ready to use
- Quick and easy application

Consumption is approximately 0.3 - 0.5 l/m<sup>2</sup>, but this can vary depending on the characteristics of the substrate.



| Code | Packaging | Packaging size | Pallet        |
|------|-----------|----------------|---------------|
| 5419 | canister  | 5 l            | 128 canisters |



8030334054198

## DEEP CLEANER

Biocide for sanitizing surfaces with mould and microbiological growths.

- High cleaning strength
- Miscible in water
- Wide range of action
- Quick and lasting effect



| Code | Packaging | Packaging size | Pallet        |
|------|-----------|----------------|---------------|
| 5424 | bottle    | 8x750 ml       | 46 cardboards |



8030334054242

## ANTISALE

Universal keying agent for protection against saline efflorescence.

- Excellent barrier against all salts
- Water based environment friendly product
- Good water repellent properties
- Ready to use

Depending on the porosity and smoothness of the background, consumption ranges from 0.3 to 0.5 litres/m<sup>2</sup>.



| Code | Packaging | Packaging size | Pallet        |
|------|-----------|----------------|---------------|
| 6344 | canister  | 5 l            | 128 canisters |



8030334063442

## 8.2 CEMENTITIOUS DEHUMIDIFICATION MORTARS

### RISAN ONE

Pre-mixed cementitious mortar 3-in-1. Multi-functional for the creation of renovation plasters on masonry affected by rising damp and saline efflorescence.

- Does not require saline efflorescence treatment
- Single product used for both keying and rendering
- High efflorescence resistance
- Excellent porosity and water repellent properties
- Quick to apply

Consumption: 13 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6337 | Grey  | bag       | 25 kg          | 50 bags |



8030334063374

### INTONACO WTA

Premixed plastering mortar for the renovation of masonry subject to rising capillary damp, according to EN 998-1 type R, WTA certified.

- New improved formula based on special cements
- Increased resistance to saline efflorescence and weather
- Improved resistance to nitrates
- Higher yield

Consumption: 12 kg/m<sup>2</sup>/cm



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6293 | Grey  | bag       | 25 kg          | 50 bags |



8030334062933

**DP 501**

Premixed cementitious mortar for dehumidifying plasters.

- Excellent breathability
- Good water repellency
- Optimized porosity
- Applicable by hand and machine

Consumo: 14 kg/m<sup>2</sup>/cm



| Code | Color                                                                                  | Packaging | Packaging size | Pallet  |
|------|----------------------------------------------------------------------------------------|-----------|----------------|---------|
| 5451 |  Grey | bag       | 25 kg          | 50 bags |

**8.3 DEHUMIDIFICATION FINISHING MORTARS****FINITURA**

Breathable, fine-grain premixed mortar for the finishing of renovating and/or dehumidifying plasters.

- Perfect compatibility with renovating and/or dehumidifying plasters
- High breathability and water repellence
- Excellent workability
- White and grey available

Consumo: 1,4 kg/m<sup>2</sup>/mm



| Code | Color                                                                                     | Packaging | Packaging size | Pallet  |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|---------|
| 6316 |  White | bag       | 25 kg          | 50 bags |



**FINISSIMO**

Very fine, breathable, premixed mortar to give a smooth finish to indoor renovation and/or dehumidifying plasters.

- Perfect compatibility with renovating and/or dehumidifying plasters
- High breathability
- Excellent workability
- Smooth finish

Consumo: 1,2 kg/m<sup>2</sup>/mm



| Code | Color                                                                                   | Packaging | Packaging size | Pallet  |
|------|-----------------------------------------------------------------------------------------|-----------|----------------|---------|
| 6529 |  White | bag       | 15 kg          | 50 bags |

**8.4 RENOVATION WITH CALCIUM SILICATE PANELS****BOND & FINISH**

Pre-mixed mineral mortar to be used to lay calcium-silicate panels, both as an adhesive for bonding to the support, and for the finishing and smoothing of fiberglass reinforcing mesh.

- Highly adhesive to the support surface
- Excellent workability
- Hardening with reduced stress
- High water vapour diffusion
- Attainable thickness of 2-5 mm
- Smooth finish

Consumption as adhesive: 3 - 7.5 kg/m<sup>2</sup>  
Consumption as finishing mortar: 1.5 kg/m<sup>2</sup>/layer



| Code | Color                                                                                     | Packaging | Packaging size | Pallet  |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|---------|
| 5361 |  White | bag       | 25 kg          | 50 bags |



## PANEL LIFE

Calcium silicate panel for interior applications, to resolve the problems of surface condensation, mould and harmful salts.

- Good thermal insulation
- High water vapour diffusion
- Non-combustible
- Natural non-hydraulic lime and silicate based product
- Can prevent the formation of surface condensation
- Simple, fast and economical to use



| Code  | Color                                                                                  | Dimensions | Thickness | Packaging | Packaging size | Pallet     |
|-------|----------------------------------------------------------------------------------------|------------|-----------|-----------|----------------|------------|
| 15528 |  Grey | 500x305 mm | 25 mm     | package   | 8 piece        | 384 pieces |



## 8.5 FINISHING MORTARS FOR FACADES AND WALLS

### R.E.D.

Pre-mixed fibre-reinforced mortar/plaster for regularisation, levelling and restoration work from 3 to 40 mm. Skim plaster for façade renovation with very high adhesion power and excellent workability, type GP CSII W0, according to EN 998-1, for restoration and levelling work, for thickness from 3 to 40 mm. For manual and machine applications.

- Adhesion to various substrates
- Fibre-reinforced
- Excellent workability
- For manual and mechanical applications

The consumption of R.E.D. is approx. 1.4 kg/m<sup>2</sup> each mm of thickness.



| Code | Color                                                                                     | Packaging | Packaging size | Pallet  |
|------|-------------------------------------------------------------------------------------------|-----------|----------------|---------|
| 5519 |  Ivory | bag       | 25 kg          | 50 bags |



## MULTIFINISH


Fibre-reinforced, thixotropic, cementitious mineral mortar for repairing and finishing various types of surfaces, up to 10 mm thickness.

- Excellent workability
- Excellent thixotropic properties
- Excellent quality of finish
- High breathability
- Low capillary absorption
- White colour
- Application thicknesses up to 10 mm

Consumption: 1,3 kg/m<sup>2</sup>/mm



| Code | Color | Packaging | Packaging size | Pallet        |
|------|-------|-----------|----------------|---------------|
| 5328 | White | bag       | 4x5 kg         | 40 cardboards |
| 5589 | Grey  | bag       | 25 kg          | 50 bags       |
| 5279 | White | bag       | 25 kg          | 50 bags       |



## STUCCOSOL

Very fine cement mortar for grouting and smoothing cement elements.



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 6035 | Grey  | bag       | 20kg           | 50 bags |



GP 100


Ready-to-use paste putty for indoor use.

Consumption: 0,6 kg/m<sup>2</sup>/mm



| Code | Color                       | Packaging | Packaging size | Pallet      |
|------|-----------------------------|-----------|----------------|-------------|
| 8063 | <div><div></div>White</div> | bucket    | 5 kg           | 120 buckets |
| 8064 | <div><div></div>White</div> | bucket    | 20kg           | 44 buckets  |



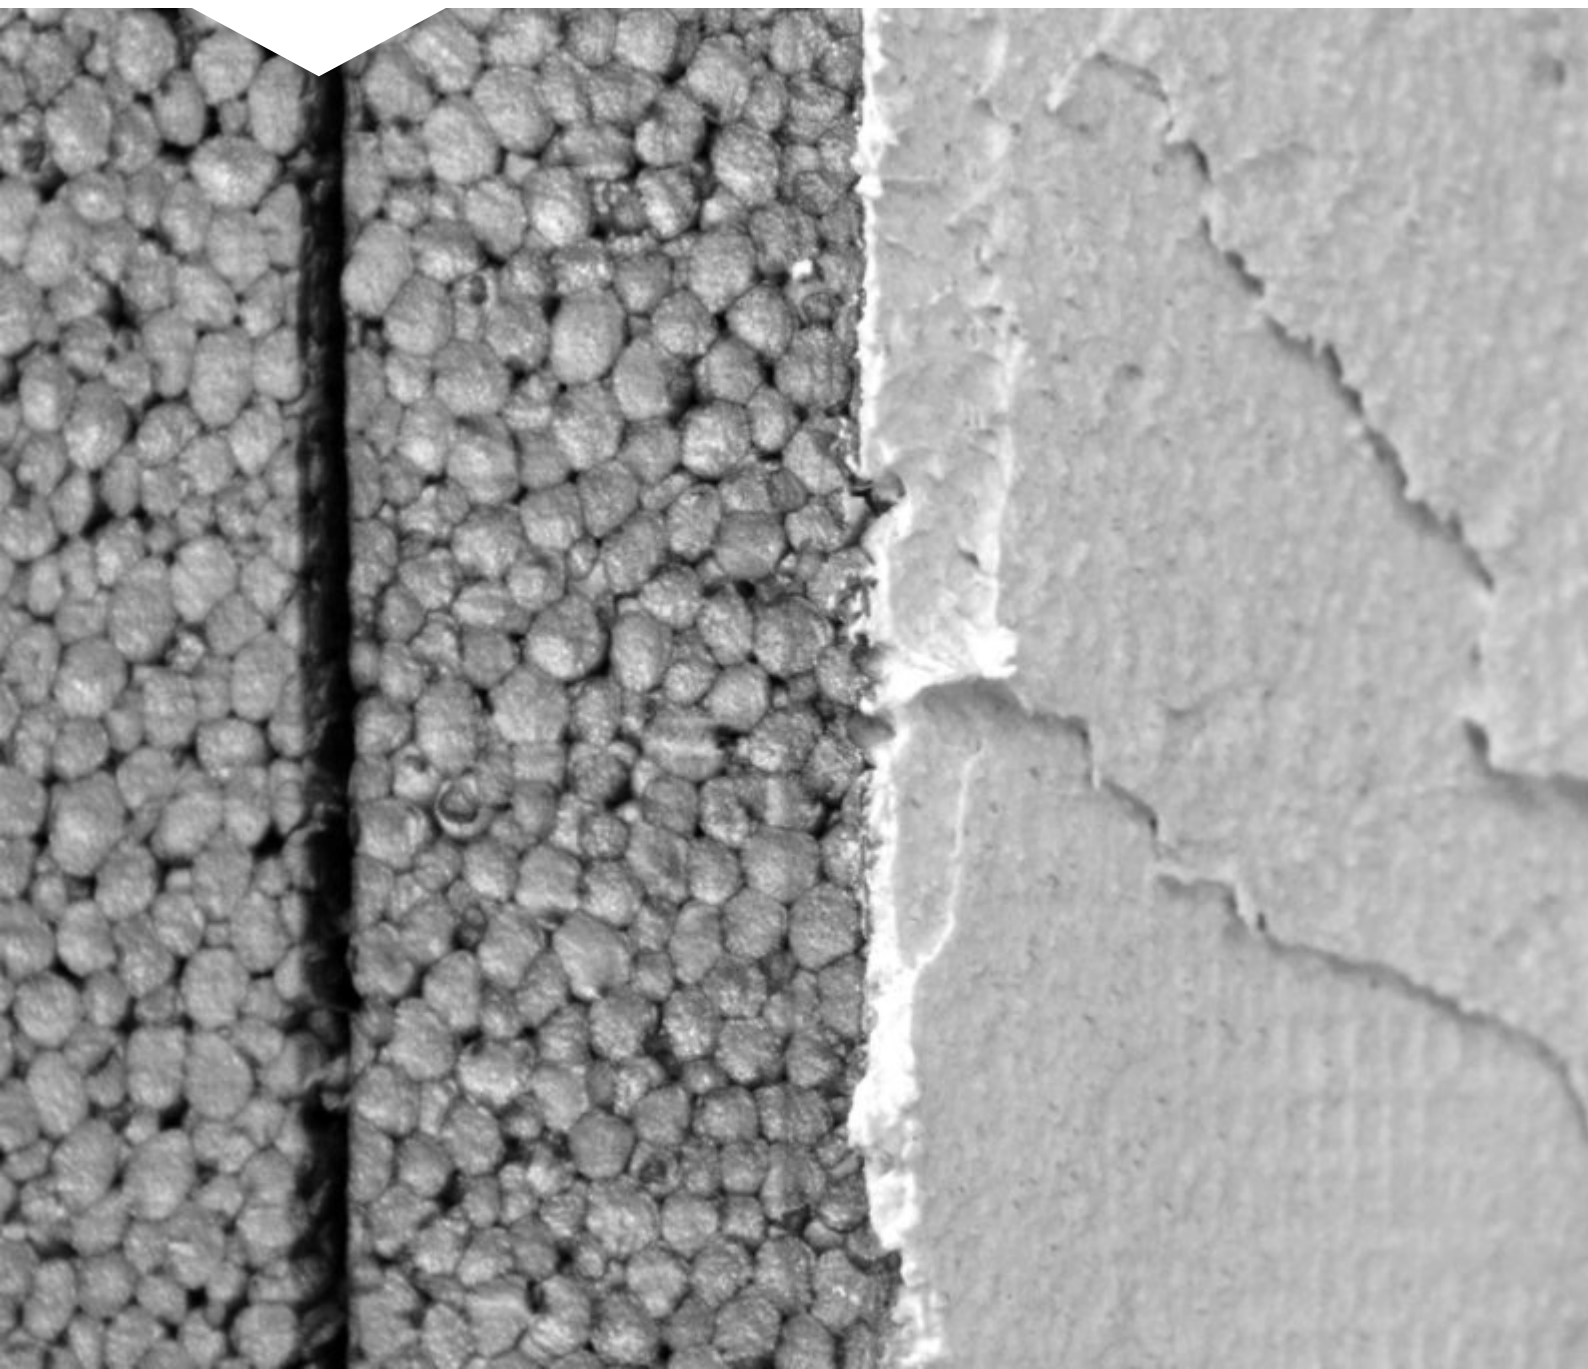

# 9. Thermal Insulation

9.1 Adhesives

9.2 Insulation Panels

9.3 Mechanical mounting

9.4 Accessories and System Components

9.5 Components for Air and Water Tightness

9.6 Installation items



## 9.1 ADHESIVES

### MASTOFIX® LIGHT मास्फिक्स

Adhesive and levelling compound based on cementitious, selected mineral aggregates, EPS fibres, additives. For bonding and smoothing of EPS, MW, and PIR-coated polyiso foam insulation panels.

- Excellent workability
- Light
- Low modulus of elasticity

As smoothing agent approx. 5 - 6 kg/m<sup>2</sup>, as adhesive approx. 3 - 4 kg/m<sup>2</sup>.



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 8325 | White | bag       | 20kg           | 50 bags |



8030334083259

### EKOMIX

Powder finishing mortar and adhesive made of cement, selected mineral aggregates, additives. For bonding and rendering polystyrene insulation panels. Component of the Ekomix EPS system.

Consumption: 3 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5428 | White | bag       | 25 kg          | 50 bags |
| 5427 | Grey  | bag       | 25 kg          | 50 bags |



8030334054280



8030334054273

## EKOMIX PLUS

Powder finishing mortar and adhesive made of cement, selected mineral aggregates, additives. For bonding and smoothing mineral wool insulation panels. Component of the Ekomix Wool system.

Consumption: 3 - 5 kg/m<sup>2</sup>



| Code | Color | Packaging | Packaging size | Pallet  |
|------|-------|-----------|----------------|---------|
| 5456 | White | bag       | 25 kg          | 50 bags |
| 5429 | Grey  | bag       | 25 kg          | 50 bags |



## 9.2 INSULATION PANELS

### ETICS WHITE RECYCLED ETICS

White mixed with grey sintered expanded polystyrene panel, cut by block, straight edge for the thermal insulation of vertical walls with insulation.

- Constant density
- Excellent cutting accuracy




| Code  | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |
|-------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|
| 15453 | 1000x500 mm | 30 mm     | package   | 20 piece       | 10 packages | 10 m <sup>2</sup>      | 100 m <sup>2</sup>    |
| 15454 | 1000x500 mm | 40 mm     | package   | 15 piece       | 10 packages | 7,5 m <sup>2</sup>     | 75 m <sup>2</sup>     |
| 15455 | 1000x500 mm | 50 mm     | package   | 12 piece       | 10 packages | 6 m <sup>2</sup>       | 60 m <sup>2</sup>     |
| 15456 | 1000x500 mm | 60 mm     | package   | 10 piece       | 10 packages | 5 m <sup>2</sup>       | 50 m <sup>2</sup>     |
| 15457 | 1000x500 mm | 80 mm     | package   | 7 piece        | 10 packages | 3,50 m <sup>2</sup>    | 35 m <sup>2</sup>     |
| 15458 | 1000x500 mm | 100 mm    | package   | 6 piece        | 10 packages | 3 m <sup>2</sup>       | 30 m <sup>2</sup>     |
| 15459 | 1000x500 mm | 120 mm    | package   | 5 piece        | 10 packages | 2,5 m <sup>2</sup>     | 25 m <sup>2</sup>     |
| 15460 | 1000x500 mm | 140 mm    | package   | 4 piece        | 10 packages | 2 m <sup>2</sup>       | 20 m <sup>2</sup>     |
| 15461 | 1000x500 mm | 160 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     |
| 15462 | 1000x500 mm | 180 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     |
| 15463 | 1000x500 mm | 200 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     |



**ETICS GREEN START** 

Sintered expanded polystyrene panel resistant to water absorption, cut from a block with a straight edge for making the starting skirting in heat insulation systems.

- Very high protection against water and humidity
- Excellent cutting precision
- Ideal for all applications where high mechanical strength and low water absorption are required (starting for "external insulations", ground bearing, roofing, subflooring, etc.)










| Code  | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |                                                                                                        |
|-------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|
| 15475 | 1000x500 mm | 30 mm     | package   | 20 piece       | 10 packages | 10 m <sup>2</sup>      | 100 m <sup>2</sup>    | <br>8030334154751   |
| 15476 | 1000x500 mm | 40 mm     | package   | 15 piece       | 10 packages | 7,5 m <sup>2</sup>     | 75 m <sup>2</sup>     | <br>8030334154768   |
| 15477 | 1000x500 mm | 50 mm     | package   | 12 piece       | 10 packages | 6 m <sup>2</sup>       | 60 m <sup>2</sup>     | <br>8030334154775   |
| 15478 | 1000x500 mm | 60 mm     | package   | 10 piece       | 10 packages | 5 m <sup>2</sup>       | 50 m <sup>2</sup>     | <br>8030334154782   |
| 15479 | 1000x500 mm | 80 mm     | package   | 7 piece        | 10 packages | 3,50 m <sup>2</sup>    | 35 m <sup>2</sup>     | <br>8030334154799   |
| 15480 | 1000x500 mm | 100 mm    | package   | 6 piece        | 10 packages | 3 m <sup>2</sup>       | 30 m <sup>2</sup>     | <br>8030334154805   |
| 15481 | 1000x500 mm | 120 mm    | package   | 5 piece        | 10 packages | 2,5 m <sup>2</sup>     | 25 m <sup>2</sup>     | <br>8030334154812  |
| 15482 | 1000x500 mm | 140 mm    | package   | 4 piece        | 10 packages | 2 m <sup>2</sup>       | 20 m <sup>2</sup>     | <br>8030334154829 |
| 15483 | 1000x500 mm | 160 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334154836 |
| 15484 | 1000x500 mm | 180 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334154843 |
| 15485 | 1000x500 mm | 200 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334154850 |

**ETICS BLACK ALL SEASON** 

Sintered expanded polystyrene panel with graphite/other carbon derivatives additive, cut from block, straight edge for the thermal insulation of vertical walls with coat.

- Constant density
- Excellent cutting accurac



| Code  | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |                                                                                                        |
|-------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|
| 15464 | 1000x500 mm | 30 mm     | package   | 20 piece       | 10 packages | 10 m <sup>2</sup>      | 100 m <sup>2</sup>    | <br>8030334154645   |
| 15465 | 1000x500 mm | 40 mm     | package   | 15 piece       | 10 packages | 7,5 m <sup>2</sup>     | 75 m <sup>2</sup>     | <br>8030334154652   |
| 15466 | 1000x500 mm | 50 mm     | package   | 12 piece       | 10 packages | 6 m <sup>2</sup>       | 60 m <sup>2</sup>     | <br>8030334154669   |
| 15467 | 1000x500 mm | 60 mm     | package   | 10 piece       | 10 packages | 5 m <sup>2</sup>       | 50 m <sup>2</sup>     | <br>8030334154676   |
| 15468 | 1000x500 mm | 80 mm     | package   | 7 piece        | 10 packages | 3,50 m <sup>2</sup>    | 35 m <sup>2</sup>     | <br>8030334154683   |
| 15469 | 1000x500 mm | 100 mm    | package   | 6 piece        | 10 packages | 3 m <sup>2</sup>       | 30 m <sup>2</sup>     | <br>8030334154690   |
| 15470 | 1000x500 mm | 120 mm    | package   | 5 piece        | 10 packages | 2,5 m <sup>2</sup>     | 25 m <sup>2</sup>     | <br>8030334154706  |
| 15471 | 1000x500 mm | 140 mm    | package   | 4 piece        | 10 packages | 2 m <sup>2</sup>       | 20 m <sup>2</sup>     | <br>8030334154713 |
| 15472 | 1000x500 mm | 160 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334154720 |
| 15473 | 1000x500 mm | 180 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334154737 |
| 15474 | 1000x500 mm | 200 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334154744 |

**EKOMIX PANEL EPS WHITE**


White sintered expanded polystyrene panel, cut by block, straight edge for the thermal insulation of vertical walls with coat.



| Code  | Color                                                                                     | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |                                                                                                        |
|-------|-------------------------------------------------------------------------------------------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|
| 15222 |  White   | 1000x500 mm | 40 mm     | package   | 15 piece       | 10 packages | 7,50 m <sup>2</sup>    | 75 m <sup>2</sup>     | <br>8030334152221   |
| 15223 |  White   | 1000x500 mm | 50 mm     | package   | 12 piece       | 10 packages | 6 m <sup>2</sup>       | 60 m <sup>2</sup>     | <br>8030334152238   |
| 15224 |  White   | 1000x500 mm | 60 mm     | package   | 10 piece       | 10 packages | 5 m <sup>2</sup>       | 50 m <sup>2</sup>     | <br>8030334152245   |
| 15225 |  White   | 1000x500 mm | 80 mm     | package   | 7 piece        | 10 packages | 3,50 m <sup>2</sup>    | 35 m <sup>2</sup>     | <br>8030334152252   |
| 15226 |  White   | 1000x500 mm | 100 mm    | package   | 6 piece        | 10 packages | 3 m <sup>2</sup>       | 30 m <sup>2</sup>     | <br>8030334152269   |
| 15227 |  White  | 1000x500 mm | 120 mm    | package   | 5 piece        | 10 packages | 2,50 m <sup>2</sup>    | 25 m <sup>2</sup>     | <br>8030334152276  |
| 15228 |  White | 1000x500 mm | 140 mm    | package   | 4 piece        | 10 packages | 2 m <sup>2</sup>       | 20 m <sup>2</sup>     | <br>8030334152283 |
| 15229 |  White | 1000x500 mm | 160 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334152290 |
| 15230 |  White | 1000x500 mm | 180 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334152306 |
| 15231 |  White | 1000x500 mm | 200 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334152313 |

**EKOMIX PANEL EPS GREY**


Sintered expanded polystyrene panel with graphite additive, cut from block, straight edge for the thermal insulation of vertical walls with coat.

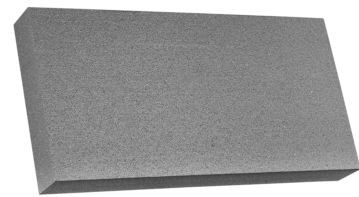

| Code  | Color                                                                                    | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |                                                                                                        |
|-------|------------------------------------------------------------------------------------------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|
| 15232 |  Grey   | 1000x500 mm | 40 mm     | package   | 15 piece       | 10 packages | 7,50 m <sup>2</sup>    | 75 m <sup>2</sup>     | <br>8030334152320   |
| 15233 |  Grey   | 1000x500 mm | 50 mm     | package   | 12 piece       | 10 packages | 6 m <sup>2</sup>       | 60 m <sup>2</sup>     | <br>8030334152337   |
| 15234 |  Grey   | 1000x500 mm | 60 mm     | package   | 10 piece       | 10 packages | 5 m <sup>2</sup>       | 50 m <sup>2</sup>     | <br>8030334152344   |
| 15235 |  Grey   | 1000x500 mm | 80 mm     | package   | 7 piece        | 10 packages | 3,50 m <sup>2</sup>    | 35 m <sup>2</sup>     | <br>8030334152351   |
| 15236 |  Grey   | 1000x500 mm | 100 mm    | package   | 6 piece        | 10 packages | 3 m <sup>2</sup>       | 30 m <sup>2</sup>     | <br>8030334152368   |
| 15237 |  Grey  | 1000x500 mm | 120 mm    | package   | 5 piece        | 10 packages | 2,50 m <sup>2</sup>    | 25 m <sup>2</sup>     | <br>8030334152375  |
| 15238 |  Grey | 1000x500 mm | 140 mm    | package   | 4 piece        | 10 packages | 2 m <sup>2</sup>       | 20 m <sup>2</sup>     | <br>8030334152382 |
| 15239 |  Grey | 1000x500 mm | 160 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334152399 |
| 15241 |  Grey | 1000x500 mm | 180 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334152412 |
| 15242 |  Grey | 1000x500 mm | 200 mm    | package   | 3 piece        | 10 packages | 1,50 m <sup>2</sup>    | 15 m <sup>2</sup>     | <br>8030334152429 |

**EKOMIX PANEL BASE**

Sintered polystyrene foam panel with external film transparent to resist water absorption printed on straight edge for the creation of the starting skirting in coat systems.



| Code  | Color                                                                                    | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |                                                                                                        |
|-------|------------------------------------------------------------------------------------------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|
| 15243 |  Grey   | 1000x600 mm | 60 mm     | package   | 9 piece        | 10 packages | 5,40 m <sup>2</sup>    | 54 m <sup>2</sup>     | <br>8030334152436   |
| 15244 |  Grey   | 1000x600 mm | 80 mm     | package   | 7 piece        | 10 packages | 4,20 m <sup>2</sup>    | 42 m <sup>2</sup>     | <br>8030334152443   |
| 15245 |  Grey   | 1000x600 mm | 100 mm    | package   | 5 piece        | 10 packages | 3 m <sup>2</sup>       | 30 m <sup>2</sup>     | <br>8030334152450   |
| 15246 |  Grey   | 1000x600 mm | 120 mm    | package   | 4 piece        | 12 packages | 2,40 m <sup>2</sup>    | 28,8 m <sup>2</sup>   | <br>8030334152467   |
| 15247 |  Grey   | 1000x600 mm | 140 mm    | package   | 4 piece        | 10 packages | 2,40 m <sup>2</sup>    | 24 m <sup>2</sup>     | <br>8030334152474   |
| 15248 |  Grey  | 1000x600 mm | 160 mm    | package   | 3 piece        | 12 packages | 1,80 m <sup>2</sup>    | 21,6 m <sup>2</sup>   | <br>8030334152481  |
| 15249 |  Grey | 1000x600 mm | 180 mm    | package   | 3 piece        | 10 packages | 1,80 m <sup>2</sup>    | 18 m <sup>2</sup>     | <br>8030334152498 |
| 15250 |  Grey | 1000x600 mm | 200 mm    | package   | 2 piece        | 14 packages | 1,20 m <sup>2</sup>    | 16,8 m <sup>2</sup>   | <br>8030334152504 |

## EKOMIX PANEL WOOL - P

Mineral wool insulation panels with double thickness for thermal insulation, soundproofing and fire protection, especially for thermal insulation composite systems. Manufactured in accordance with the required environmental criteria.

- Soundproofing properties
- Dimensional stability
- Fire protection



| Code  | Dimensions  | Thickness | Packaging | Packaging size | Pallet      | m <sup>2</sup> Package | m <sup>2</sup> Pallet |                                                                                                        |
|-------|-------------|-----------|-----------|----------------|-------------|------------------------|-----------------------|--------------------------------------------------------------------------------------------------------|
| 15298 | 1200x600 mm | 200 mm    | package   | 2 piece        | 6 packages  | 1,44 m <sup>2</sup>    | 8,64 m <sup>2</sup>   | <br>8030334152986   |
| 15297 | 1200x600 mm | 180 mm    | package   | 2 piece        | 6 packages  | 1,44 m <sup>2</sup>    | 8,64 m <sup>2</sup>   | <br>8030334152979   |
| 15296 | 1200x600 mm | 160 mm    | package   | 2 piece        | 8 packages  | 1,44 m <sup>2</sup>    | 11,52 m <sup>2</sup>  | <br>8030334152962   |
| 15294 | 1200x600 mm | 140 mm    | package   | 2 piece        | 8 packages  | 1,44 m <sup>2</sup>    | 11,52 m <sup>2</sup>  | <br>8030334152948   |
| 15293 | 1200x600 mm | 120 mm    | package   | 2 piece        | 10 packages | 1,44 m <sup>2</sup>    | 14,4 m <sup>2</sup>   | <br>8030334152931   |
| 15292 | 1200x600 mm | 100 mm    | package   | 4 piece        | 6 packages  | 2,88 m <sup>2</sup>    | 17,28 m <sup>2</sup>  | <br>8030334152924   |
| 15291 | 1200x600 mm | 80 mm     | package   | 5 piece        | 6 packages  | 3,6 m <sup>2</sup>     | 21,6 m <sup>2</sup>   | <br>8030334152917  |
| 15290 | 1200x600 mm | 60 mm     | package   | 5 piece        | 8 packages  | 3,6 m <sup>2</sup>     | 28,8 m <sup>2</sup>   | <br>8030334152900 |
| 15289 | 1200x600 mm | 50 mm     | package   | 5 piece        | 10 packages | 3,6 m <sup>2</sup>     | 36 m <sup>2</sup>     | <br>8030334152894 |

## 9.3 MECHANICAL MOUNTING

### ETICS TWISTER

Universal screw anchor for EPS, MW, PIR and PF insulation panels.



| Code  | Packaging size | Pallet        |                                                                                                        |
|-------|----------------|---------------|--------------------------------------------------------------------------------------------------------|
| 15450 | 100 piece      | 45 cardboards | <br>8030334154508 |

**ETICS TWISTER INSTALLATION TOOL** 

Adjustable mounting tool depending on the insulating panel thickness from 100 mm to 260 mm.

Rapid installation



| Code  | Dimensions | Packaging size |
|-------|------------|----------------|
| 15486 | 260 mm     | 1 piece        |

**TERMOZ CS II** 

Screw-in anchor for all types of insulation panels.



| Code  | Dimensions | Thickness | Packaging size | Pallet        |
|-------|------------|-----------|----------------|---------------|
| 15443 | 8x135 mm   | 100 mm    | 100 piece      | 54 cardboards |
| 15444 | 8x155 mm   | 120 mm    | 100 piece      | 45 cardboards |
| 15445 | 8x175 mm   | 140 mm    | 100 piece      | 45 cardboards |
| 15446 | 8x195 mm   | 160 mm    | 100 piece      | 45 cardboards |
| 15447 | 8x215 mm   | 180 mm    | 100 piece      | 45 cardboards |
| 15448 | 8x235 mm   | 200 mm    | 100 piece      | 45 cardboards |
| 15449 | 8x255 mm   | 220 mm    | 100 piece      | 45 cardboards |



**TERMOZ 6H** 

Screw-in anchor for installation on wooden structures, wooden panels, OSB, chipboards, MDF or gypsum fibre.



| Code  | Dimensions | Thickness | Packaging size | Pallet        |                                                                                                        |
|-------|------------|-----------|----------------|---------------|--------------------------------------------------------------------------------------------------------|
| 15427 | 80 mm      | 60 mm     | 100 piece      | 60 cardboards | <br>8030334154270   |
| 15428 | 100 mm     | 80 mm     | 100 piece      | 30 cardboards | <br>8030334154287   |
| 15429 | 120 mm     | 100 mm    | 100 piece      | 45 cardboards | <br>8030334154294   |
| 15430 | 140 mm     | 120 mm    | 100 piece      | 54 cardboards | <br>8030334154300   |
| 15431 | 160 mm     | 140 mm    | 100 piece      | 54 cardboards | <br>8030334154317   |
| 15432 | 180 mm     | 160 mm    | 100 piece      | 45 cardboards | <br>8030334154324   |
| 15433 | 200 mm     | 180 mm    | 100 piece      | 54 cardboards | <br>8030334154331   |
| 15434 | 220 mm     | 200 mm    | 100 piece      | 54 cardboards | <br>8030334154348 |
| 15435 | 240 mm     | 220 mm    | 100 piece      | 18 cardboard  | <br>8030334154355 |

**WASHER MW60** 


Hole cover disc made of mineral wool for Termoz CS II and Termow 6H screw-in anchors. Suitable for MW panels.



| Code  | Thickness | Packaging size | Pallet       |                                                                                                        |
|-------|-----------|----------------|--------------|--------------------------------------------------------------------------------------------------------|
| 15493 | 60 mm     | 100 piece      | 75 cardboard | <br>8030334154935 |

**WASHER PS60** 

Grey EPS cover plate for Termoz CS II and Termoz 6H screw-in anchors.  
Suitable for EPS and PIR panels.



| Code  | Color                                                                                  | Packaging size |
|-------|----------------------------------------------------------------------------------------|----------------|
| 15451 |  Grey | 100 piece      |



8030334154515

**ETICS SCREW-IN DOWEL INSTALLATION KIT** 

Installation kit for fastening Termoz CS II and Termoz 6H screw-in anchors.



| Code  | Packaging size |
|-------|----------------|
| 15495 | 1 piece        |



8030334154959

**TERMOZ CN 8** 

Percussion driven anchor with composite pin for all types of insulation panels.



| Code  | Dimensions | Thickness | Packaging size | Pallet        |                                                                                                      |
|-------|------------|-----------|----------------|---------------|------------------------------------------------------------------------------------------------------|
| 15436 | 110 mm     | 60 mm     | 100 piece      | 54 cardboards | <br>8030334154362 |
| 15437 | 130 mm     | 80 mm     | 100 piece      | 54 cardboards | <br>8030334154379 |
| 15438 | 150 mm     | 100 mm    | 100 piece      | 54 cardboards | <br>8030334154386 |
| 15439 | 170 mm     | 120 mm    | 100 piece      | 45 cardboards | <br>8030334154393 |
| 15440 | 190 mm     | 140 mm    | 100 piece      | 45 cardboards | <br>8030334154409 |
| 15441 | 210 mm     | 160 mm    | 100 piece      | 45 cardboards | <br>8030334154416 |
| 15442 | 230 mm     | 180 mm    | 100 piece      | 45 cardboards | <br>8030334154423 |

**MASONRY DRILL BIT SDS PLUS II** 

Drill bit for installing insulation anchors.



| Code  | Packaging size |                                                                                                        |
|-------|----------------|--------------------------------------------------------------------------------------------------------|
| 15494 | 1 piece        | <br>8030334154942 |

## 9.4 ACCESSORIES AND SYSTEM COMPONENTS

### RETE SSA

160 g alkali-resistant reinforcement mesh for ETICS systems, reinforced skim coats and for Wall Remedy System.

- In compliance with EAD 040083-00-0404
- Mesh 4x5 mm
- Alkali-resistant




| Code  | Packaging | Packaging size | Pallet   |
|-------|-----------|----------------|----------|
| 15594 | roll      | 1x50 m         | 33 rolls |



8030334155949

### REVEAL CORNER ANGLE FOR WINDOWS

Preformed three-dimensional reinforcement mesh for reinforcing the inside corners of window and door soffits on ETICS systems.




| Code  | Packaging size | Pallet        |
|-------|----------------|---------------|
| 15527 | 25 piece       | 24 cardboards |



8030334155277

**PVC MESH CORNER BEAD** 

PVC corner protection profile with fibreglass mesh for thermal insulation systems.




| Code  | Dimensions | Packaging size | Pallet |
|-------|------------|----------------|--------|
| 15502 | 2,5 m      | 125 m          | 5000 m |



8030334155024

**CORNER BEAD ROLL** 

Corner roll profile for variable angle creation with fibreglass mesh for thermal insulation systems.

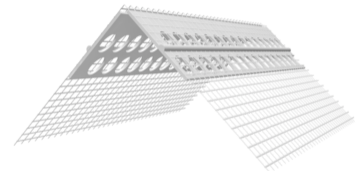


| Code  | Dimensions     | Packaging size | Pallet |
|-------|----------------|----------------|--------|
| 15506 | 12,5 x 12,5 cm | 25 m           | 600 m  |



8030334155062

**DRIP EDGE PROFILE** 

PVC corner profile with fibreglass mesh for making drip ledges on balconies, ledges, window lintels, horizontal edges.




| Code  | Dimensions | Packaging size | Pallet |
|-------|------------|----------------|--------|
| 15504 | 2,5 m      | 62,5 m         | 2500 m |



8030334155048

**SHEET METAL CONNECTION PROFILE** 


Connecting profile for flashings, adjustable, it guarantees a watertight seal and perfect aesthetics thanks to the hidden drip ledge.



| Code  | Dimensions | Packaging size | Pallet |
|-------|------------|----------------|--------|
| 15517 | 2,5 m      | 62,5 m         | 2500 m |

**PLASTER STOP PROFILE** 


End profile with mesh for perfect closure of façade coatings. It can be used on ETICS or reinforced skim coats up to 3 or 6 mm.



| Code  | Dimensions | Thickness | Packaging size | Pallet |
|-------|------------|-----------|----------------|--------|
| 15515 | 2,5 m      | 3 mm      | 62,5 m         | 2500 m |
| 15514 | 2,5 m      | 6 mm      | 62,5 m         | 2500 m |

**MOVEMENT JOINT PROFILE** 

Vertical expansion profile with protective tape and flexible band to ensure the aesthetic safety on façades of possible minor stresses on non-structural construction elements.

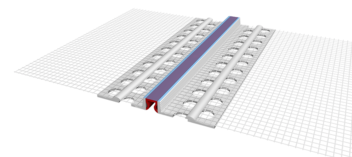


| Code  | Dimensions | Packaging size | Pallet |
|-------|------------|----------------|--------|
| 15516 | 2,5 m      | 62,5 m         | 625 m  |



**EXPANSION JOINT PROFILE E-SHAPE** 


Profile for linear expansion joints in façades in ETICS systems.



| Code  | Dimensions | Packaging size | Pallet   |
|-------|------------|----------------|----------|
| 15512 | 2,5 m      | 62,5 m         | 1312,5 m |

**EXPANSION JOINT PROFILE V-SHAPE** 


Profile for making angular expansion joints in façades in ETICS systems.



| Code  | Dimensions | Packaging size | Pallet   |
|-------|------------|----------------|----------|
| 15513 | 2,5 m      | 62,5 m         | 1312,5 m |

**MOVEMENT JOINT PROFILE HORIZONTAL PROFI PU** 

Horizontal expansion profile with integrated PE sealing tape to ensure a watertight seal, small movements and compressive stress of the joint located in the transition zone between two structures, e.g. between a solid and a lightweight construction.




| Code  | Dimensions | Packaging size |
|-------|------------|----------------|
| 15526 | 2,5 m      | 1 piece        |



**STANDARD WINDOW CONNECTION PROFILE**


PVC adhesive profile with fibreglass mesh for connecting windows, doors and similar elements.



| Code  | Dimensions | Packaging size | Pallet |
|-------|------------|----------------|--------|
| 15503 | 2,4 m      | 72 m           | 2880 m |

**WINDOW CONNECTION PROFILE 3D-PRO** 

Heavy-duty rainproof profile for plaster connections to windows, doors and similar construction elements with stress-relieving function in three 3D dimensions, protective lip and expanding seal.




| Code  | Dimensions | Packaging size | Pallet |
|-------|------------|----------------|--------|
| 15505 | 2,4 m      | 60 m           | 1260 m |



### WINDOW REVEAL ELEMENT LAI-SYS


Window reveal element Lai-Sys made of expanded polystyrene (EPS) for accommodating window and door reveals in thermal insulation systems.

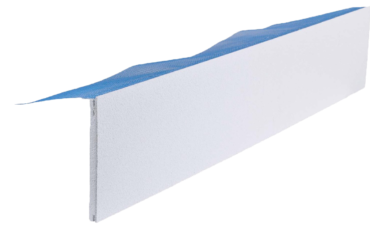

| Code  | Dimensions  |                                                                                                        |
|-------|-------------|--------------------------------------------------------------------------------------------------------|
| 15573 | 300x1350 mm | <br>8030334155734   |
| 15574 | 300x1600 mm | <br>8030334155741   |
| 15575 | 300x2000 mm | <br>8030334155758   |
| 15576 | 300x2500 mm | <br>8030334155765   |
| 15577 | 400x1350 mm | <br>8030334155772   |
| 15578 | 400x1600 mm | <br>8030334155789   |
| 15579 | 400x2000-mm | <br>8030334155796   |
| 15580 | 400x2500 mm | <br>8030334155802 |

## WINDOW LINTEL ELEMENT LAI-SYS


Window lintel element Lai-Sys made of expanded polystyrene (EPS) for accommodating window and door reveals in thermal insulation systems.

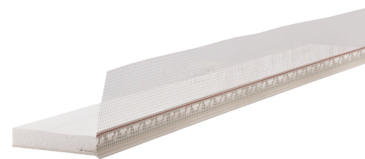

| Code  | Dimensions  |                                                                                                        |
|-------|-------------|--------------------------------------------------------------------------------------------------------|
| 15565 | 300x1350 mm | <br>8030334155659   |
| 15566 | 300x1600 mm | <br>8030334155666   |
| 15567 | 300x2000 mm | <br>8030334155673   |
| 15568 | 300x2500 mm | <br>8030334155680   |
| 15569 | 400x1350 mm | <br>8030334155697   |
| 15570 | 400x1600 mm | <br>8030334155703   |
| 15571 | 400x2000-mm | <br>8030334155710  |
| 15572 | 400x2500 mm | <br>8030334155727 |

## CONNECTOR PROFILE TYPE U

Connector profile type U for window reveal elements Lai-Sys.

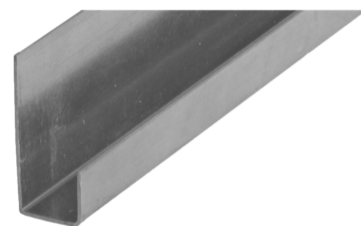

| Code  | Dimensions |                                                                                                        |
|-------|------------|--------------------------------------------------------------------------------------------------------|
| 15582 | 2500 mm    | <br>8030334155826 |

**CONNECTOR PROFILE TYPE U-AL**

Connector profile type U-AL for window reveal elements Lai-Sys.



| Code  | Dimensions |
|-------|------------|
| 15583 | 1350 mm    |
| 15584 | 1600 mm    |
| 15585 | 2000 mm    |
| 15586 | 2700 mm    |

**FIXING PINS**

For window reveal elements Lai-Sys.




| Code  | Packaging size |
|-------|----------------|
| 15581 | 370 pieces     |



**RUSTICATION MESH** 


Rusticated mesh for longitudinal reinforcement in the grooves of eTics systems.



| Code  | Detail | Dimensions  | Packaging size | Pallet |                                                                                                      |
|-------|--------|-------------|----------------|--------|------------------------------------------------------------------------------------------------------|
| 15518 | Typ 1  | 30x20x17 mm | 20 m           | 1000 m | <br>8030334155185 |
| 15520 | Typ 3  | 35x20x17 mm | 20 m           | 1000 m | <br>8030334155208 |
| 15519 | Typ 2  | 35x20x17 mm | 20 m           | 1000 m | <br>8030334155192 |

**RUSTICATION MESH FOR EXTERNAL CORNERS** 


Three-dimensional reinforcement mesh for external corners in the grooves of eTics systems.



| Code  | Detail | Packaging size | Pallet |                                                                                                        |
|-------|--------|----------------|--------|--------------------------------------------------------------------------------------------------------|
| 15521 | Typ 1  | 10 m           | 500 m  | <br>8030334155215 |
| 15522 | Typ 2  | 10 m           | 240 m  | <br>8030334155222 |
| 15523 | Typ 3  | 10 m           | 500 m  | <br>8030334155239 |

## ALUMINIUM BASE STARTER PROFILE


Aluminium starter profile to hold the insulation panel at the base of the system.



| Code  | Dimensions        | Thickness | Packaging size |                                                                                                        |
|-------|-------------------|-----------|----------------|--------------------------------------------------------------------------------------------------------|
| 15305 | 35x55 mm x 2,5 m  | 50 mm     | 20 piece       | <br>8030334153051   |
| 15306 | 35x65 mm x 2,5 m  | 60 mm     | 20 piece       | <br>8030334153068   |
| 15307 | 35x85 mm x 2,5 m  | 80 mm     | 20 piece       | <br>8030334153075   |
| 15308 | 35x105 mm x 2,5 m | 100 mm    | 20 piece       | <br>8030334153082   |
| 15309 | 35x125 mm x 2,5 m | 120 mm    | 20 piece       | <br>8030334153099   |
| 15310 | 35x145 mm x 2,5 m | 140 mm    | 10 piece       | <br>8030334153105   |
| 15311 | 35x165 mm x 2,5 m | 160 mm    | 10 piece       | <br>8030334153112   |
| 15312 | 35x185 mm x 2,5 m | 180 mm    | 10 piece       | <br>8030334153129 |
| 15313 | 35x205 mm x 2,5 m | 200 mm    | 10 piece       | <br>8030334153136 |

## CLIP ON PROFILE

Connection profile for aluminium starter profile, with hidden drip ledge.



| Code  | Dimensions | Packaging size | Pallet |                                                                                                        |
|-------|------------|----------------|--------|--------------------------------------------------------------------------------------------------------|
| 15509 | 2,5 m      | 62,5 m         | 2500 m | <br>8030334155093 |

**PVC BASIC BASEBOARD PROFILE** 


PVC starter profile, L-shaped, for thermal insulation system with thickness up to 240 mm in combination with the insertion profile.



| Code  | Detail | Dimensions | Thickness | Packaging size | Pallet |                                                                                                      |
|-------|--------|------------|-----------|----------------|--------|------------------------------------------------------------------------------------------------------|
| 15510 | L 55   | 2,5 m      | 120 mm    | 62,5 m         | 2500 m | <br>8030334155109 |
| 15507 | L 100  | 2,5 m      | 180 mm    | 37,5 m         | 1500 m | <br>8030334155079 |
| 15511 | L 160  | 2,5 m      | 240 mm    | 25 m           | 1000 m | <br>8030334155116 |

**PVC BASEBOARD PROFILE** 

PVC insertion profile in combination with starter profiles L55, L100, L160, hermetically seals and completes the starting point of ETICS systems, with hidden drip ledge.



| Code  | Dimensions | Packaging size | Pallet   |                                                                                                        |
|-------|------------|----------------|----------|--------------------------------------------------------------------------------------------------------|
| 15508 | 2,5 m      | 62,5 m         | 1312,5 m | <br>8030334155086 |

### NET EKOR A150

EKOR A150 is an alkali-resistant reinforcing mesh for thermal insulation systems, coatings and the Wall Remedy System.



| Code  | Packaging size |
|-------|----------------|
| 15487 | 1x50 m         |



## 9.5 COMPONENTS FOR AIR AND WATER TIGHTNESS

### SELF-EXPANDING JOINT SEALING TAPE EXP *EKOR*

Joint tape BG1 (600 Pa) is self-expanding pre-compressed sealing tape made of polyurethane foam impregnated with acrylic dispersion, for joints in building and construction, windows, metal constructions, timber houses, etc. It guarantee perfect thermal insulation between the window and the wall. If compressed between the two elements, they can be directly exposed to weather. They provide insulation against wind, draughts, noise, dust and rain.




| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15535 | 30/5-12    | roll      | 8x8 m          |
| 15534 | 20/5-12    | roll      | 12x8 m         |
| 15533 | 20/1-4     | roll      | 12x13 m        |
| 15532 | 15/1-4     | roll      | 16x13 m        |



**SELF-EXPANDING JOINT SEALING TAPE EXP BG2**

Joint tape BG2 (300 Pa) is self-expanding pre-compressed sealing tape made of polyurethane foam impregnated with acrylic dispersion, for joints in building and construction, windows, metal constructions, timber houses, etc. It guarantee perfect thermal insulation between the window and the wall. If compressed between the two elements, they can be directly exposed to weather. They provide insulation against wind, draughts, noise, dust and rain.

- Proprietà termiche isolanti
- Tenuta alla pioggia battente
- Resistenze alle intemperie oltre dieci anni
- Impermeabilità all'aria
- Resistente ai raggi UV: può rimanere a vista




| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15531 | 30/4-11    | roll      | 8x8 m          |

**SELF-EXPANDING JOINT SEALING TAPE EXP MULTI** *EKOR*

Multi-functional BG1/BGR pre-compressed, single-sided tape made of soft, fine-pored, permanently elastic polyurethane foam. For standard-compliant waterproofing of defined structural connection joints (windows and doors) and for sealing assembly joints between window and building shell.




| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15280 | 58/6-16    | roll      | 5x8 m          |
| 15281 | 64/6-16    | roll      | 4x8 m          |
| 15282 | 58/10-20   | roll      | 5x6 m          |
| 15283 | 64/10-20   | roll      | 4x6 m          |



## BUTYL TAPE GREY

Adhesive butyl sealing tape for airtight joints on the 4th side of the window.

- Compression adhesiveness
- Self-amalgamating
- Waterproof and self-sealing
- Excellent heat stability
- No oil transmigration



| Code  | Color                                                                                  | Dimensions | Packaging | Packaging size |
|-------|----------------------------------------------------------------------------------------|------------|-----------|----------------|
| 15590 |  Grey | 30x2 mm    | cartboard | 12x20 m        |




8030334155901

## PCV TAPE

Compression deformable PVC 4th side sealing tape to seal and adapt to frame cavities.

- Adhesive
- Excellent water resistance
- Deformable to compression
- Adapts to frame geometries, creating an airtight barrier




| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15530 | 50x6 mm    | roll      | 15 m           |



8030334155307

## PE TAPE

Single-sided adhesive, closed-cell PE sealing tape for the use on the underside of windows and doors. Maintains impermeability to water even in the presence of backwater.



| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15375 | 30x3 mm    | roll      | 10x20 m        |



8030334153754


## BUTYL TAPE WITH ALUFOIL

Butyl tape with aluminium foil for hermetic seals.

- Tear resistant
- Can be applied in cold conditions
- Excellent adhesion at low temperatures
- Waterproof and self-sealing
- High heat stability
- Anti-ageing and UV-resistant
- No oil transmigration



| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15591 | 40x0,6 mm  | cartboard | 12x20 m        |
| 15592 | 100x0,6 mm | cartboard | 8x10 m         |
| 15593 | 150x1 mm   | cartboard | 4x10 m         |




## EPDM MEMBRANE WITH BUTYL

EPDM membrane and perimeter seal for curtain walling/ventilated facades and window frames.

- Tear resistant
- Fast and easy installation
- Suitable for long-term contact with water or moisture
- UV-resistant
- High temperature resistance [-45 °C / +130 °C]
- High mechanical resistance



| Code  | Dimensions | Packaging | Packaging size |
|-------|------------|-----------|----------------|
| 15587 | 150x0,5 mm | cartboard | 2x20 m         |
| 15588 | 250x0,5 mm | cartboard | 20 m           |
| 15589 | 300x0,5 mm | cartboard | 20 m           |




## INSULATION MEMBRANE ISO INSIDE



| Code  | Detail | Dimensions | Packaging | Packaging size |
|-------|--------|------------|-----------|----------------|
| 15263 | Inside | 150 mm     | roll      | 25 m           |
| 15262 | Inside | 100 mm     | roll      | 25 m           |
| 15260 | Inside | 70 mm      | roll      | 25 m           |

INSULATION MEMBRANE ISO OUTSIDE *EKOR*

Insulating membrane for timber, PVC and aluminium windows and doors, made up of high-performance polymeric tape in water vapour-proof fabric (from the inside to the outside), which can be plastered and painted. The UV-resistant surface is coated with a high-quality acrylic adhesive. Applied on the inside of the primary joint between the wall and the sub-frame or window, it follows the movements of the connected parts thanks to its high elongation capacity.




| Code  | Detail  | Dimensions | Packaging | Packaging size |
|-------|---------|------------|-----------|----------------|
| 15264 | Outside | 70 mm      | roll      | 25 m           |
| 15265 | Outside | 100 mm     | roll      | 25 m           |
| 15266 | Outside | 150 mm     | roll      | 25 m           |



## 9.6 INSTALLATION ITEMS

### VARIR 120X160

Expansion moulded mounting block in EPS, with a high specific weight of 140 kg/m<sup>3</sup> for thermal bridge suppression when securing light loads.



| Code  | Dimensions      | Packaging size | Pallet    |
|-------|-----------------|----------------|-----------|
| 15379 | 120x160x1000 mm | 1 piece        | 75 pieces |



### VARIZ 90

Expansion moulded mounting cylinder in EPS, with a high specific weight of 140 kg/m<sup>3</sup> for thermal bridge suppression when securing light loads.



| Code  | Dimensions | Thickness | Packaging size | Pallet    |
|-------|------------|-----------|----------------|-----------|
| 15380 | 1000 mm    | Ø 90 mm   | 4 piece        | 90 pieces |



**MILLING TOOL ROD**

Element to be combined with the Ø 90 mm disc for fitting the VARIZ 90 mounting cylinder.



| Code | Packaging size |
|------|----------------|
|------|----------------|

|       |         |
|-------|---------|
| 15500 | 1 piece |
|-------|---------|



8030334155000

**MILLING TOOL PLATE**

Disc to match the depth milling bits for fitting VARIZ 90 mounting cylinder.



| Code | Thickness |
|------|-----------|
|------|-----------|


|       |         |
|-------|---------|
| 15501 | Ø 90 mm |
|-------|---------|



8030334155017

**ELECTRIC BOX E-LINE** *EKOR*

Insulated electrical box for securing electrical components in external thermal insulation systems, avoiding the formation of thermal bridges on the insulation.



| Code  | Dimensions | Thickness | Packaging size |
|-------|------------|-----------|----------------|
| 15354 | 150x150 mm | 80 mm     | 1 piece        |
| 15355 | 150x150 mm | 100 mm    | 1 piece        |
| 15356 | 150x150 mm | 120 mm    | 1 piece        |
| 15357 | 150x150 mm | 140 mm    | 1 piece        |
| 15358 | 150x150 mm | 160 mm    | 1 piece        |
| 15359 | 150x150 mm | 180 mm    | 1 piece        |
| 15360 | 150x150 mm | 200 mm    | 1 piece        |

**TRA WIK PU** *elks*

Mounting bracket made of rigid, rot-proof polyurethane foam, with three foam washers. The 20 mm grid on both sides marks the precise cut of the saw, allowing the desired thickness to be used, from 60 to 200 mm. Recommended for hinges and parapets. (incl. 3 screw anchors SXRL).



| Code  | Dimensions | Thickness | Packaging size |
|-------|------------|-----------|----------------|
| 15498 | 280x125 mm | 140 mm    | 1 piece        |
| 15499 | 280x125 mm | 200 mm    | 1 piece        |



**K1-PE**

Hinge mounting element.




| Code  | Dimensions | Thickness |                                                                                                        |
|-------|------------|-----------|--------------------------------------------------------------------------------------------------------|
| 15382 | 240x125 mm | 60 mm     | <br>8030334153822   |
| 15383 | 240x125 mm | 80 mm     | <br>8030334153839   |
| 15384 | 240x125 mm | 100 mm    | <br>8030334153846   |
| 15385 | 240x125 mm | 120 mm    | <br>8030334153853   |
| 15386 | 240x125 mm | 140 mm    | <br>8030334153860   |
| 15387 | 240x125 mm | 160 mm    | <br>8030334153877   |
| 15388 | 240x125 mm | 180 mm    | <br>8030334153884  |
| 15389 | 240x125 mm | 200 mm    | <br>8030334153891 |

**UMP ALU TR**

Rectangular plate for securing heavy loads in thermal insulation systems and preventing the formation of thermal bridges.



| Code  | Dimensions | Thickness | Packaging size |                                                                                                        |
|-------|------------|-----------|----------------|--------------------------------------------------------------------------------------------------------|
| 15339 | 238x138 mm | 80 mm     | 1 piece        | <br>8030334153396 |
| 15340 | 238x138 mm | 100 mm    | 1 piece        | <br>8030334153402 |
| 15341 | 238x138 mm | 120 mm    | 1 piece        | <br>8030334153419 |
| 15342 | 238x138 mm | 140 mm    | 1 piece        | <br>8030334153426 |
| 15343 | 238x138 mm | 160 mm    | 1 piece        | <br>8030334153433 |
| 15344 | 238x138 mm | 180 mm    | 1 piece        | <br>8030334153440 |
| 15345 | 238x138 mm | 200 mm    | 1 piece        | <br>8030334153457 |

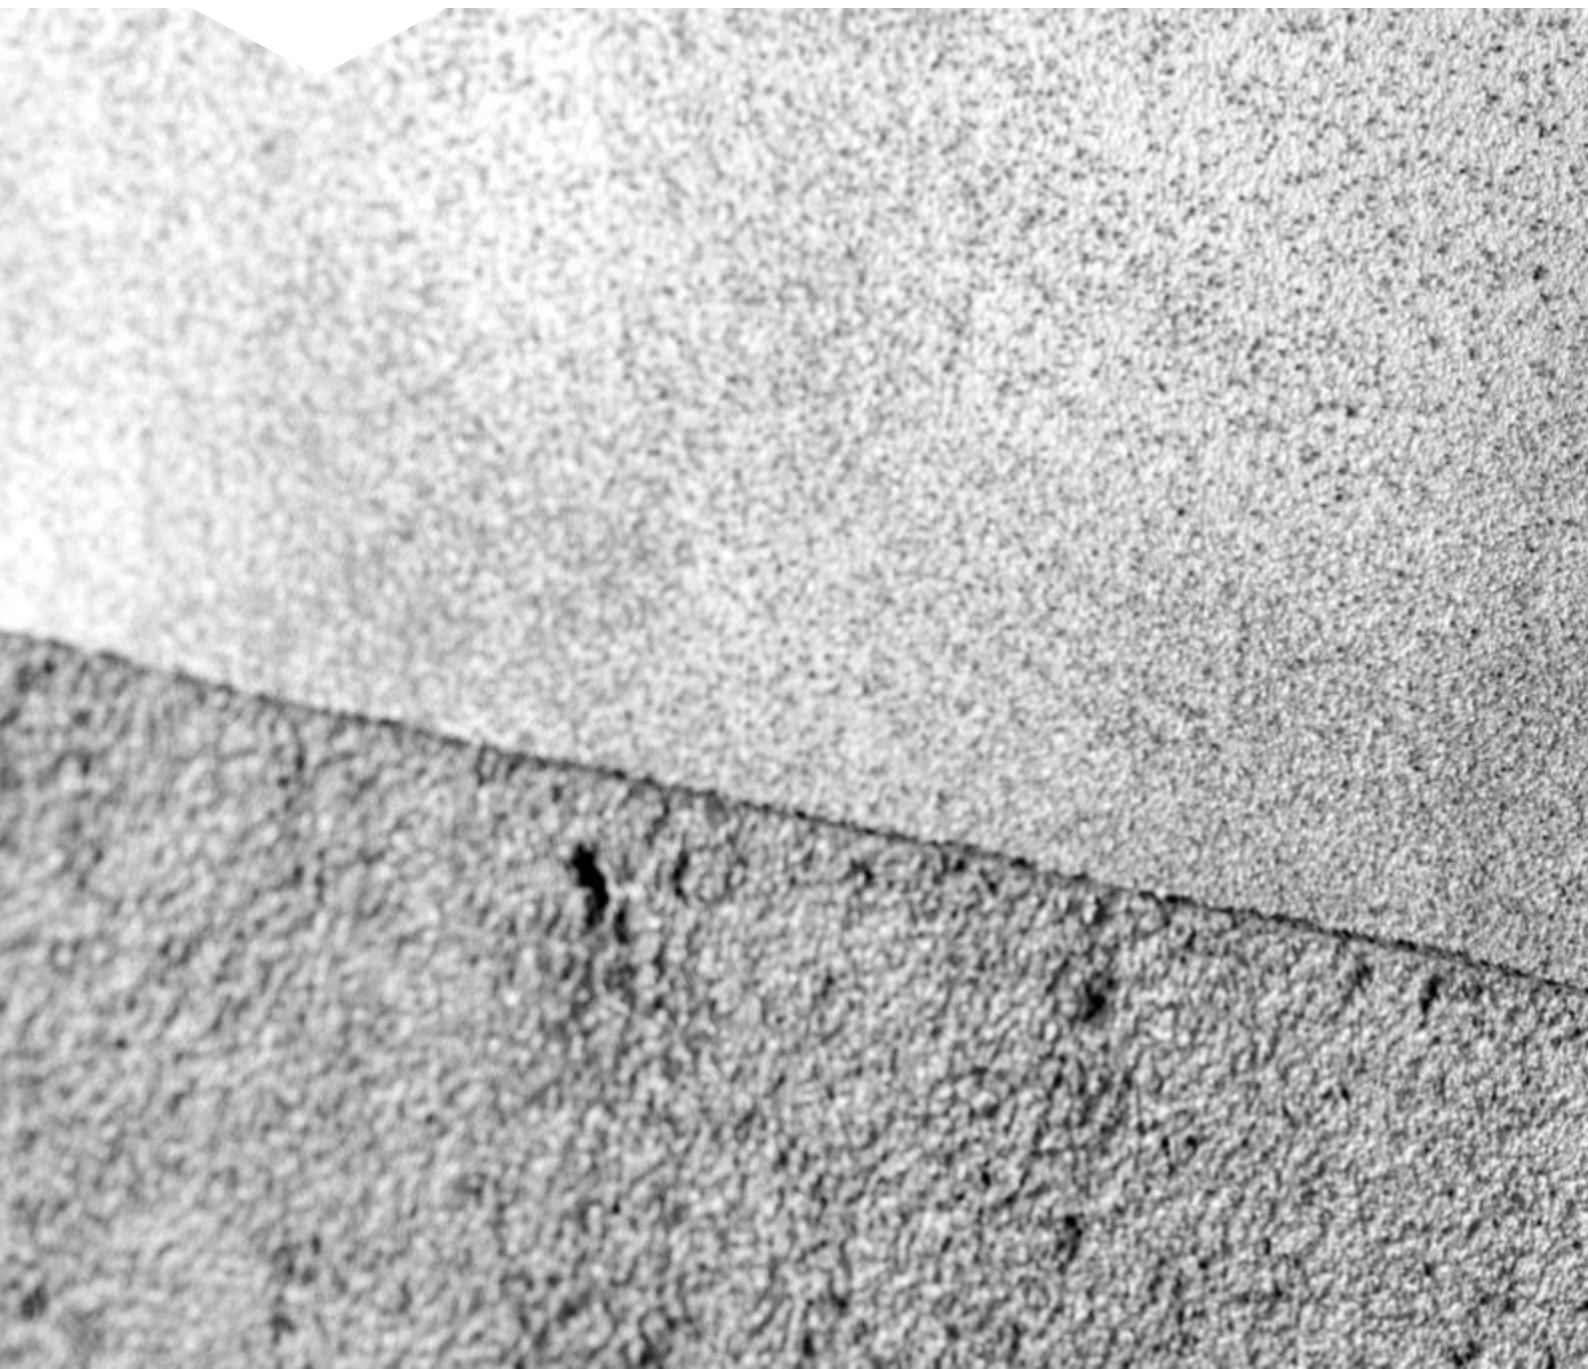

# 10. Paints and coatings

10.1 Primers for Coatings and Paints

10.2 Coatings

10.3 Paints



## 10.1 PRIMERS FOR COATINGS AND PAINTS

### PRIMER VIP

Universal pigmented primer with high filling and masking power, suitable for application of paste coatings on plasters, reinforced skim coats and eTics systems.

- High filling and masking power
- Suitable for eTics systems

Consumption: 10 l/m<sup>2</sup>



| Code | Color                                                                                      | Packaging size | Pallet     |
|------|--------------------------------------------------------------------------------------------|----------------|------------|
| 8194 |  White    | 14 l           | 33 buckets |
| 8195 |  Coloured | 14 l           | 33 buckets |



### CONSOLIDA

Highly penetrating water-based levelling and consolidating fixative.

Consumption: 7 - 10 m<sup>2</sup>/l



| Code | Color                                                                                           | Packaging size | Pallet       |
|------|-------------------------------------------------------------------------------------------------|----------------|--------------|
| 8193 |  Transparent | 20 l           | 33 canisters |



## 10.2 COATINGS

### SKIN ACRYL

Acrylic protective coating with compacted skim effect.

Consumption 1,0 mm: 1,8 - 2 l/m<sup>2</sup>

Consumption 1,2 mm: 2 - 2,4 l/m<sup>2</sup>

Consumption 1,5 mm: 2,2 - 3 l/m<sup>2</sup>



| Code | Color                                                                                        | Detail | Packaging | Packaging size | Pallet     | Price Class                                                                              |                                                                                                        |
|------|----------------------------------------------------------------------------------------------|--------|-----------|----------------|------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 8196 |  White      | 1.0 mm | bucket    | 25 kg          | 33 buckets | -                                                                                        | <br>8030334081965   |
| 8297 |  Coloured   | 1.0 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                   | <br>8030334082979   |
| 8293 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                     | <br>8030334082931   |
| 8294 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                    | <br>8030334082948   |
| 8295 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                   | <br>8030334082955   |
| 8296 |  Coloured | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334082962  |
| 8200 |  White    | 1.2 mm | bucket    | 25 kg          | 33 buckets | -                                                                                        | <br>8030334082009 |
| 8302 |  Coloured | 1.2 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                   | <br>8030334083020 |
| 8298 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                     | <br>8030334082986 |
| 8299 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                    | <br>8030334082993 |
| 8300 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                   | <br>8030334083006 |
| 8301 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334083013 |
| 8204 |  White    | 1.5 mm | bucket    | 25 kg          | 33 buckets | -                                                                                        | <br>8030334082047 |
| 8307 |  Coloured | 1.5 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                   | <br>8030334083075 |
| 8303 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                     | <br>8030334083037 |
| 8304 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                    | <br>8030334083044 |
| 8305 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                   | <br>8030334083051 |
| 8306 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334083068 |

**SKIN SILOXAN** 

1.0 / 1.2 / 1.5 mm siloxane-fibre-reinforced coating with a skimmed appearance.

Consumption 1,0 mm: 1,8 - 2 l/m<sup>2</sup>

Consumption 1,2 mm: 2 - 2,4 l/m<sup>2</sup>

Consumption 1,5 mm: 2,2 - 3 l/m<sup>2</sup>



| Code | Color                                                                                        | Detail | Packaging | Packaging size | Pallet     | Price Class                                                                            |                                                                                                        |
|------|----------------------------------------------------------------------------------------------|--------|-----------|----------------|------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 8247 |  White      | 1.0 mm | bucket    | 25 kg          | 33 buckets | -                                                                                      | <br>8030334082474   |
| 8312 |  Coloured   | 1.0 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                 | <br>8030334083129   |
| 8308 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                   | <br>8030334083082   |
| 8309 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                  | <br>8030334083099   |
| 8310 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                 | <br>8030334083105   |
| 8311 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC    | <br>8030334083112   |
| 8250 |  White      | 1.2 mm | bucket    | 25 kg          | 33 buckets | -                                                                                      | <br>8030334082504   |
| 8317 |  Coloured | 1.2 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                 | <br>8030334083174 |
| 8313 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                   | <br>8030334083136 |
| 8314 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                  | <br>8030334083143 |
| 8315 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                 | <br>8030334083150 |
| 8316 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334083167 |
| 8254 |  White    | 1.5 mm | bucket    | 25 kg          | 33 buckets | -                                                                                      | <br>8030334082542 |
| 8322 |  Coloured | 1.5 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                 | <br>8030334083228 |
| 8318 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                   | <br>8030334083181 |
| 8319 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                  | <br>8030334083198 |
| 8320 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                 | <br>8030334083204 |
| 8321 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334083211 |

**SKIN ACRIOLOXAN** 

Fibre-reinforced acryl-siloxane coating with compacted skim coat effect.

Consumption 1,0 mm: 1,8 - 2 l/m<sup>2</sup>Consumption 1,2 mm: 2 - 2,4 l/m<sup>2</sup>Consumption 1,5 mm: 2,2 - 3 l/m<sup>2</sup>

| Code | Color                                                                                        | Detail | Packaging | Packaging size | Pallet     | Price Class                                                                            |                                                                                                        |
|------|----------------------------------------------------------------------------------------------|--------|-----------|----------------|------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 8208 |  White      | 1.0 mm | bucket    | 25 kg          | 33 buckets | -                                                                                      | <br>8030334082085   |
| 8282 |  Coloured   | 1.0 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                 | <br>8030334082825   |
| 8278 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                   | <br>8030334082788   |
| 8279 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                  | <br>8030334082795   |
| 8280 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                 | <br>8030334082801   |
| 8281 |  Coloured   | 1.0 mm | bucket    | 25 kg          | 33 buckets | PC    | <br>8030334082818   |
| 8212 |  White      | 1.2 mm | bucket    | 25 kg          | 33 buckets | -                                                                                      | <br>8030334082122   |
| 8287 |  Coloured | 1.2 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                 | <br>8030334082870 |
| 8283 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                   | <br>8030334082832 |
| 8284 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                  | <br>8030334082849 |
| 8285 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                 | <br>8030334082856 |
| 8286 |  Coloured | 1.2 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334082863 |
| 8216 |  White    | 1.5 mm | bucket    | 25 kg          | 33 buckets | -                                                                                      | <br>8030334082160 |
| 8292 |  Coloured | 1.5 mm | bucket    | 2,5 kg         | 96 buckets | Sample                                                                                 | <br>8030334082924 |
| 8288 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC I                                                                                   | <br>8030334082887 |
| 8289 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC II                                                                                  | <br>8030334082894 |
| 8290 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC III                                                                                 | <br>8030334082900 |
| 8291 |  Coloured | 1.5 mm | bucket    | 25 kg          | 33 buckets | PC  | <br>8030334082917 |

## 10.3 PAINTS


FINISH SILOXAN 

Smooth siloxane paint with lotus effect.

Consumption per coat: 7-9 m<sup>2</sup>/l



| Code | Color                                                                                        | Packaging | Packaging size | Pallet      | Price Class                                                                              |
|------|----------------------------------------------------------------------------------------------|-----------|----------------|-------------|------------------------------------------------------------------------------------------|
| 8240 |  White      | bucket    | 14 l           | 33 buckets  | -                                                                                        |
| 8272 |  Coloured   | bucket    | 1 l            | 216 buckets | Sample                                                                                   |
| 8268 |  Coloured   | bucket    | 14 l           | 33 buckets  | PC I                                                                                     |
| 8269 |  Coloured   | bucket    | 14 l           | 33 buckets  | PC II                                                                                    |
| 8270 |  Coloured   | bucket    | 14 l           | 33 buckets  | PC III                                                                                   |
| 8271 |  Coloured | bucket    | 14 l           | 33 buckets  | PC  |


FINISH ACRYL 

Quartz-based acrylic paint for exterior wall surfaces with high filling power. Water-repellent, contains special anti-algae and anti-mould protective film.

Consumption per coat: 5-6 m<sup>2</sup>/l



| Code | Color                                                                                        | Packaging | Packaging size | Pallet      | Price Class                                                                              |
|------|----------------------------------------------------------------------------------------------|-----------|----------------|-------------|------------------------------------------------------------------------------------------|
| 8226 |  White    | bucket    | 14 l           | 33 buckets  | -                                                                                        |
| 8267 |  Coloured | bucket    | 1 l            | 216 buckets | Sample                                                                                   |
| 8263 |  Coloured | bucket    | 14 l           | 33 buckets  | PC I                                                                                     |
| 8265 |  Coloured | bucket    | 14 l           | 33 buckets  | PC III                                                                                   |
| 8266 |  Coloured | bucket    | 14 l           | 33 buckets  | PC  |
| 8264 |  Coloured | bucket    | 14 l           | 33 buckets  | PC II                                                                                    |



**FINISH ACRIOLOXAN** 

Highly filling quartz-based acryloyloxane paint.

Consumption per coat: 10-12 m<sup>2</sup>/l

| Code | Color                                                                                      | Packaging | Packaging size | Pallet     | Price Class                                                                            |                                                                                                      |
|------|--------------------------------------------------------------------------------------------|-----------|----------------|------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 8220 |  White    | bucket    | 14 l           | 33 buckets | -                                                                                      | <br>8030334082207 |
| 8262 |  Coloured | bucket    | 1 l            | 33 buckets | Sample                                                                                 | <br>8030334082627 |
| 8258 |  Coloured | bucket    | 14 l           | 33 buckets | PC I                                                                                   | <br>8030334082580 |
| 8259 |  Coloured | bucket    | 14 l           | 33 buckets | PC II                                                                                  | <br>8030334082597 |
| 8260 |  Coloured | bucket    | 14 l           | 33 buckets | PC III                                                                                 | <br>8030334082603 |
| 8261 |  Coloured | bucket    | 14 l           | 33 buckets | PC  | <br>8030334082610 |



# 11. Additives



## 11. ADDITIVES

### NEOPLAST GRIP

Additive based on special latex, modifying agent for hydraulic cements and limes with gripping adhesive function.



| Code | Packaging | Packaging size | Pallet       |
|------|-----------|----------------|--------------|
| 6503 | canister  | 5 kg           | 32 canisters |



### NEOPLAST LATEX


Additive based on special resins, modifying agent for cements and hydraulic limes with gripping adhesive function.



| Code | Packaging | Packaging size | Pallet        |
|------|-----------|----------------|---------------|
| 6097 | bottle    | 20x0,8 kg      | 24 cardboards |
| 6098 | canister  | 6kg            | 128 canisters |
| 6099 | canister  | 10kg           | 60 canisters  |
| 6100 | canister  | 25 kg          | 28 canisters  |





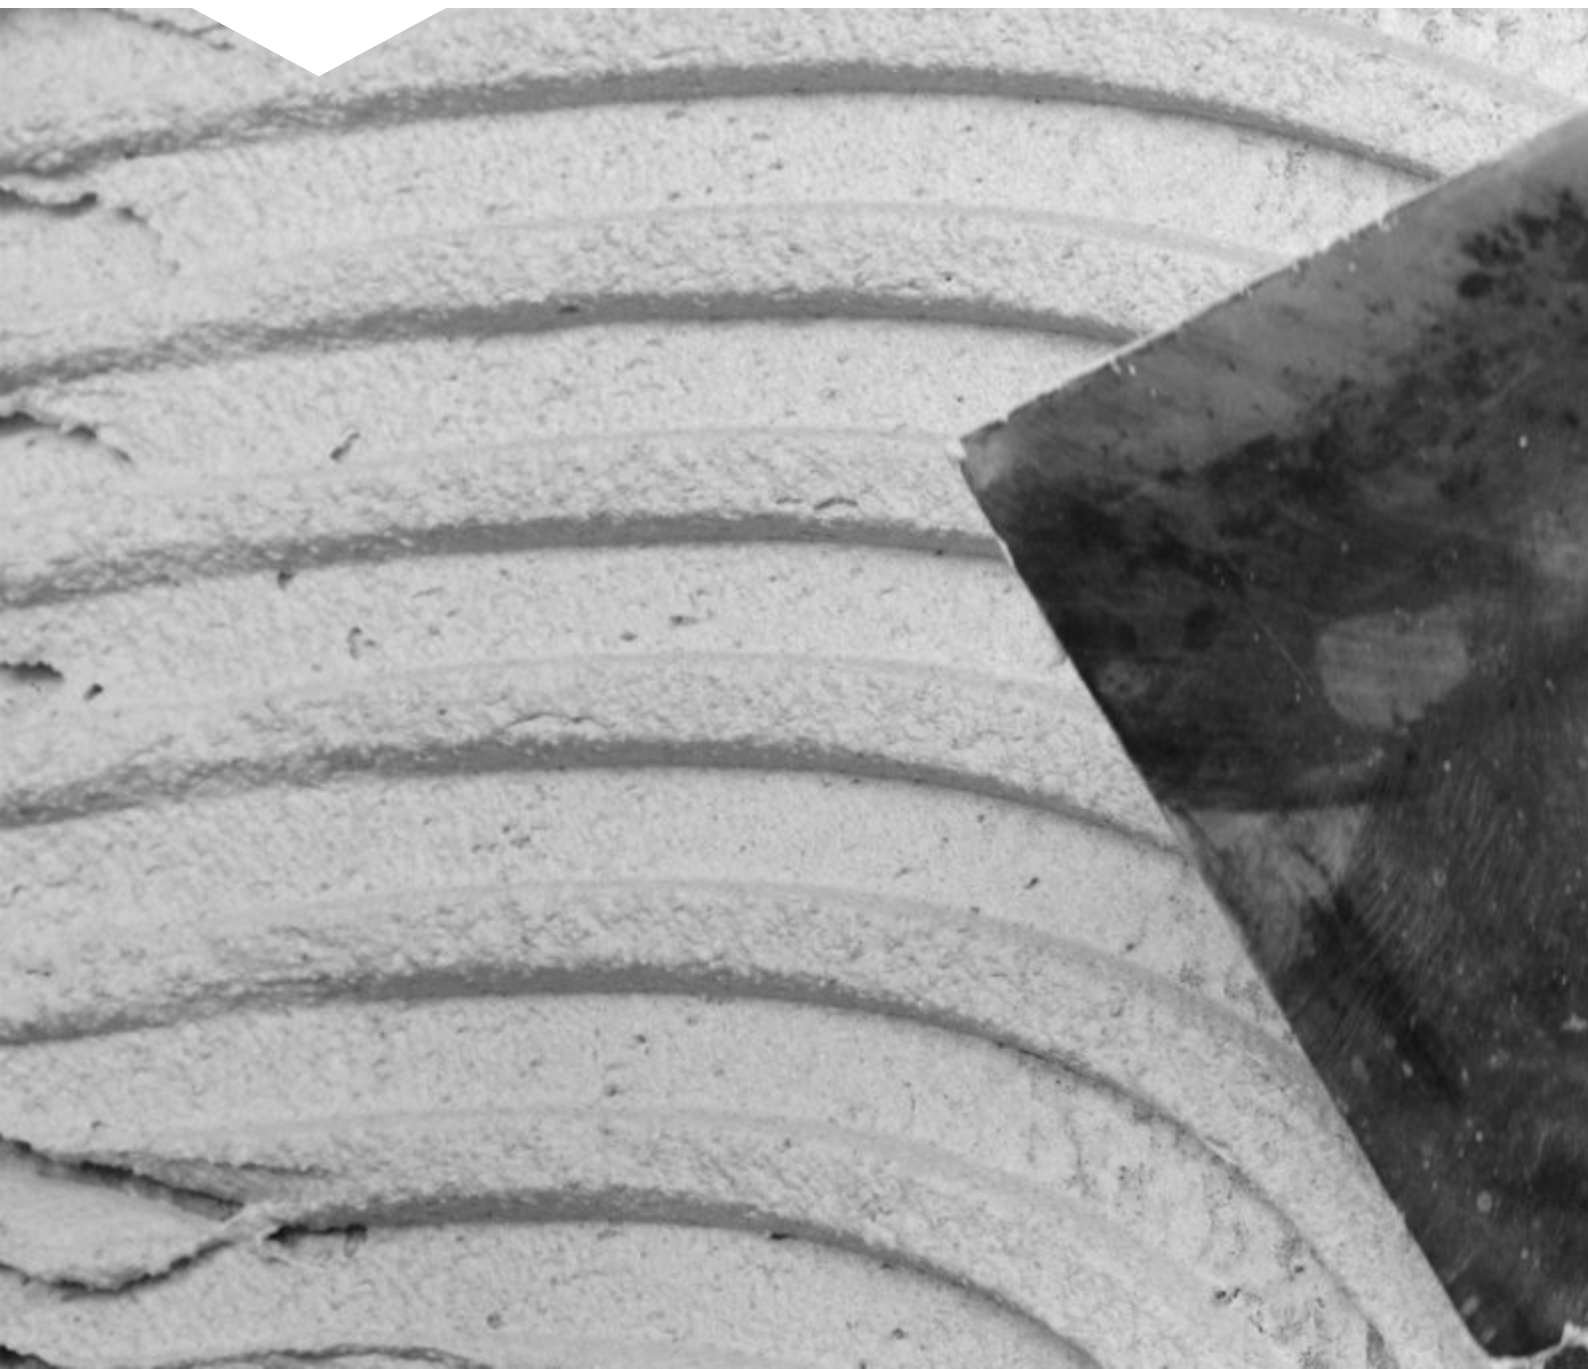

## 12. Tools



## 12. TOOLS

### MULTIPURPOSE GUN



| Code | Packaging size |
|------|----------------|
|------|----------------|

|       |         |
|-------|---------|
| 15008 | 1 piece |
|-------|---------|



8030334150081

### MANUAL CARTRIDGE GUN



| Code | Packaging size |
|------|----------------|
|------|----------------|

|       |         |
|-------|---------|
| 15287 | 1 piece |
|-------|---------|



8030334152870

GUN XTREME 300 PRO



| Code  | Packaging size |
|-------|----------------|
| 15257 | 1 piece        |



8030334152573

GUN XTREME 400 PRO



| Code  | Packaging size |
|-------|----------------|
| 15258 | 1 piece        |



8030334152580

POLYURETHANE FOAM GUN T500



| Code  | Packaging size |
|-------|----------------|
| 15288 | 1 piece        |



8030334152887

## POLYURETHANE FOAM GUN T2000



| Code  | Packaging | Packaging size |
|-------|-----------|----------------|
| 15011 | cartboard | 1 piece        |



8030334150111

## PVC CHOPPING BOARD WITH RUBBER HANDLE 280X130

PVC trowel with rubber handle, for applying acrylic, siloxane coatings for thermal insulation systems. Dimensions 280 x 130 x 2,5 mm.



| Code  | Dimensions | Packaging size |
|-------|------------|----------------|
| 15371 | 280x130 mm | 1 piece        |



8030334153716

## NOTCHED TROWEL WITH WOODEN HANDLE T12 480X130

Steel trowel with semicircular toothing 12 x 20 mm, with wooden handle, for applying coatings and adhesives for thermal insulation systems. Dimensions 480 x 130 x 0.6 mm.



| Code  | Detail | Dimensions | Packaging size |
|-------|--------|------------|----------------|
| 15372 | T12    | 480x130    | 1 piece        |



8030334153723

NOTCHED TROWEL WITH WOODEN HANDLE T16 480X130

Steel trowel with semi-circular toothing 16 x 20 mm, with wooden handle, for applying coatings and adhesives for thermal insulation systems. Dimensions 480 x 130 x 0.6 mm.



| Code  | Detail | Dimensions | Packaging size |
|-------|--------|------------|----------------|
| 15373 | T16    | 480x130    | 1 piece        |



TROWEL FOR RUSTICATION MESH 

Special tool for the application of the rustication mesh, consisting of 4 pieces, a stainless steel trowel and three interchangeable plastic profiles Typ 1, Typ 2 and Typ 3.



| Code  | Packaging size |
|-------|----------------|
| 15524 | 1 piece        |

